

Changes for the Better

MITSUBISHI








미쓰비시 범용 AC 서보



MELSERVO J2-Super

미쓰비시전기주식회사 나고야제작소는 환경매니지먼트시스템 ISO14001 및 품질시스템 ISO 9001의 인증 취득 공장입니다.



	(r/min)	(kW)				EN	UL cUL	(3)		
			(B)	(G1)	(G2, G5, G7)					
K HC-KFS 	3000 (4500)	5 0.05, 0.1, 0.2, 0.4, 0.75						IP55 (IP65(4))	(6000r/min, 10000r/min)	<ul style="list-style-type: none"> • • • X-Y • •
	6000 (6000)	1 0.4	-	-	-			IP55		
	10000 (10000)	1 0.4	-	-	-					
M HC-MFS 	3000 (4500)	5 0.05, 0.1, 0.2, 0.4, 0.75						IP55 (IP65(4))		<ul style="list-style-type: none"> • •
S HC-SFS 	1000 (1500:0.85kW 1200:1.2~3kW)	4 0.85, 1.2, 2.0, 3.0		-	-			IP65	3	<ul style="list-style-type: none"> • • • X-Y
	2000 (3000:0.5~1.5kW 2500:2, 3.5kW 2000:5.7kW)	14 0.5, 1.0, 1.5, 2.0, 3.5, 5.0, 7.0, 0.5, 1.0, 1.5, 2.0, 3.5, 5.0, 7.0						IP65		
	3000 (3000)	5 0.5, 1.0, 1.5, 2.0, 3.5	-	-				IP65		
L HC-LFS 	2000 (3000)	5 0.5, 1.0, 1.5, 2.0, 3.0		-	-			IP65		<ul style="list-style-type: none"> • • •
R HC-RFS 	3000 (4500)	5 1.0, 1.5, 2.0, 3.5 5.0		-				IP65		<ul style="list-style-type: none"> •
L HA-LFS 	1000 (1200)	16 6.0, 8.0, 12, 15, 20 25, 30, 37, 6.0, 8.0, 12, 15, 20, 25(6), 30, 37	(6.0~ 12kW)	-	-			IP44	3 30kW 가 (7)	<ul style="list-style-type: none"> • • •
	1500 (2000)	14 7.0() 11, 15, 22, 30, 37 7.0() 11, 15, 22, 30, 37, 45, 50	(7.0~ 15kW)	-	-			IP44		
	2000 (2000)	14 5.0, 7.0, 11, 15, 22, 30, 37, 11, 15, 22, 30, 37, 45, 55	(11~ 22kW)	-	-			IP44 HA-LFS502 /702 IP65		
U HC-UFS 	2000 (3000:0.75~2kW 2500:3.5, 5kW)	5 0.75, 1.5, 2.0, 3.5 5.0		-	-			IP65		<ul style="list-style-type: none"> • •
	3000 (4500)	4 0.1, 0.2, 0.4, 0.75		-	-			IP65 (5)		

1. ()
 2. ()
 3. ()
 4. 50W
 5. IP65 (HC-UFS -S1)
 6. 400V . HA-LFS 1000r/min 400V 6.0~12kW 20, 25kW
 7. 15~25kW 가

2.

131072p/rev(17bit)

-
-

CPU

- CPU 550Hz 가

가

- 가

SSCNET() : B

- SSCNET 0.888ms

- 가


-

-

- SSCNET 가

-


- 가 100

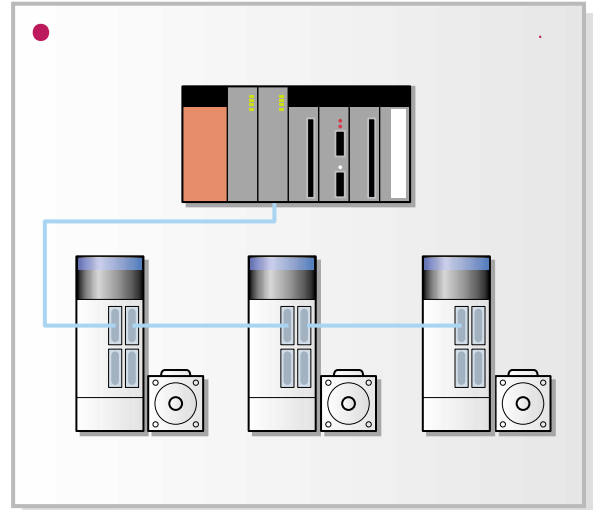


Global standard





3.

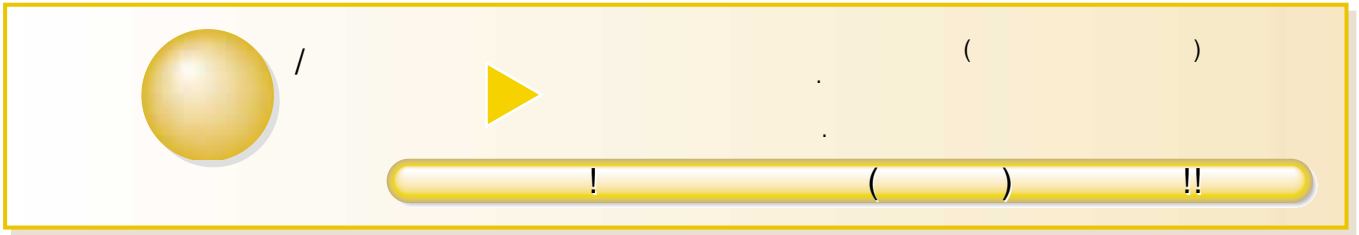

MR Configurator(-)

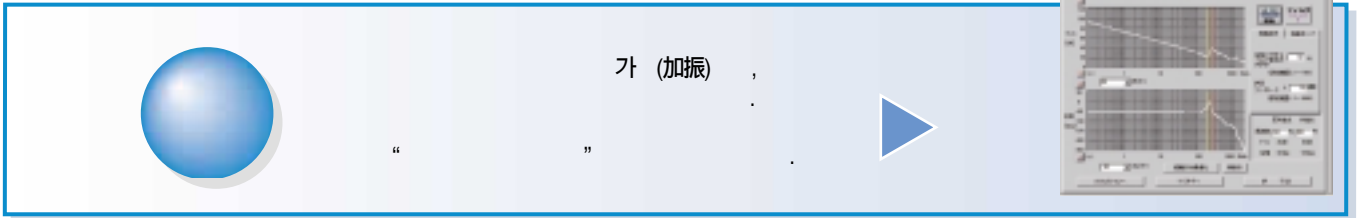

가 (加振)

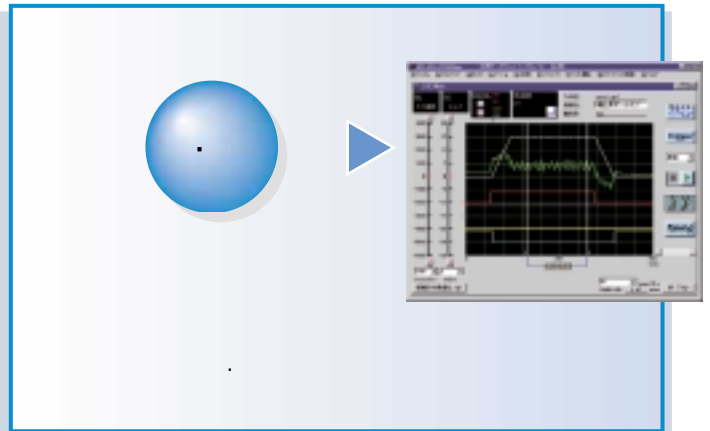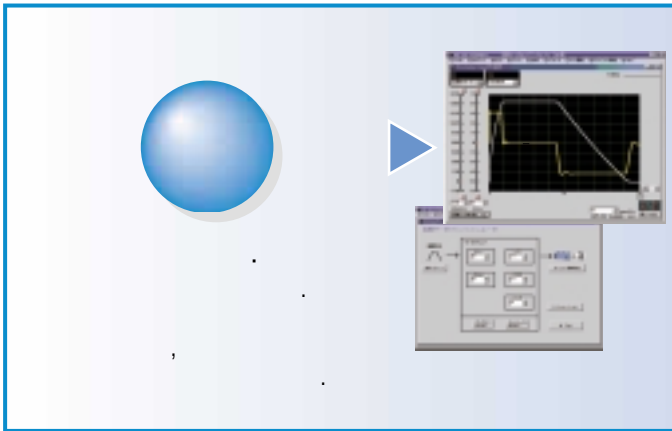

Contents

	A	B	CP	CL
	P.1	P.1	P.1	P.1
	P.5	P.5	P.5	P.5
	P.7	P.10	P.13	P.19
100V · 200V	P.8	P.11	P.15	P.23
400V	P.9	P.12	-	-
/	-	-	P.16	P.21
	P.24	P.27	P.28	P.30
/	P.31	P.31	P.31	P.31
CN2	P.33	P.33	P.33	P.33
CN3/CN4/CON2	P.35	P.35	P.35	P.35
HC - KFS	P.36	P.36	P.36	P.36
HC - MFS	P.37	P.37	P.37	P.37
HC - LFS	P.38	P.38	P.38	P.38
HC - SFS	P.39	P.39	P.39	P.39
HC - RFS	P.42	P.42	P.42	P.42
HA - LFS (1)	P.43	P.43	P.43	P.43
HC - UFS	P.49	P.49	P.49	P.49
	P.50	P.50	P.50	P.50
	P.52	P.52	P.52	P.52
	P.53	P.53	P.53	P.53
100V · 200V	P.55	P.59	P.55	P.55
400V (2)	P.55	P.59	-	-
	P.63	P.63	P.63	P.63
	P.64	P.64	-	-
	P.64	-	P.64	P.64
	P.65	P.65	P.65	P.65
	P.69	P.69	P.69	P.69
	P.69	P.69	P.69	P.69
	-	-	P.69	P.69
	-	-	P.69	P.69
	P.70	P.70	-	-

	A	B	CP	CL
MR Configurator	P.75	P.75	P.75	P.75
(-)	P.70	P.70	P.70	P.70
	P.70	P.70	P.70	P.70
	P.71	P.71	P.71	P.71
	P.72	P.72	P.72	P.72
	P.72	P.72	P.72	P.72
	P.72	P.72	P.72	P.72
	P.72	P.72	P.72	P.72
	P.72	P.72	P.72	P.72
EMC	P.73	P.73	P.73	P.73
() (3)	P.76	P.76	P.76	P.76
100V · 200V	P.77	P.77	P.77	P.77
400V	P.78	P.78	-	-
(30kW)	P.80	P.80	-	-
HC - KFS	P.81	P.81	P.81	P.81
HC - MFS	P.81	P.81	P.81	P.81
HC - SFS	P.89	P.89	P.89	P.89
HC - LFS	P.95	P.95	P.95	P.95
HC - RFS	P.96	P.96	P.96	P.96
HA - LFS (1)	P.100	P.100	P.100	P.100
HC - UFS	P.104	P.104	P.104	P.104
	P.106	P.106	P.106	P.106
(MR - J2)	P.122	P.122	P.122	P.122
	P.123	P.123	P.123	P.123
FA	P.126	P.126	P.126	P.126

1. MR - J2S - CP MR - J2S - CL 7kW
 2.
 3. (MRZJW3 - MOTSZ111)

100V/200V

MR - J2S - 10 A 1 - □

미쓰비시 범용 AC 서보앰프
MELSERVO-J2-Super 시리즈

특수 대응

A : 범용 인터페이스
B : SSCNET 대응
CP : 위치결정 기능 내장 (주)
CL : 프로그램운전 기능 내장 (주)
주) MR-J2S-CP 타입 및 CL 타입은 0.05~7kW로 대응하고 있습니다.

	AC200V	AC230V (1)
1	AC100V (2)	

) 1. AC230V MR-J2S-70
2. MR-J2S-40

	HC-KFS	HC-MFS	HC-SFS	HC-LFS	HC-RFS	HA-LFS	HC-UFS
EN, UL, cUL	10	053, 13	053, 13	-	-	-	13
	20	23	23	-	-	-	23
	40	43	43	-	-	-	43
	60	-	-	52, 53	52	-	-
	70	73, 46, 410	73	-	-	-	72, 73
	100	-	-	81, 102, 103	102	-	-
	200	-	-	121, 201, 152, 202, 153, 203	152	103, 153	152
	350	-	-	301, 352, 353	202	203	202
	500	-	-	502	302	353, 503	502, 352, 502
30kW	700	-	-	702	-	601, 701M, 702	-
(MR-HP30KA)	11K	-	-	-	-	801, 12K1, 11K1M, 11K2	-
	15K	-	-	-	-	15K1, 15K1M, 15K2	-
	22K	-	-	-	-	20K1, 25K1, 22K1M, 22K2	-
	30K	-	-	-	-	30K1, 30K1M, 30K2	-
	37K	-	-	-	-	37K1, 37K1M, 37K2	-

400V

MR - J2S - 30K A 4 - □

미쓰비시 범용 AC 서보앰프
MELSERVO-J2-Super 시리즈

특수 대응

A : 범용 인터페이스
B : SSCNET 대응

삼성 AC400V

	HC-SFS	HA-LFS
EN, UL, cUL	60	524
	100	1024
	200	1524, 2024
	350	3524
	500	5024
30kW	700	7024
(MR-HP55KA4)	11K	6014, 701M4
	15K	8014, 12K14, 11K1M4, 11K24
	22K	15K14, 15K1M4, 15K24
	30K	20K14, 22K1M4, 22K24
	37K	25K14, 30K14, 30K1M4, 30K24
	45K	37K14, 37K1M4, 37K24
	55K	45K1M4, 45K24
		50K1M4, 55K24

200V HC-MFS

05

3

B

HC-KFS	
HC-MFS	
HC-SFS	
HC-LFS	
HC-RFS	
HA-LFS	
HC-UFS	

EN, UL, cUL

	(kW)
05	0.05
1-8	0.1~0.85
10-80	1.0~8.0
11K-37K	11.0~37.0

	(r/min)
1	1000
1M	1500
2	2000
3	3000
6	6000
10	10000

G1	()
G1H	()(1)
G2	
G5	
G7	

B	
---	--

K	()
D	D ()

) 1. HC-SFS2000r/min
2. r

400V HA-LFS

30K

2

4

B

HC-SFS	
HA-LFS	

400V클래스

	(kW)
5	0.5
10-80	1.0~8.0
11K-55K	11.0~55.0

	(r/min)
1	1000
1M	1500
2	2000

G1	()(1)
G1H	()(1)
G2	(1)
G5	(1)
G7	(1)


B	
---	--

K	()
---	-----

) HA-LFS 1000r/min 6.0~12kW, 20kW, 25kW HA-LFS 1500r/min 7.0kW
) 1. HC-SFS2000r/min
2. r

MR-J2S-A

MR-J2S-A

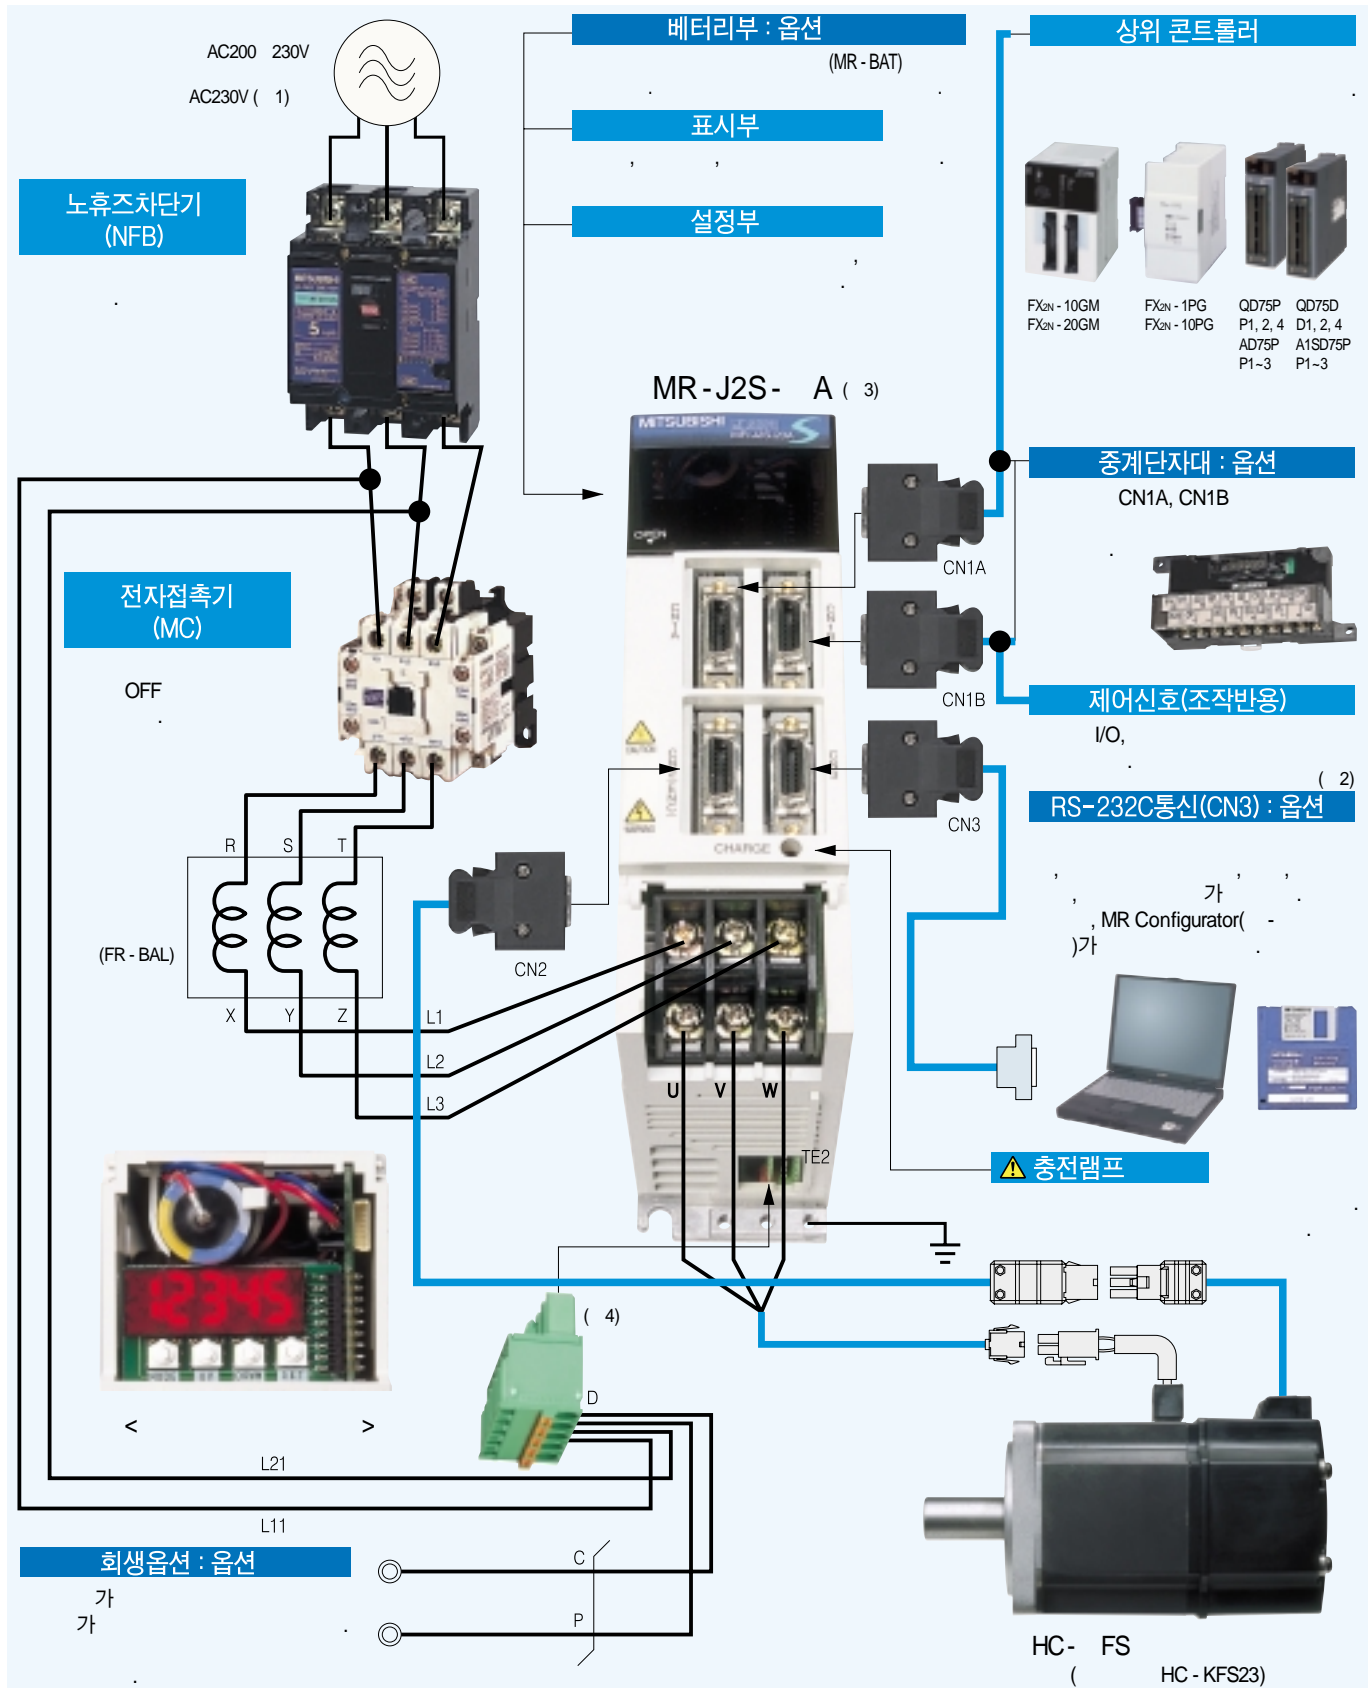

1. AC230V L1-L2 L3
2. RS-232C RS-422 RS-422 가
3. CN1 (MR-J2CN1) MR-J2S-500A MR-J2S-60A4(400V)
4. MR-J2S-100A MR-J2S-350A (MR-J2S-A-RT) 가

MELSERVO J2 Super

MR-J2S-A()

100V/200V

A

MR-J2S-		10A	20A	40A	60A	70A (-U)	100A	200A	350A	500A	700A	11KA	15KA	22KA	30KA	37KA	10A1	20A1	40A1	
																MR-HP30KA				
		AC200~230V/50, 60Hz																	AC100~120V/50, 60Hz	
		AC170~253V																	AC85~127V	
		±5%																	±5%	
	(W)	50																	50	
	(1)	AC200~230V/50, 60Hz AC230V/50, 60Hz(2)					AC200~230V/50, 60Hz(2)											AC100~120V/ 50, 60Hz(2)		
		AC200~230V		: AC170~253V		AC170~253V											AC85~127V			
		AC230V		: AC207~253V																
		±5%																	±5%	
		PWM																		
		(3)																	(3)	
		, , (), , , ,																		
		500kpps(), 200kpps()																		
		, 1 : 131072p/rev																		
		A/B A=1~65535 131072, B=1~65535 1/50<A/B<500																		
		0~±10000pulse()																		
		±2.5																		
		(DC 0~+10V/)																		
		1 : 2000, 1 : 5000																		
		DC 0~±10V / (4)																		
		±0.01% (0~100%)																		
		0%(±10%)																		
		±0.2% (25 ±10)																		
		(DC 0~+10V/)																		
		DC 0~±8V/ (10~12kΩ)																		
		(DC 0~±10V/)																		
		(IP00)			(IP00)											(IP00)				
		0~55 (), : -20~65 ()																		
		90%RH (가), : 90%RH (가)																		
		(), 가 가 가 가																		
	/	1000m / 5.9m/s ²																		
	(kg)	0.7	0.7	1.1	1.1	1.7	1.7	2.0	2.0	4.9	7.2	15	16	20	47	47	0.7	0.7	1.1	
	()															AC200~ 230V/50, 60Hz (2)		-		
																AC170~ 253V/50, 60Hz		-		
																±5%		-		
																AC200~ 230V/50, 60Hz		-		
																AC170~ 253V/50, 60Hz		-		
																±5%		-		
	(W)															50		-		
	(kg)															22		-		


- 1.
- 2.
- 3. (MR-J2S-A-ED MR-J2S-A1-ED) 가
- 4. 10V No.25 가

MR-J2S-	10A~70A	100A~350A	500A, 700A	11KA~22KA	30KA, 37KA	10A1~40A1
	P.24~26					
/	P.31	P.31	P.31	P.32	P.32	P.31
CN2	P.33		P.33, P.34		P.34	P.33
CN3/CN4/CON2	P.35			P.35		P.35


MR-J2S-B

MR-J2S-B

MR-J2S-B SSCNET

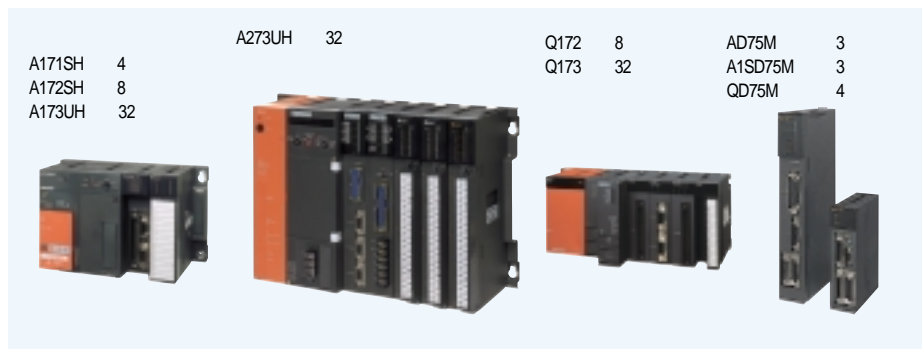

SSCNET

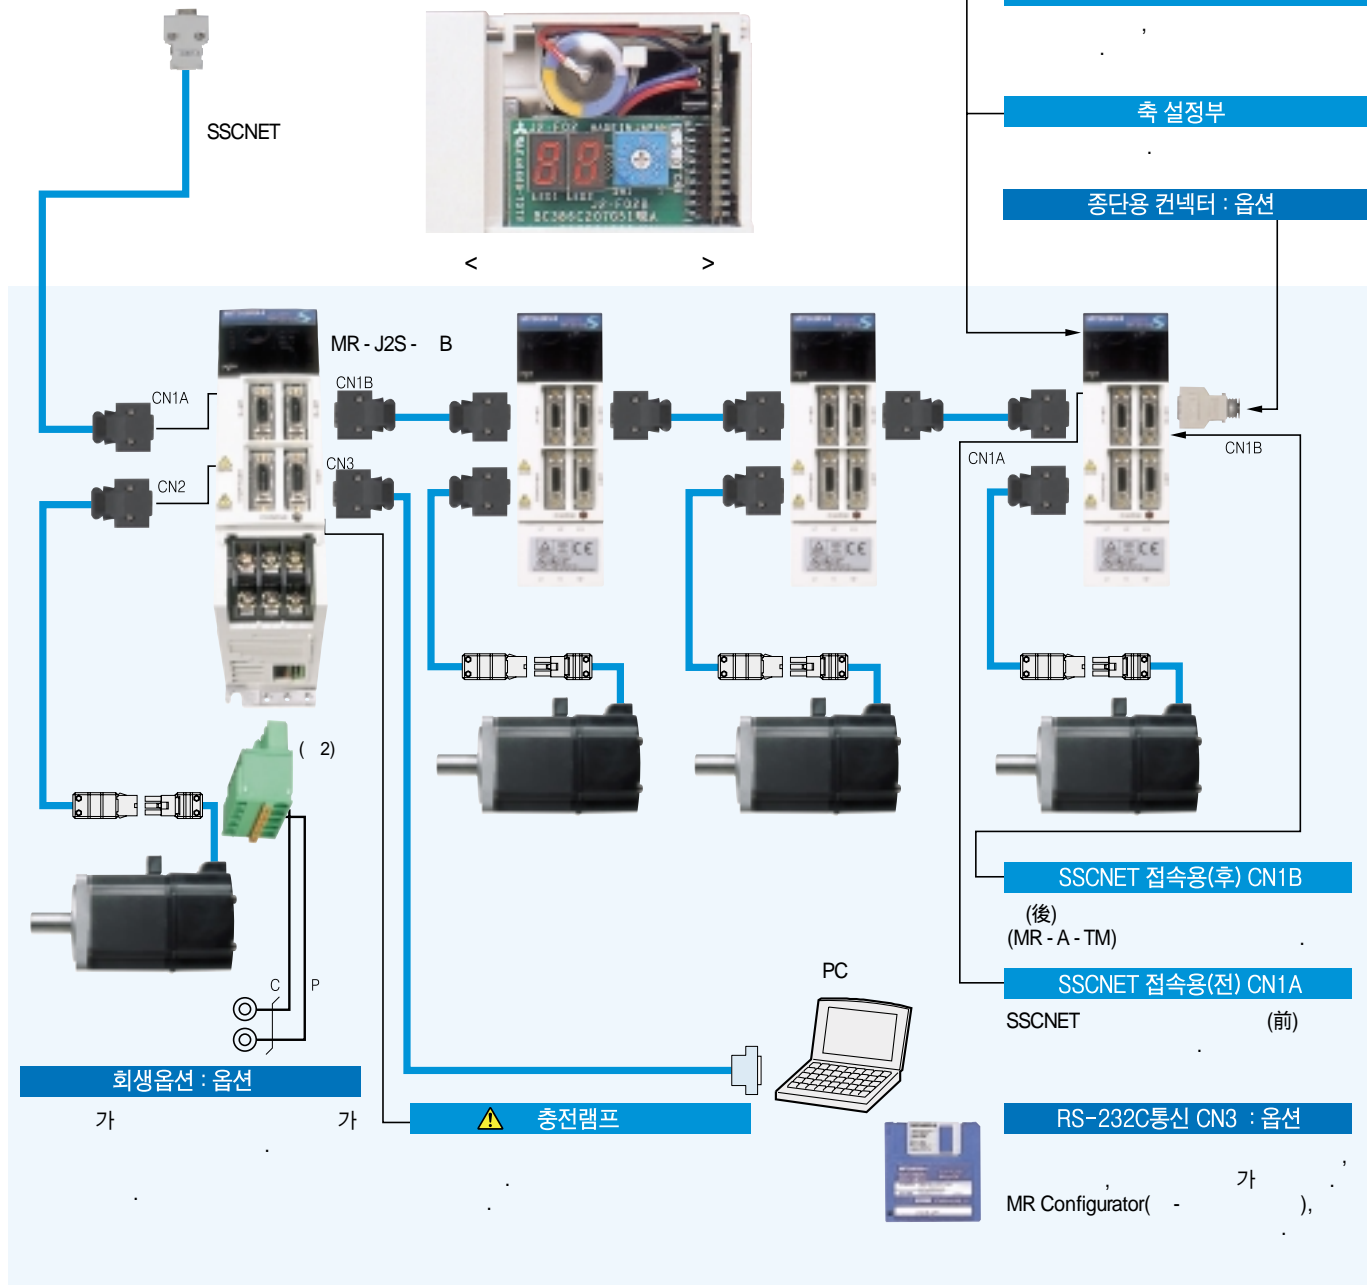

) MR-J2S-350B P.7
 MR-J2S-500B)
 2) MR-J2S-100B MR-J2S-60B4(400V)

(MR-J2S- B-RT)

MR-J2S-B(SSCNET)

100V/200V

MR-J2S-		10B	20B	40B	60B	70B (-U)	100B	200B	350B	500B	700B	11KB	15KB	22KB	30KB	37KB	10B1	20B1	40B1	
																MR-HP30KA				
		AC200~230V/50, 60Hz														AC100~120V/50, 60Hz				
		AC170~253V														AC85~127V				
		±5%														±5%				
(W)		50														50				
(1)		AC200~230V/50, 60Hz AC230V/50, 60Hz(2)					AC200~230V/50, 60Hz(2)										AC100~120V 50, 60Hz(2)			
		AC200~230V : AC170~253V AC230V : AC207~253V					AC170~253V										AC85~127V			
		±5%														±5%				
		PWM																		
		(3)														(3)				
		10Mpps																		
		(IP00)					(IP00)										(IP00)			
		0~55 (), : -20~65 ()																		
		90%RH (가), : 90%RH (가)																		
		(), 가 . 가 . 가																		
		1000m																		
		5.9m/s ²																		
(kg)		0.7	0.7	1.1	1.1	1.7	1.7	2.0	2.0	4.9	7.2	15	16	20	47	47	0.7	0.7	1.1	
(1)																AC200~230V/50, 60Hz(2)				
																AC170~253V/50, 60Hz				
																±5%				
																AC200~230V/50, 60Hz				
																AC170~253V/50, 60Hz				
(W)																±5%				
(kg)																50				
																22				

- 1.
- 2.
3. (MR-J2S-B-ED MR-J2S-B1-ED) 가

MR-J2S-	10B~70B	100B~350B	500B, 700B	11KB~22KB	30KB, 37KB	10B1~40B1
	P.27					
/	P.31	P.31	P.31	P.32	P.32	P.31
CN2	P.33	P.33, P.34		P.34		P.33
CN3/CN4/CON2	P.35			P.35		P.35

400V

MR-J2S-		60B4	100B4	200B4	350B4	500B4	700B4 (-U)	11KB4 (-U)	15KB4 (-U)	22KB4 (-U)	30KB4 (-U)	37KB4	45KB4	55KB4	
		-										MR - HP55KA4			
		DC24V					AC380~480V/50, 60Hz								
		DC20.4~27.6V					AC323~528V								
		-					±5%								
		(W) 25					50								
	(1)	AC380~480V/50, 60Hz(2)													
		AC323~528V													
		±5%													
	PWM														
	10Mpps														
	(IP00)														
	0~55 (), : -20~65 ()														
	90%RH (가), : 90%RH (가)														
	(), 가 . 가 . 가														
	1000m														
		5.9m/s ²													
		(kg)	2.1	2.2	2.2	5	5	7.2	15	16	20	36	47	47	47
	(1)	-										AC380~480V/50, 60Hz(2)			
		-										AC323~528V/50, 60Hz			
		-										±5%			
	-										AC380~480V/50, 60Hz				
	-										AC323~528V/50, 60Hz				
	-										±5%				
	(W)										50				
(kg)										22					

) 1.
2.


MR-J2S-		60B4~200B4			350B4, 500B4		700B4	11KB4~22KB4			30KB4~55KB4		
		P.27											
	/	P.32			P.32			P.32			P.32		
	CN2	P.33					P.33 P.34	P.34					
	CN3/CN4/CON2	P.35						P.35					

MR-J2S-CP


- (), , 가 .
- DI/O .
- RS-422 (32) 가 .

MR-J2S-CP

<DI/O >

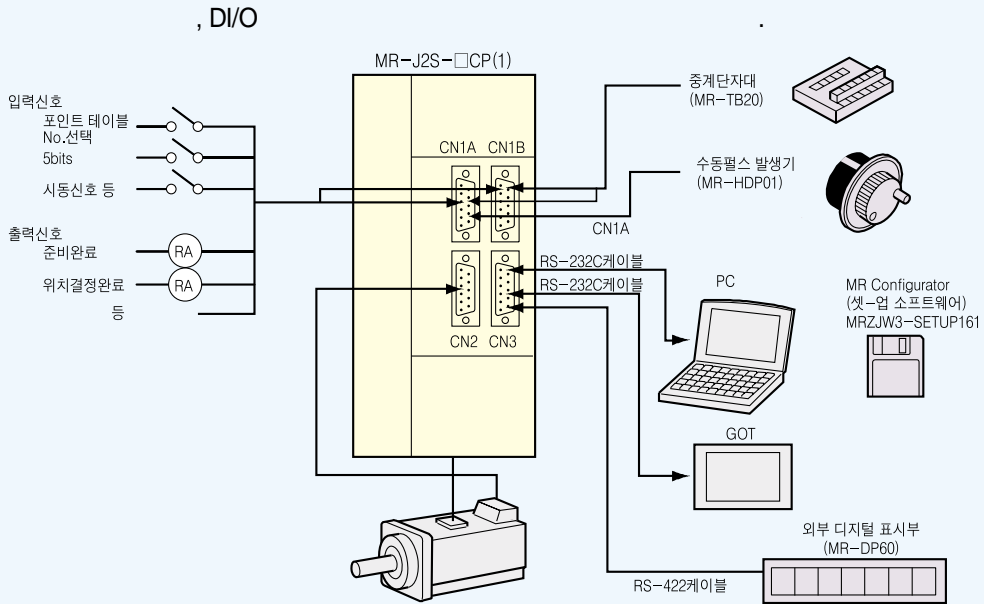


<RS-422 >

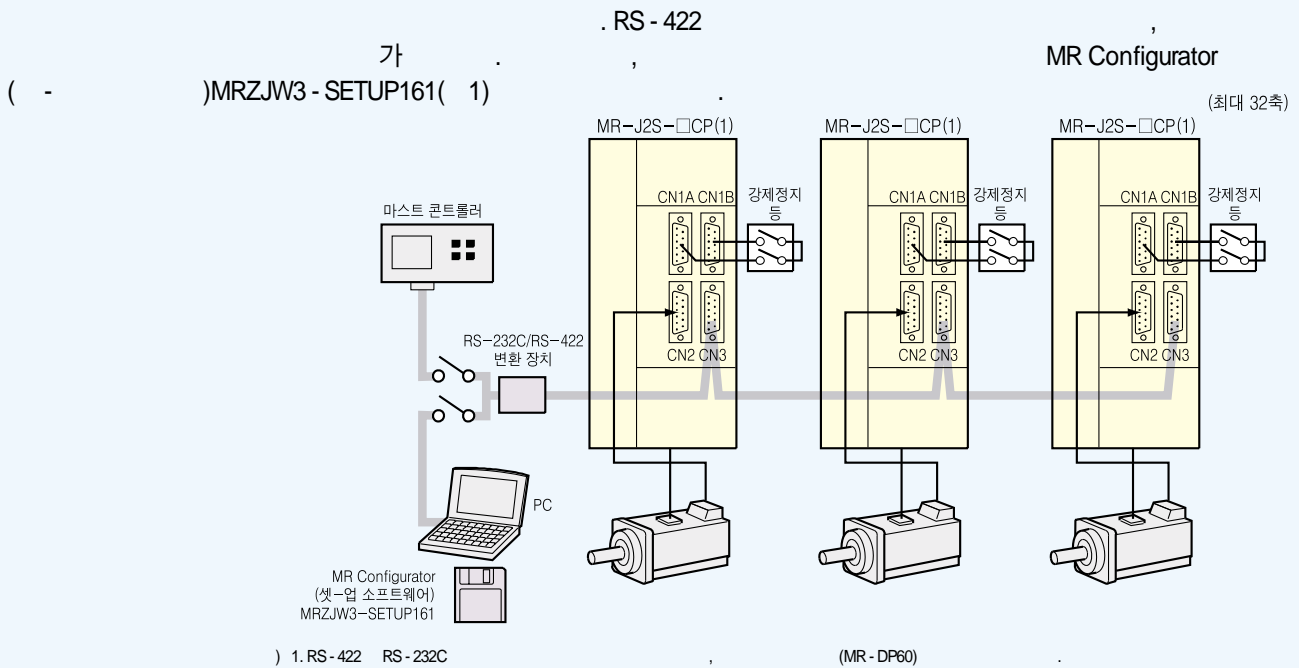


< RS-422(RS-232C) >

- 9600/19200/38400/57600 (bps)
- bit : 1bit bit : 8bit
- bit : 1bit bit : 1bit
- , 2



MR-J2S-CP

MR-J2S-CP

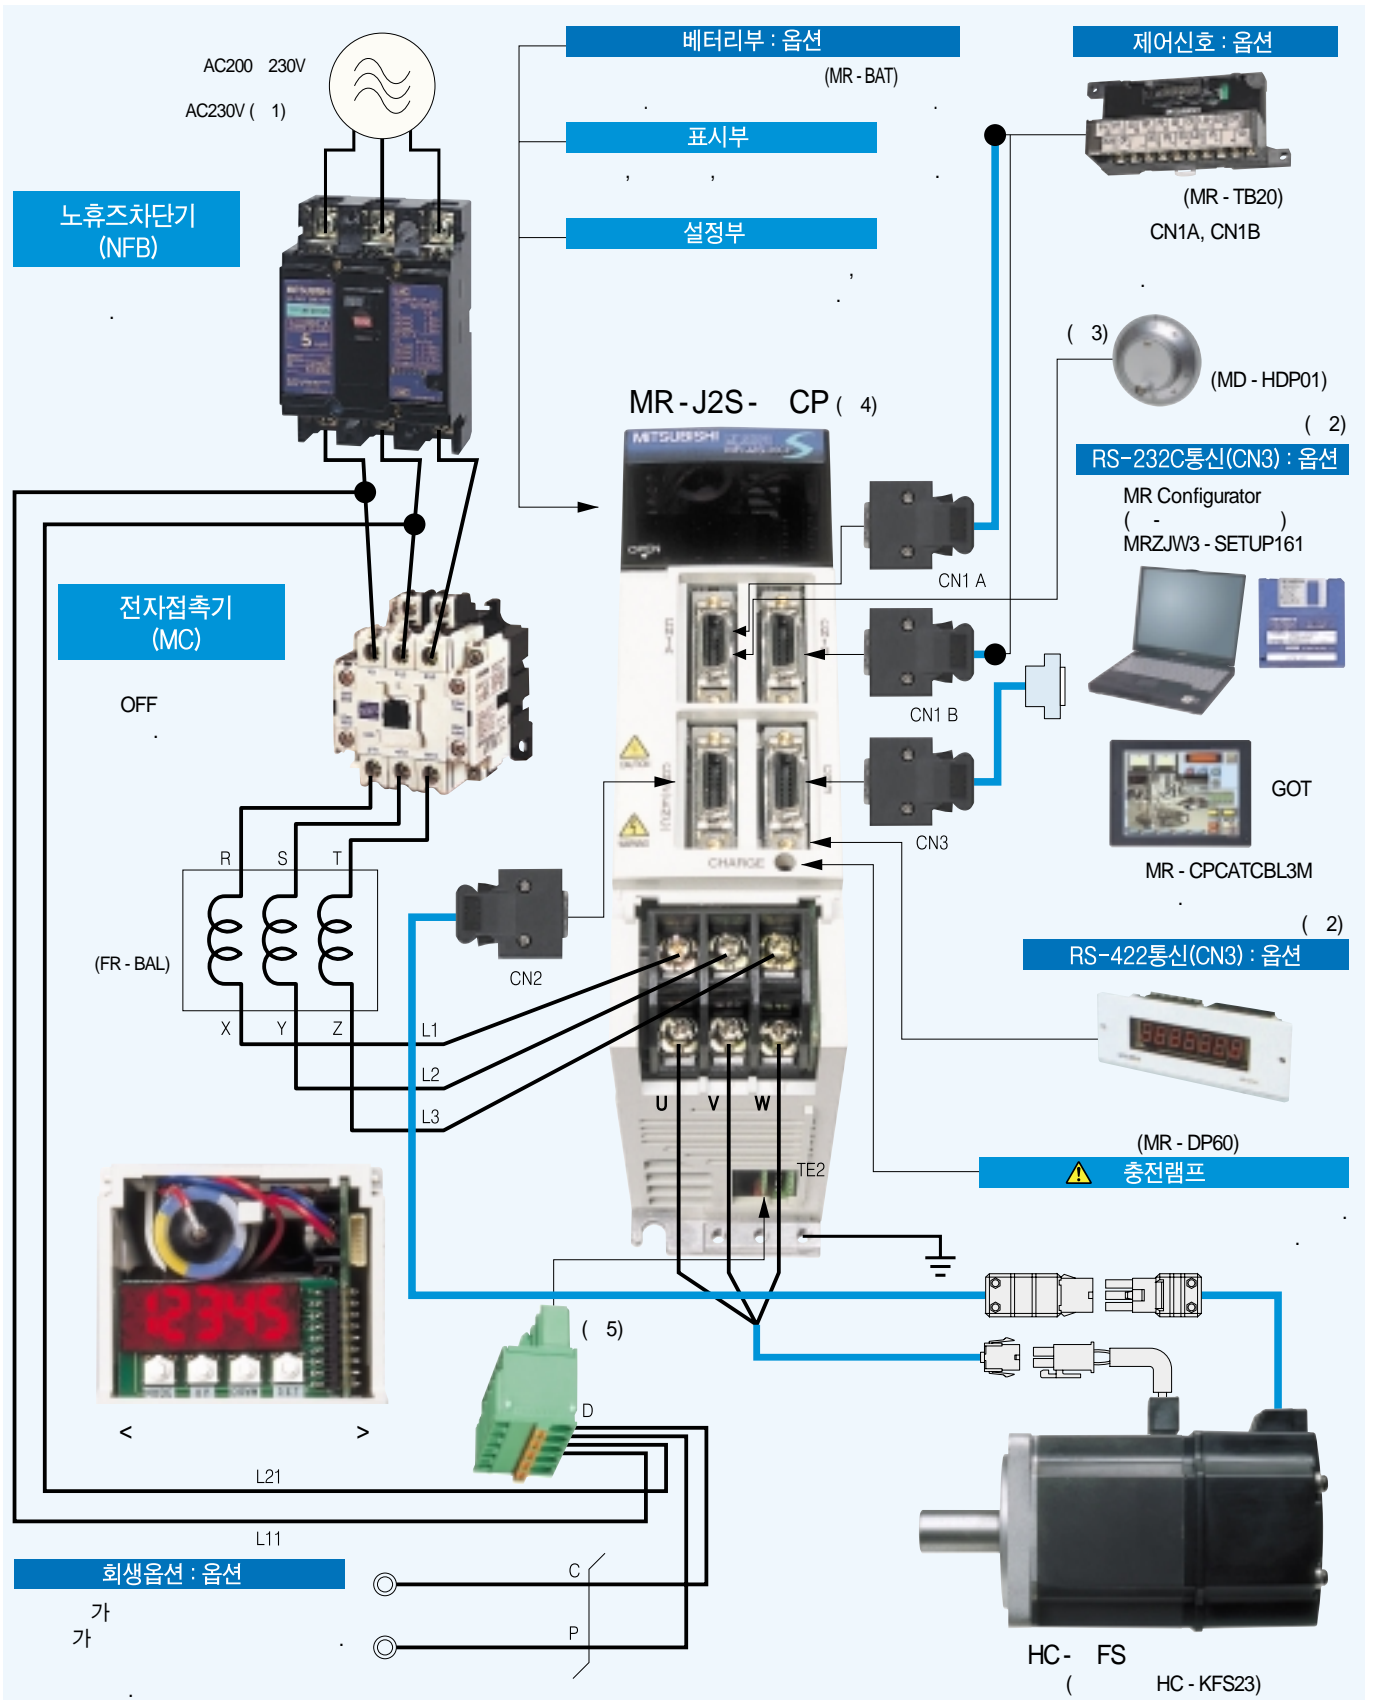

-) 1. AC230V L1 · L2 L3
 2. RS-232 RS-422 RS-422 가
 3. CN1 (MR - J2CN1)
 CN1 (MR - J2CN1)
 4. MR - J2S - 350CP MR - J2S - 500CP
 5. MR - J2S - 100CP (MR - J2S - CP - RT) 가

MR-J2S-CP ()

가 가

No.	No.	(31)
	.1	: ±1 (μm)~ ±999.999(mm)
	.가	.S 가 No.14
	RS - 422 (RS - 232C)	
	RS - 422 (RS - 232C)	.1 : ±1(μm)~ ±999.999(mm)
	RS - 422 (RS - 232C)	.가 RS - 422(RS - 232C)
	S 가	No.14


< > ... 가 () ((1)))

	- 999999~999999	$\times 10^{STM}\mu m$. STM
	0~	r/min	
가	0~20000	ms	가
	0~20000	ms	
	0~20000	ms	
	0~1	-	0: () 1:


No.	가					
1	1000	2000	200	200	0	1
2	2000	1600	100	100	0	0
31	- 1000	3000	100	100	0	0

No.1 1 「
1」 No.1 0 「
0」 가 .

●보조기능1



●보조기능0




(2) : (2)))

	0~999999	$\times 10^{STM}\mu m$. STM
	0~	r/min	
가	0~20000	ms	가
	0~20000	ms	
	0~20000	ms	
	0~1	-	0: () 1:


No.	가					
1	1000	2000	200	200	0	1
2	1000	1600	100	100	0	0
31	500	3000	100	100	0	0

No.1 1 「
1」 No.1 0 「
0」 가 .

●보조기능1 또는 3



●보조기능0 또는 2



(3) : (3)))

	- 999999~999999	$\times 10^{STM}\mu m$. STM . STM
	0~	r/min	
가	0~20000	ms	가
	0~20000	ms	
	0~20000	ms	
	0~3	-	0: () 1: () 2: () 3:

No.	가					
1	1000	2000	200	200	0	1
2	1000	1600	100	100	0	2
31	3000	3000	100	100	0	2

No.1 1 3 「
1」 3」
No.1 0 2 「
0」 2」 가 .

CC-Link

「MR-J2S-CP-S084」
가 .AC

「MR-J2S-T01」


MR-J2S-CP-S084

CC-Link

- 가
- CC-Link
- AC



MR-J2S-CP-S084

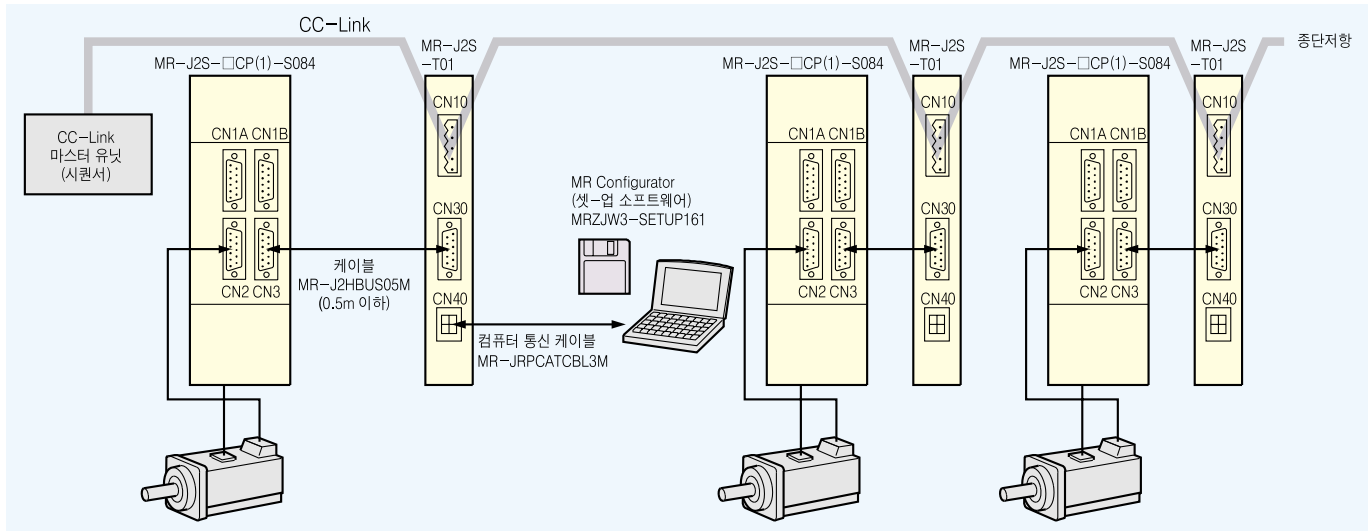

MR-J2S-CP-S084

MR-J2S-		10CP-S084	20CP-S084	40CP-S084	60CP-S084	70CP-S084 (U)	100CP-S084	200CP-S084	350CP-S084	500CP-S084	700CP-S084	10CP1-S084	20CP1-S084	40CP1-S084
(1)		AC200~230V/50, 60Hz					AC200~230V/50, 60Hz (2)					AC100~120V/50, 60Hz(2)		
		AC230V/50, 60Hz(2)					AC170~253V					AC85~127V		
		AC200~230V : AC170~253V					AC170~253V					AC85~127V		
		AC230V : AC207~253V												
		±5%												
		PWM												
		()												
		(IP00)				(IP00)				(IP00)				
		0~55 ()					-20~65 ()							
		90%RH (가)					90%RH (가)							
		()					가 . 가 . 가 . 가							
		1000m												
		5.9m/s ²												
	(kg)	0.7	0.7	1.1	1.1	1.7	1.7	2.0	2.0	4.9	7.2	0.7	0.7	1.1

1.
2.

MR-J2S-	10CP-S084 ~ 70CP-S084	100CP-S084 ~ 350CP-S084	500CP-S084, 700CP-S084	10CP1-S084 ~ 40CP1-S084
	P.29			
/	P.31	P.31	P.31	P.31
CN2	P.33	P.33, P.34		P.33
CN3/CN4/CON2	P.35			

CC-Link

CC-Link MR-J2S-CP-S084

CC-Link		MR-J2S-T01				
		DC5V				
C C · L i n k	C C - L i n k	Ver.1.10				
		MR-J2S- CP(1) - S084				
		10M/5M/2.5M/625K/156Kbps				
		NRZI				
		(EIA RS - 485)				
		CRC (X ¹⁶ +X ¹² +X ⁵ +1)				
		HDLC				
		1~64				
		3				
			156Kbps	625Kbps	2.5Mbps	5Mbps
		1200m	900m	400m	160m	100m
		0.2m				
		42 (1 /),(2 / 32), 가				
		CC-Link				
		0~55 (), : -20~65 ()				
		90%RH (가), : 90%RH (가)				
		(), 가 . 가 . 가				
		1000m				
		5.9m/s ²				
	(kg)	0.3				


CP

CC-Link

MR-J2S-T01

(1) :3

- No. :
No. 「MR-J2S-CP ()」
가
No. :
CC-Link No. ,가
- :
CC-Link
No.1 가

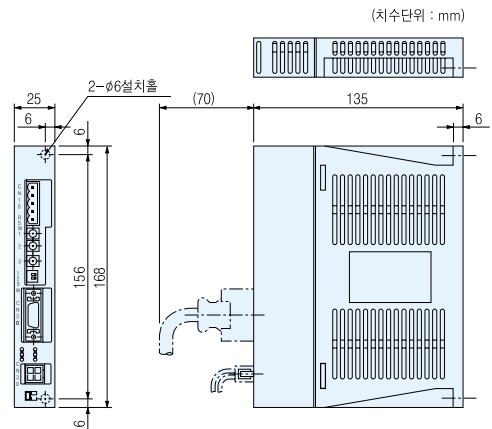

(2)


- 「 (ON) 」, 「
「MR-J2S-CP()」

MR-J2S-CL


- 16 가
- 32 가
- 120 가
- MR Configurator()MRZJW3-SETUP161
- () 가

MR-J2S-CL

<DI/O >

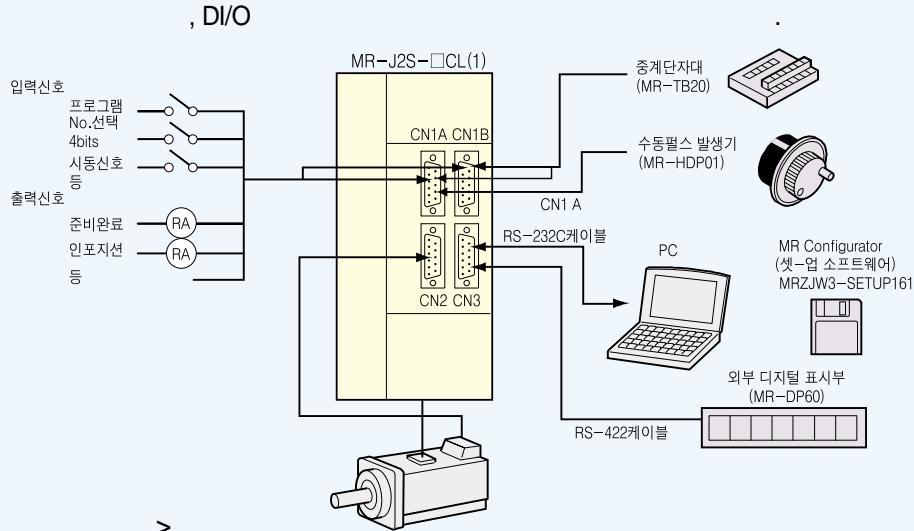


<RS-422 >

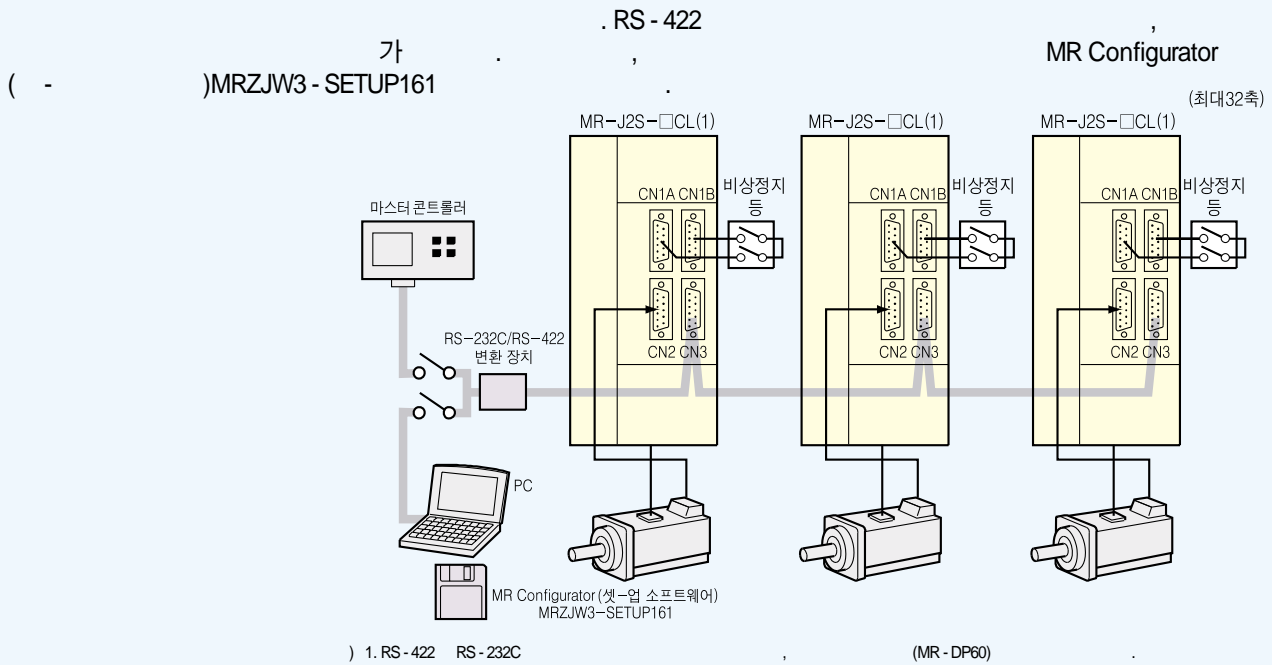


< RS-422 (RS-232C) >

- 9600/19200/38400/57600 (bps)
- bit : 1bit bit : 8bit
- bit : 1bit bit : 1bit
- 2



MR - J2S - CL

MR - J2S - CL

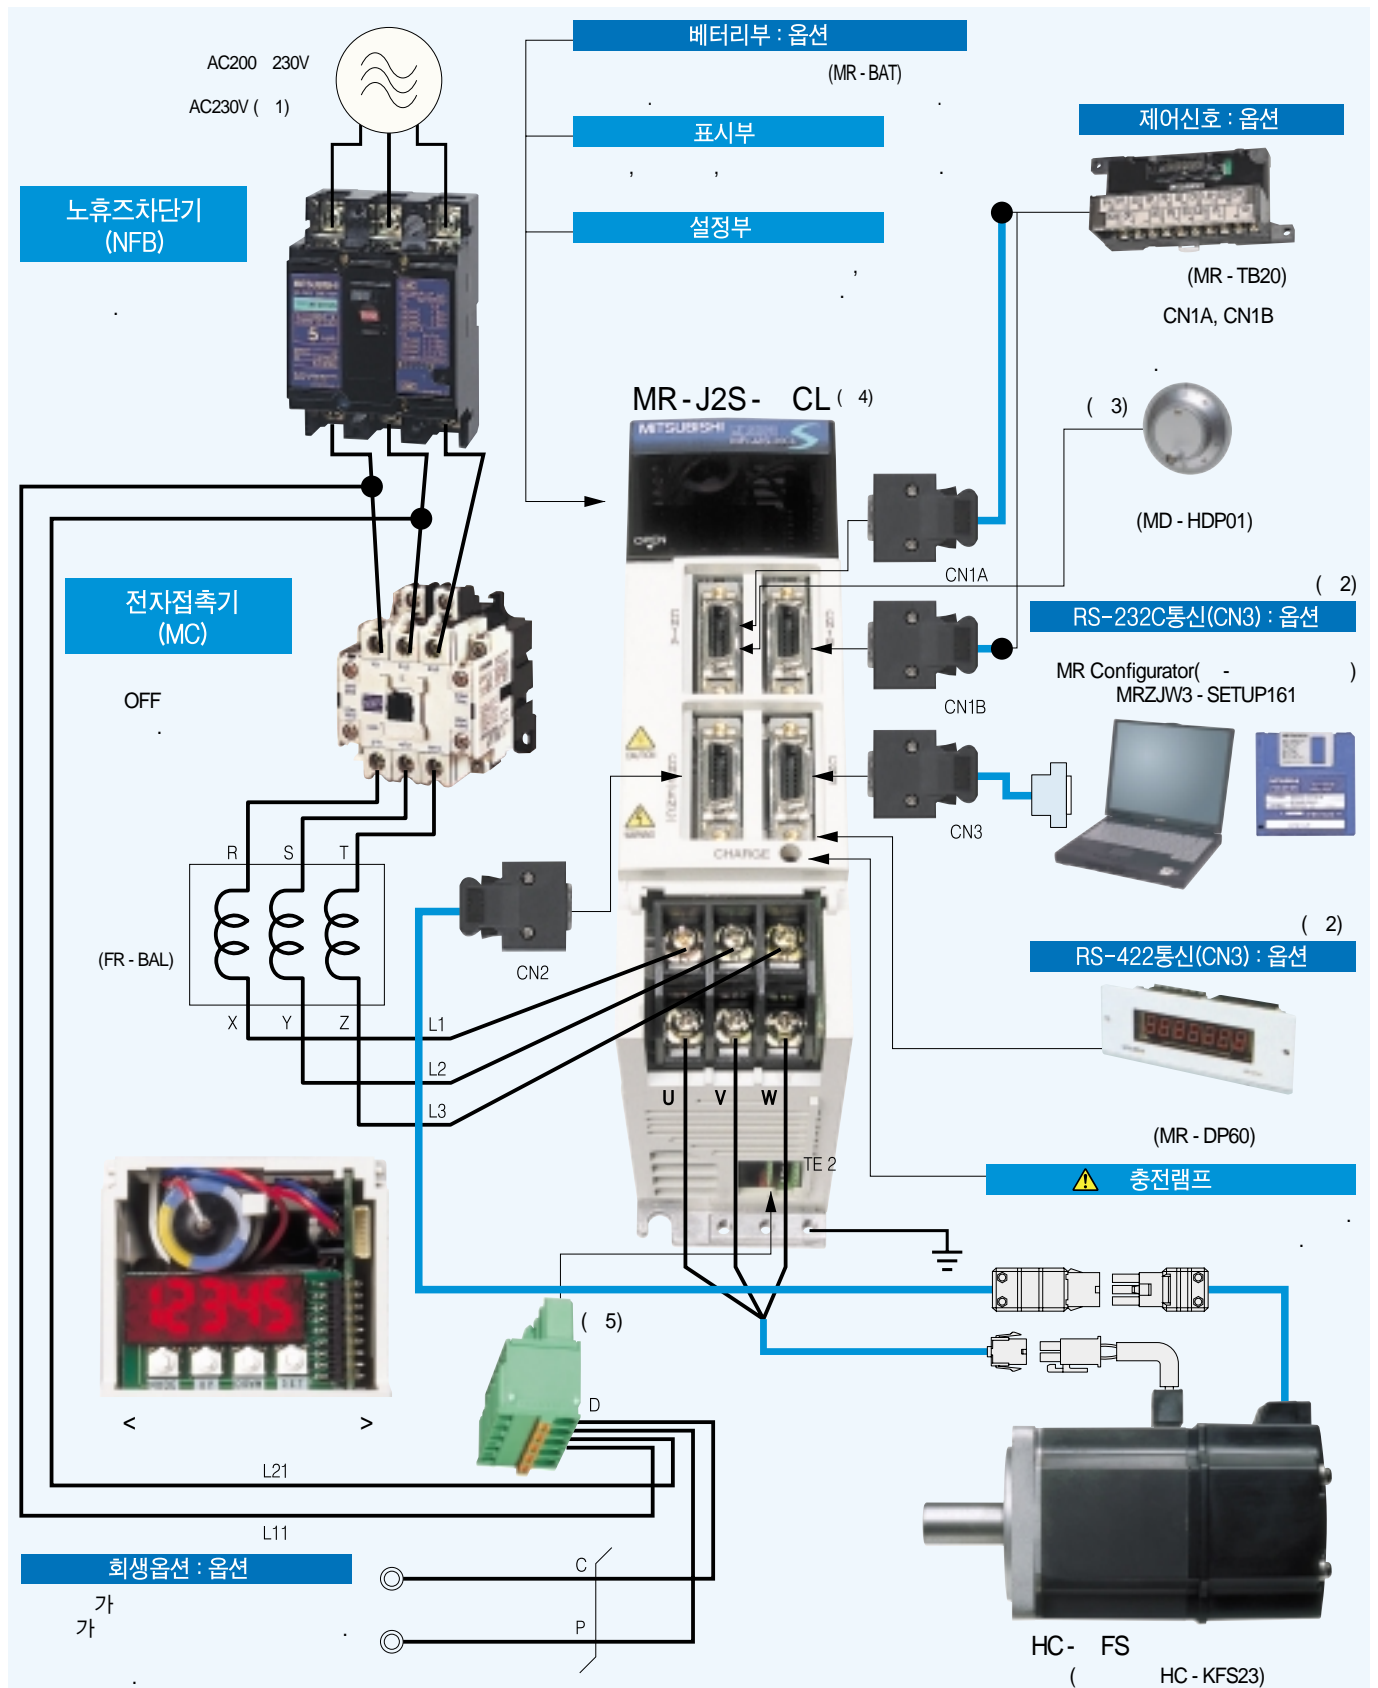

- 1. AC230V
- 2. RS - 232 RS - 422 RS - 422
- 3. CN1 (MR - J2CN1) CN1 (MR - J2CN1)
- 4. MR - J2S - 350CL MR - J2S - 500CL (MR - J2S - CL - RT)
- 5. MR - J2S - 100CL

,가


					(7)	
SPN (1)		SPN ()	0~	r/min		
STA(2)	가	STA ()	0~20000	ms		가
STB(2)		STB ()	0~20000	ms		
STC(2)	가	STC ()	0~20000	ms		가
STD(2)	S 가	STD ()	0~100	ms		S 가
MOV		MOV ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$		
MOVA		MOVA ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$		[MOVI]
MOVI		MOVI ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$		
MOVIA		MOVIA ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$		[MOVI]
SYNC (3)	ON	SYNC ()	1~3	-	-	SYNC (SOUT) 3(P13) ON 1(P11) ~
OUTON (3,4)	ON	OUTON ()	1~3	-	-	1(OUT1)~ No.74~No.76 ON 3(OUT3) ON OFF
OUTOF (3)	OFF	OUTOF()	1~3	-	-	[OUTON] ON 1(OUT1) ~ 3(OUT3) OFF
TRIP (3)		TRIP ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$	-	
TRIPI (3)		TRIPI ()	-999999 ~999999	$\times 10^{STM} \mu m^{(6)}$	-	[MOVI, MOVIA] [MOVI, MOVIA] [TRIPI] [MOVI, MOVIA]
ITP (3,5)		ITP ()	0 ~999999	$\times 10^{STM} \mu m^{(6)}$	-	[SYNC]
COUNT (3)		COUNT ()	-999999 ~999999	pulse	-	[COUNT] [COUNT(0)]
FOR NEXT		FOR () NEXT	0, 1~10000		-	[FOR()] [NEXT] [FOR(0)]
LPOS (3)		LPOS	-	-	-	(LPS)
TIM		TIM ()	1~2000	$\times 10ms$		
ZRT		ZRT	-	-	-	
TIMES		TIMES ()	0, 1~10000			[TIMES()] [TIMES(0)]
STOP		STOP	-	-	-	

1. [SPN] [MOV, MOVA, MOVI, MOVIA]
2. [STA, STB, STC, STD] [MOV, MOVI]
3. [SYNC, OUTON, OUTOF, TRIP, TRIPI, ITP, COUNT, LPOS]
4. No.74~No.76 ON
5. 가 [ITP]
6. STM
7. (R1~R4, D1~D4)
8. MR - J2S - CL

< 1 >

,가 ,

SPN(1000)	1000(r/min)	} (1)
STA(200)	가 200(ms)	
STB(300)	300(ms)	
MOV(1000)	1000(× 10 ⁵ TMμm)	
TIM(10)	100(ms)	
MOV(2500)	2500(× 10 ⁵ TMμm)	
STOP		

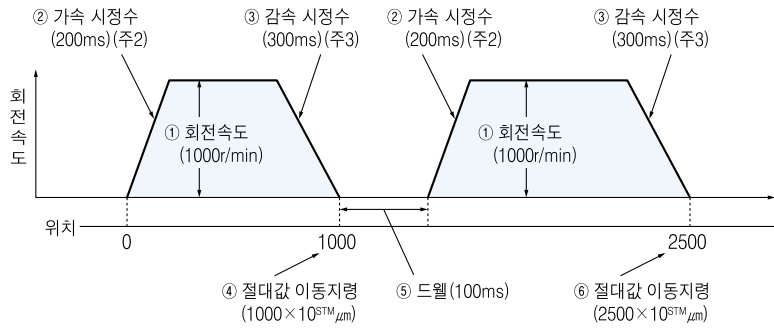


1. . .
- 2.
- 3.

< 2 >

[FOR()] [NEXT]


SPN(1000)	1000(r/min)
STC(20)	가 20(ms)
MOV(1000)	1000(× 10 ⁵ TMμm)
TIM(10)	100(ms)
FOR(3)	3()
MOVI(100)	100(× 10 ⁵ TMμm)
TIM(10)	100(ms)
NEXT	
STOP	

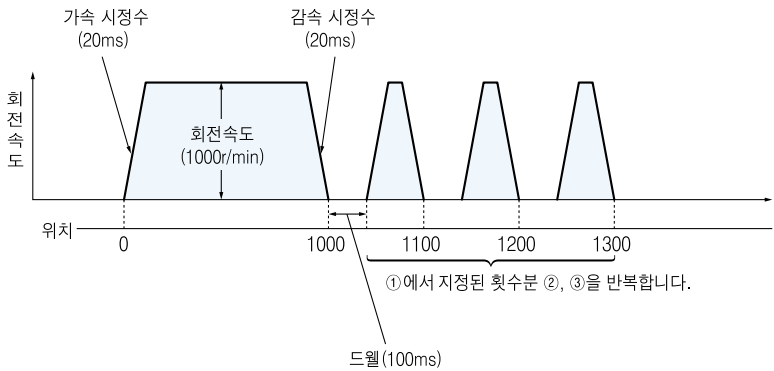

MR-J2S- A(1)/MR-J2S- A(4) :

A


QD75D

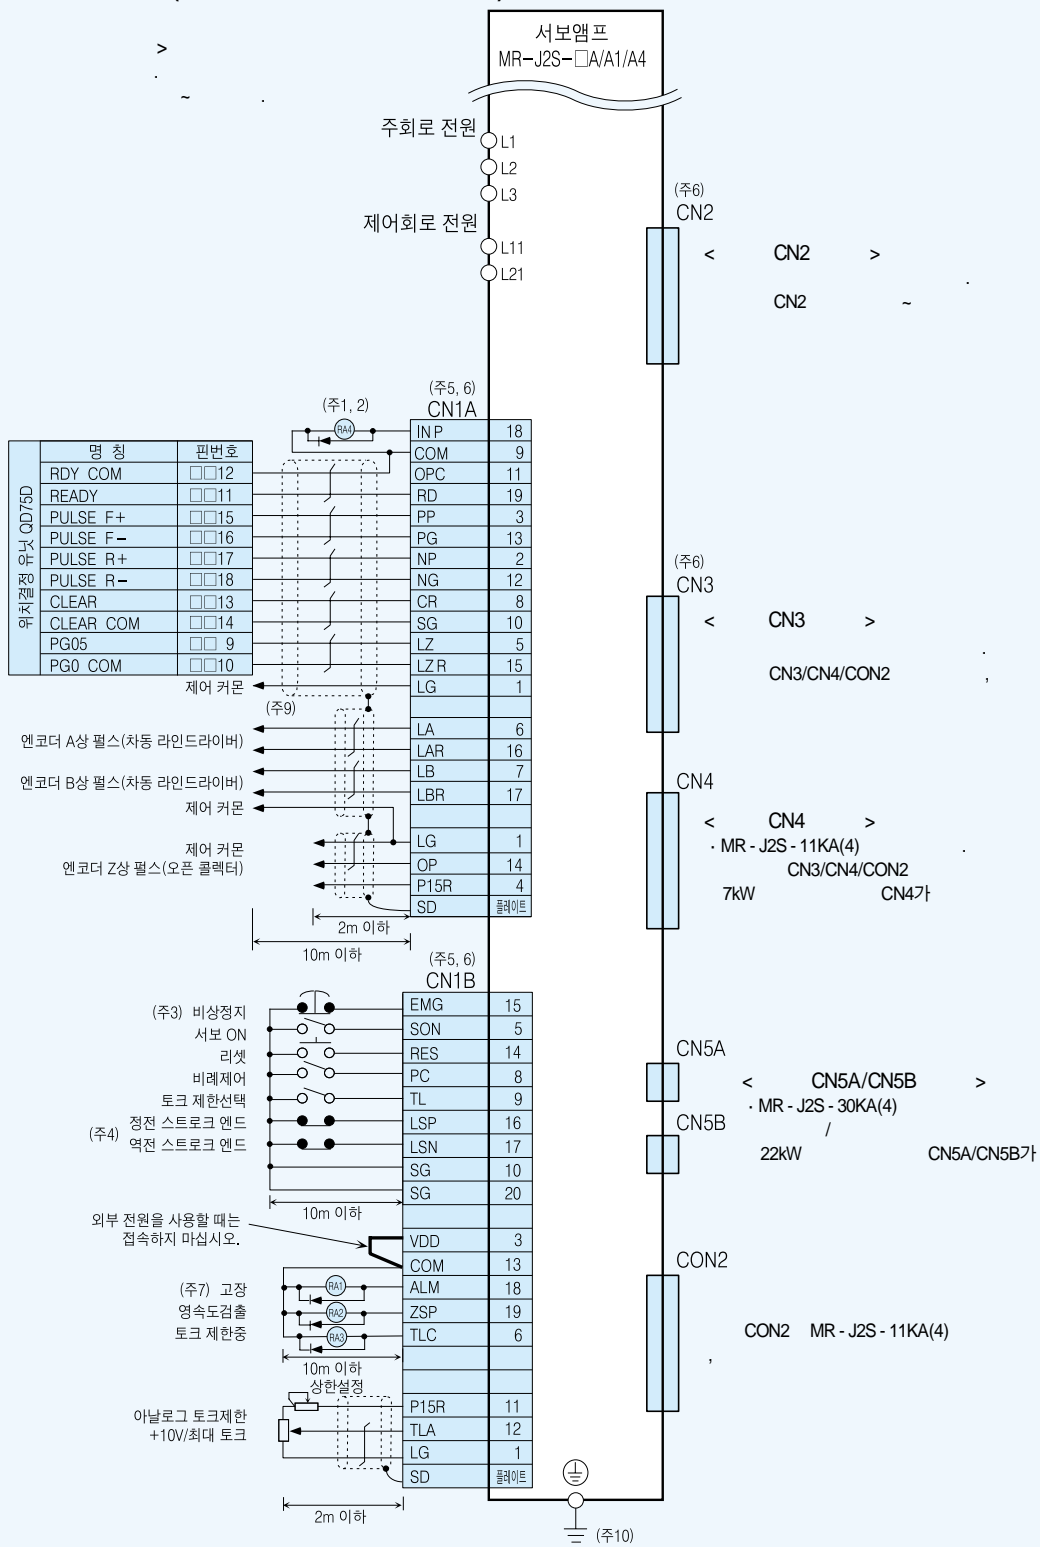

1. 가 가 가 가 가
2. 80mA 가 가 .80mA 가
3. EMG (b) 가
4. (LSP, LSN) .(b) 가
5. 가
6. CN1A, CN1B, CN2 CN3 가
7. (ALM) ON 가
8. () 가
9. QD75D (PE) 가 LG-
10. (PE) 가


CL

MR-J2S- A(1)/MR-J2S- A(4) :

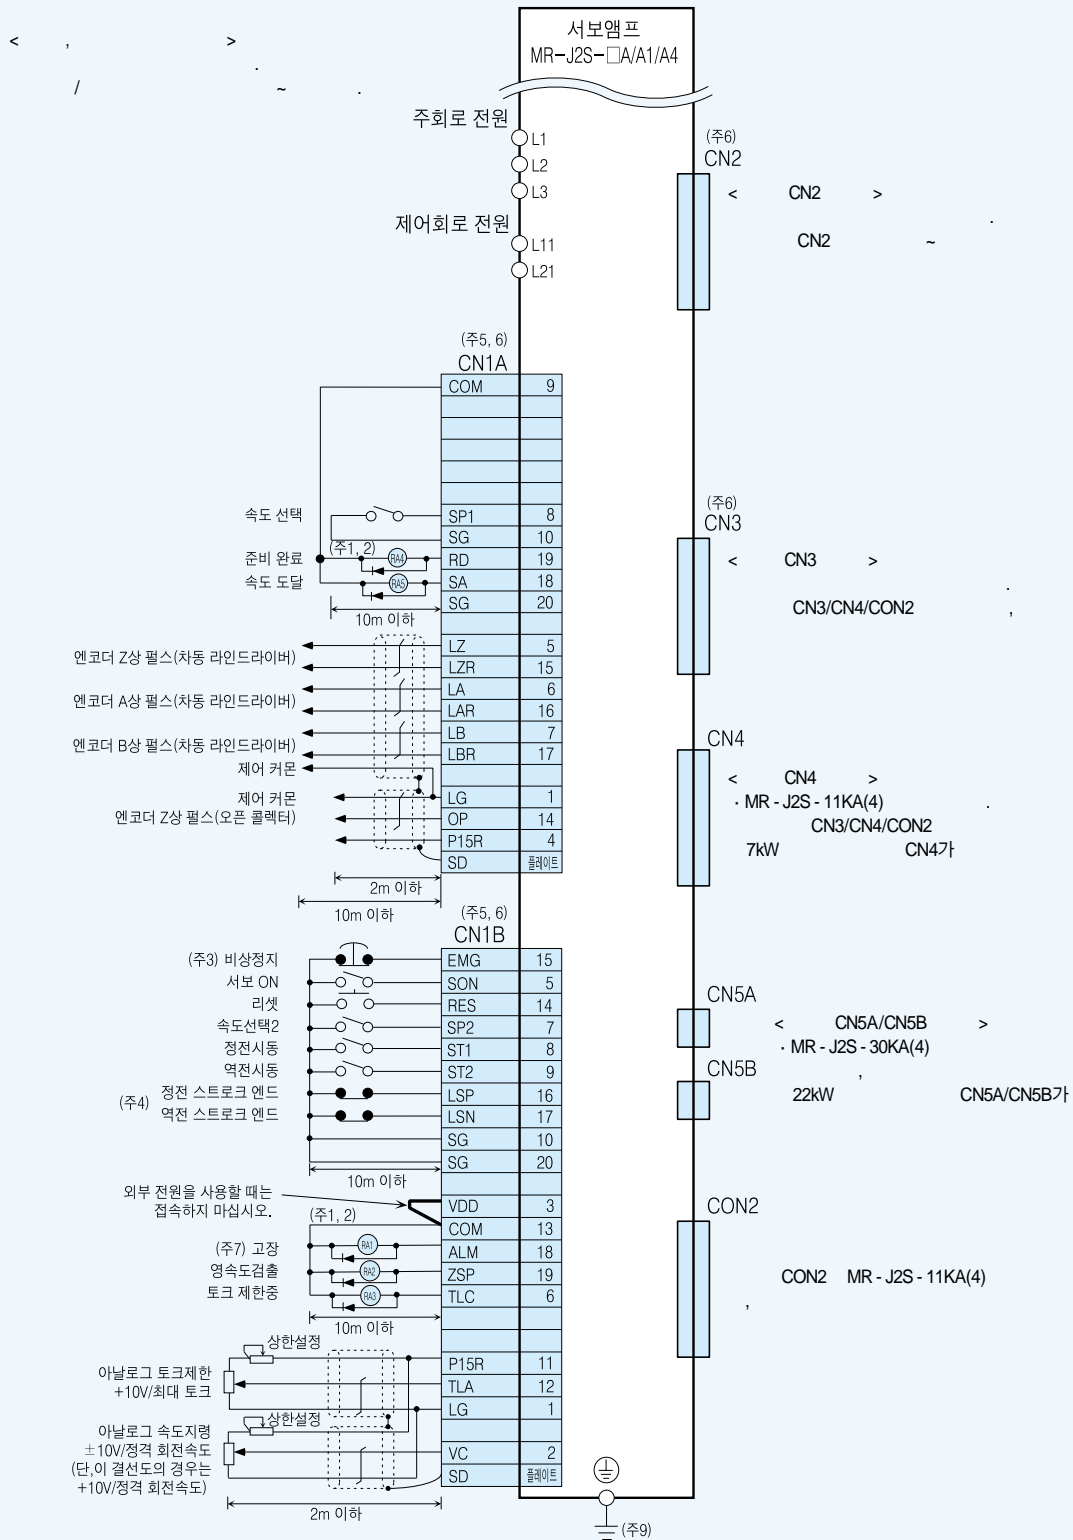


1. 가 가 가 가
2. 80mA 가 .80mA 가
3. EMG .(b) 가
4. (LSP,LSN) .(b) 가
5. 가
6. CN1A, CN1B, CN2 CN3
7. (ALM) ON 가
8. 가 (PE) 가
9. 가 (PE) 가

MR-J2S- A(1)/MR-J2S- A(4) :

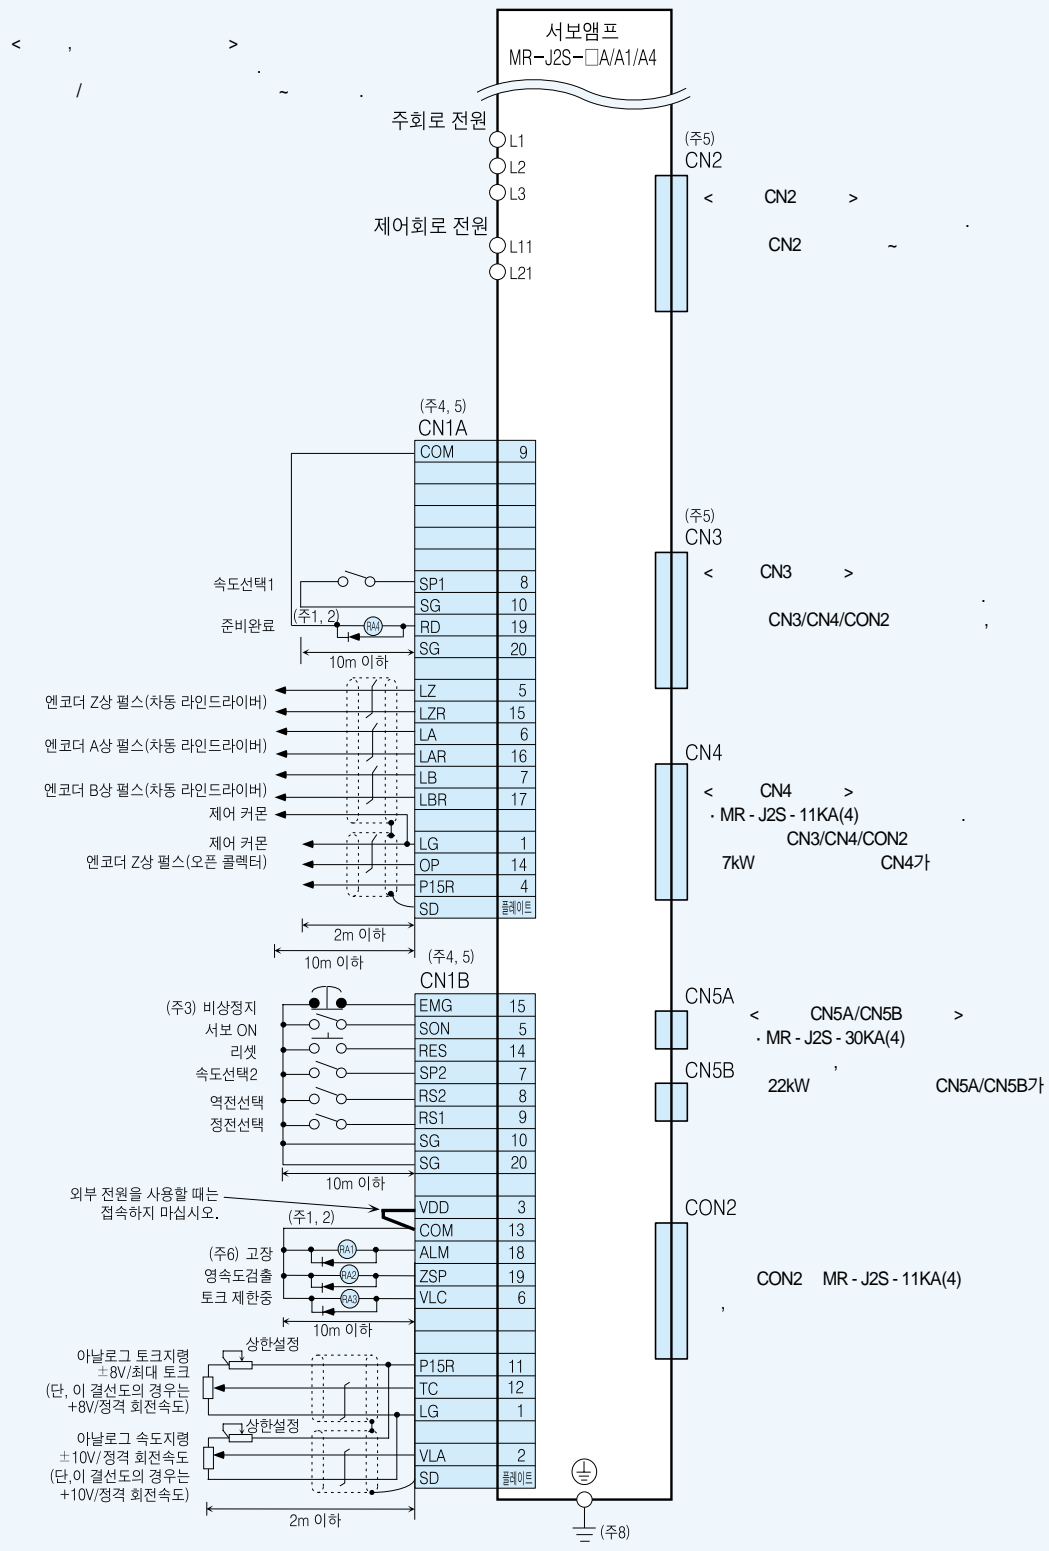

1. 가 가 가 가
2. 80mA 가 .80mA
3. EMG (b)
- 4.
5. CN1A, CN1B, CN2 CN3
6. (ALM) ON ()
7. (PE) (PE)
- 8.


MR-J2S- B(1)/MR-J2S- B(4)

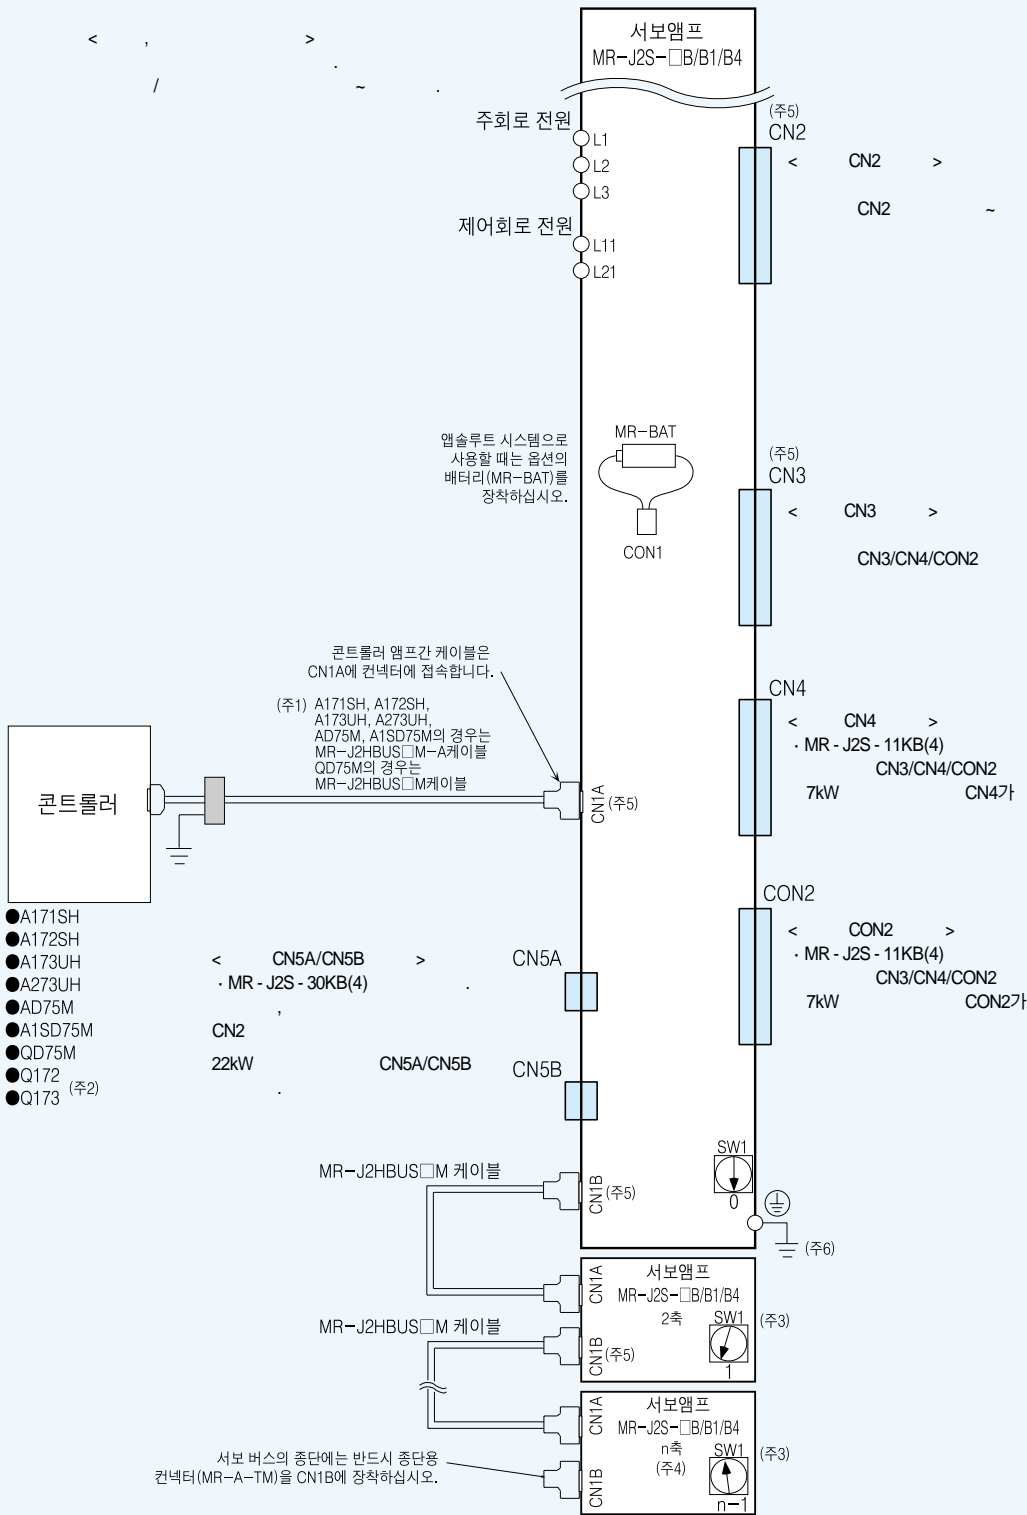

1. MR-J2HBUS M-A, MR-J2HBUS M 30m
2. Q172/Q173- Q (L) (-03010) a
3. 2
4. 8 (n=1~8) MR-H BN
5. CN1A, CN1B, CN2 CN3
6. (PE) (PE)


(3-4)

MR-J2S- CP(1)

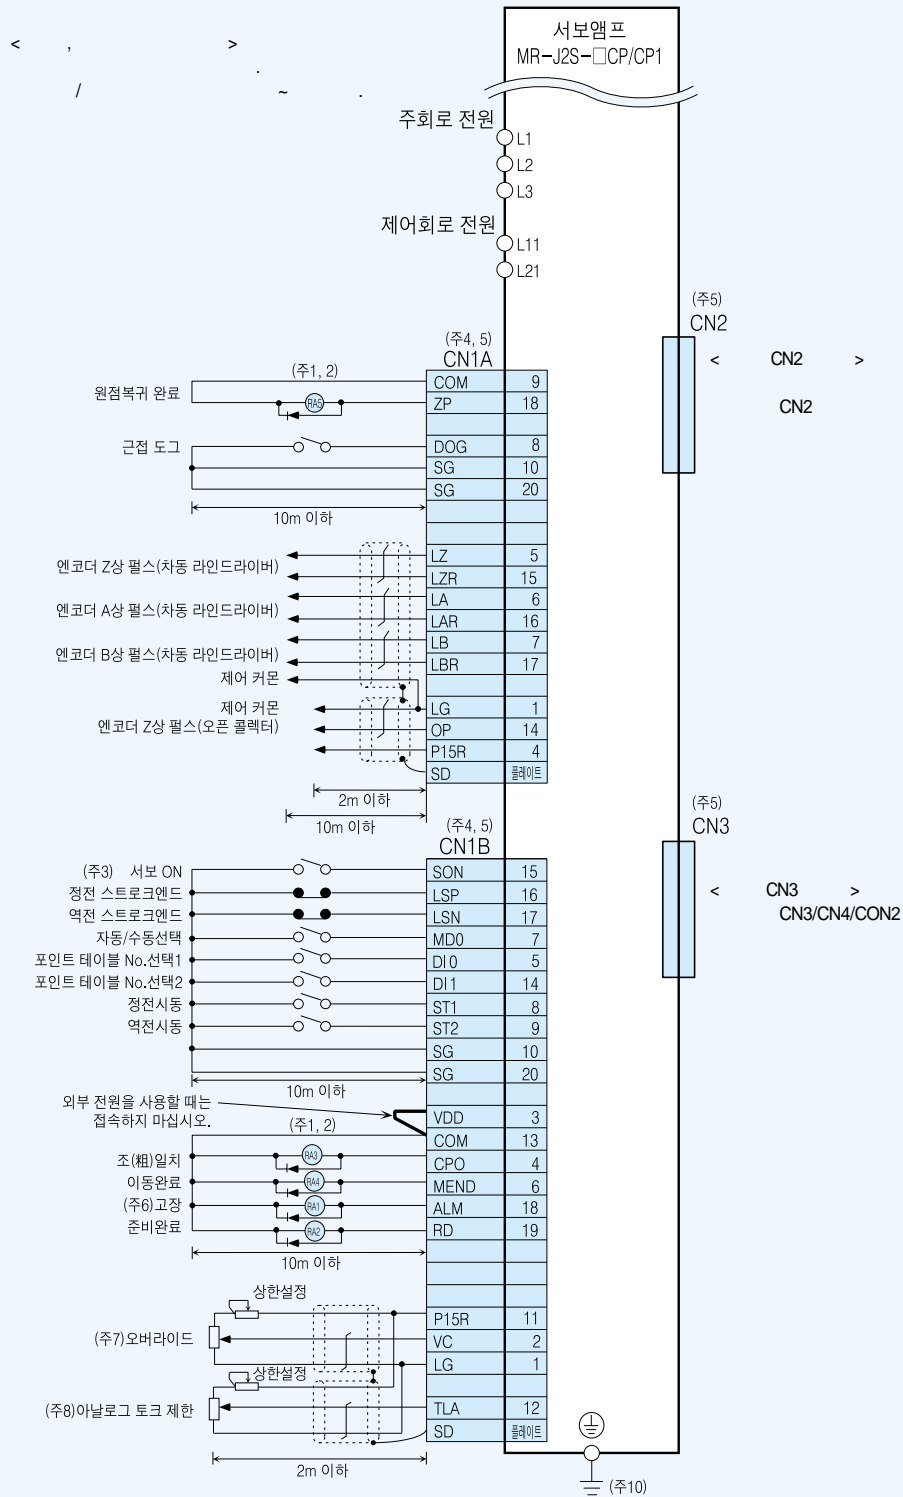


1. 가 가 가
2. 80mA 가 80mA 가
3. (LSP, LSN) (b)
- 4.
5. CN1A, CN1B, CN2 CN3
6. (ALM) ON
7. (VC) (OVR) 가
8. (TLA) (TL) 가
9. () ()
10. (PE) (PE)

MR-J2S- CP(1)-S084

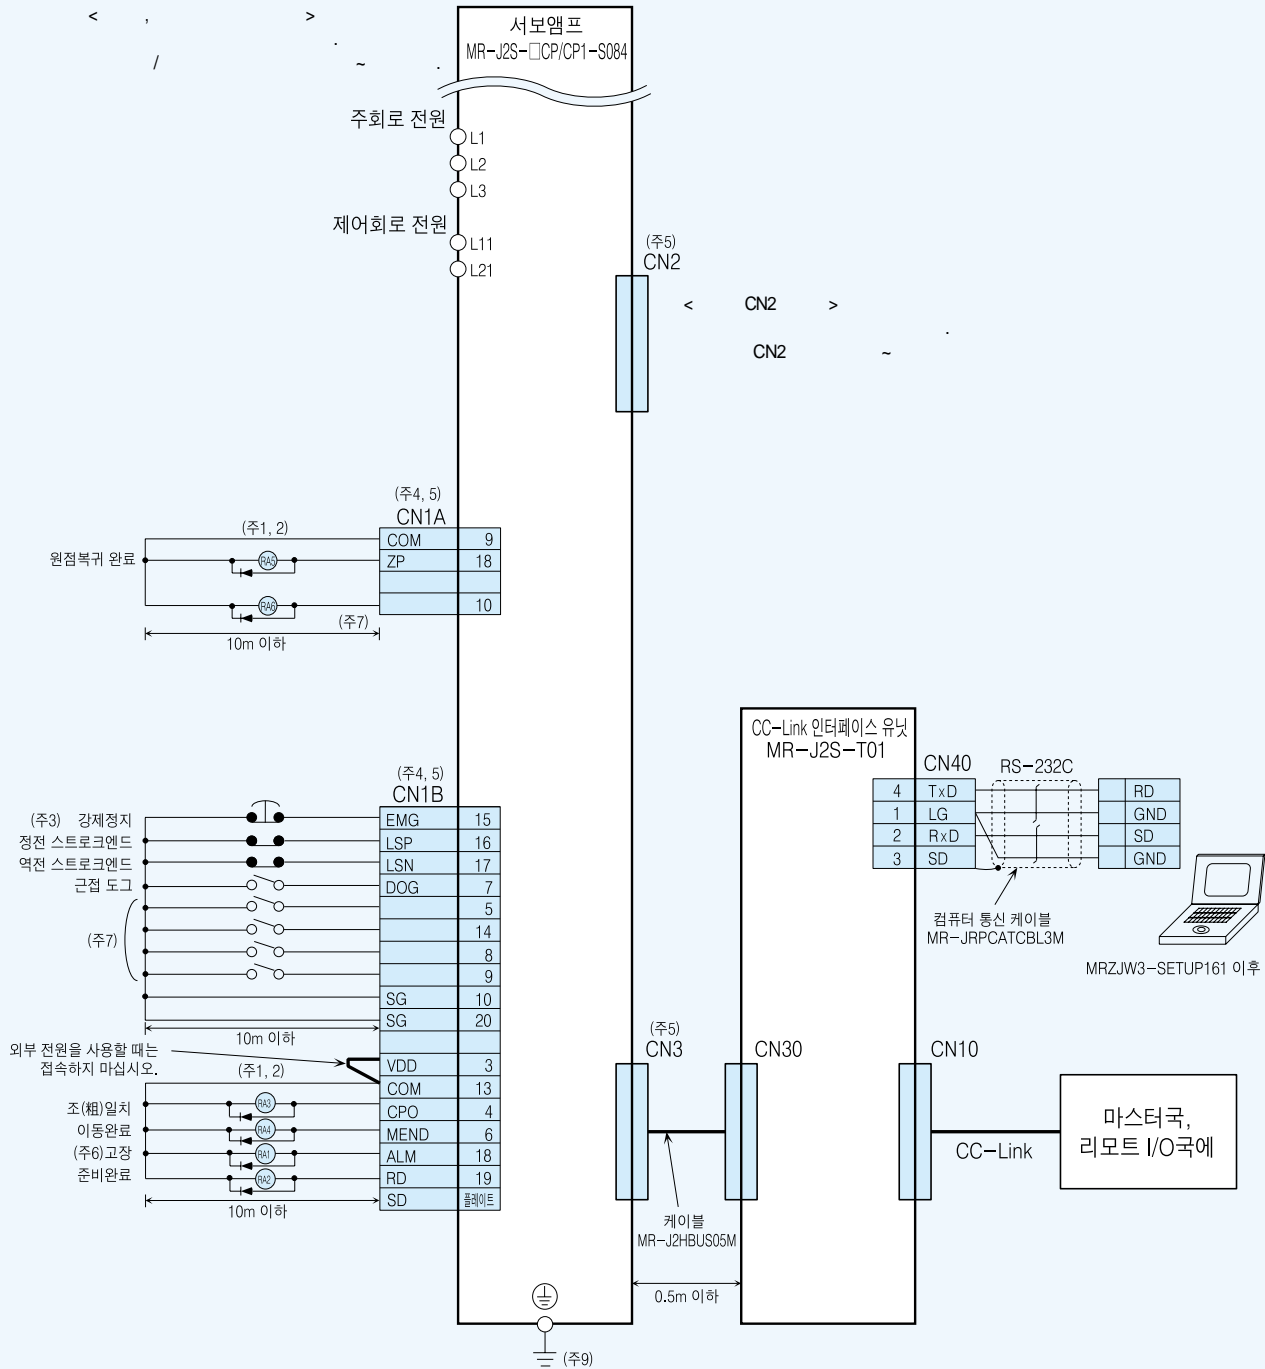


1. 가 가 가 가
2. 80mA 가 가 80mA 가
3. (LSP, LSN) . (b)
4. 가
5. CN1A, CN1B, CN2 CN3
6. (ALM) ON
7. 가
8. ()
9. (PE) (PE)

MR-J2S- CL(1)

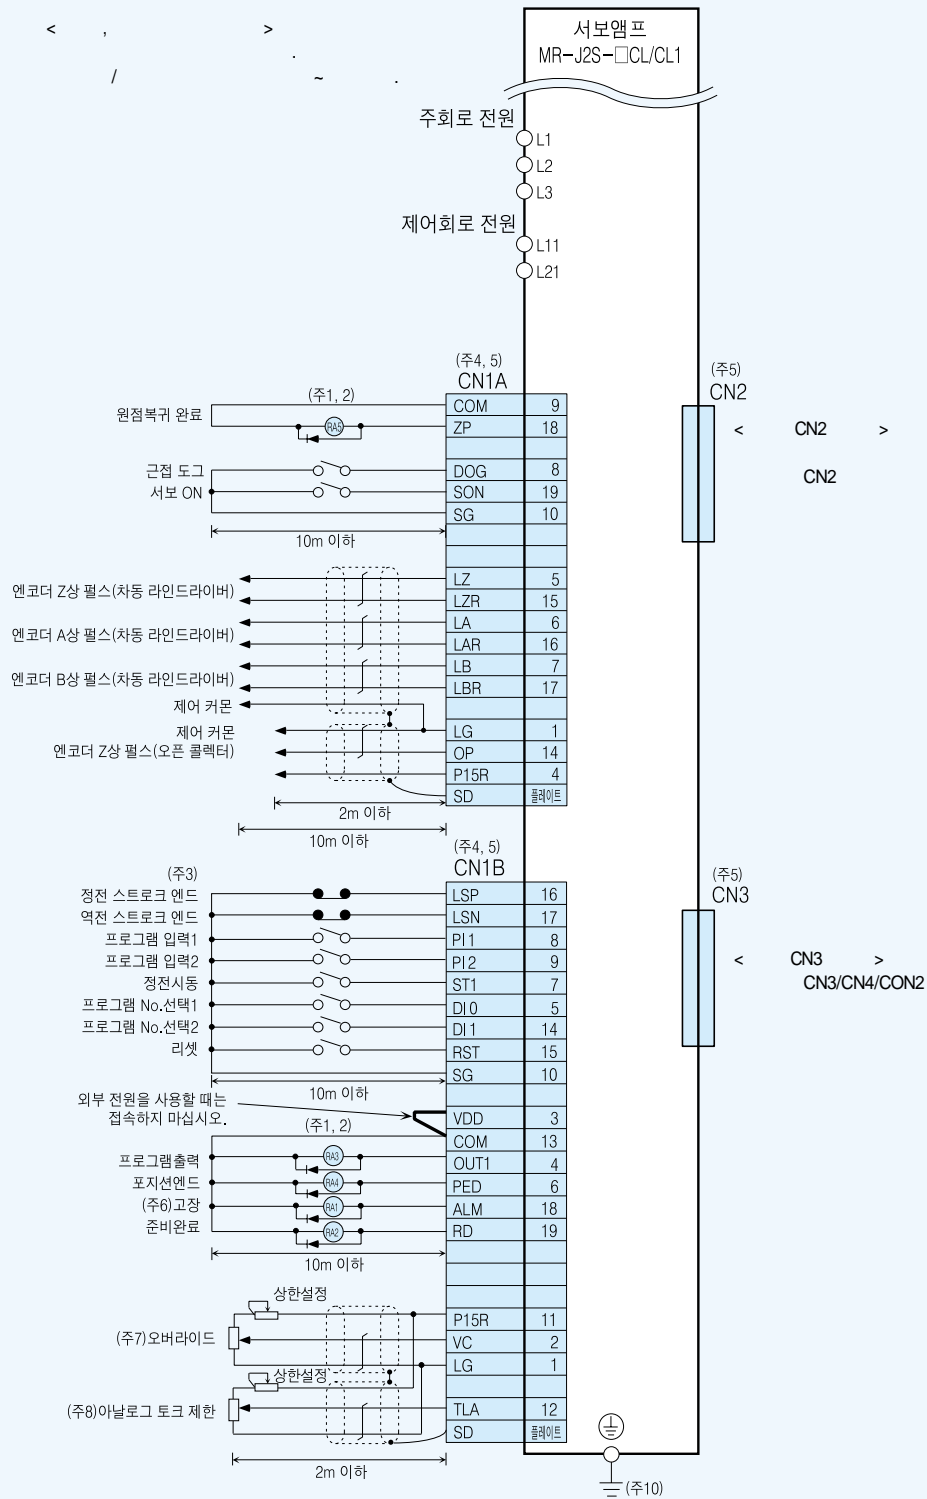


1. 가 가 가
2. 가 가 가
3. (LSP, LSN) (b)
4. 가
5. CN1A, CN1B, CN2 CN3
6. (ALM) ON
7. (VC) (OVR) 가
8. (TLA) (TL) 가
9. 가
10. (PE) (PE)


100V

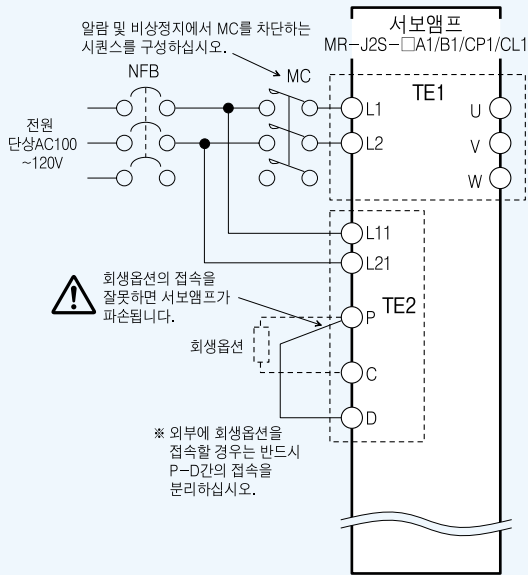


230V

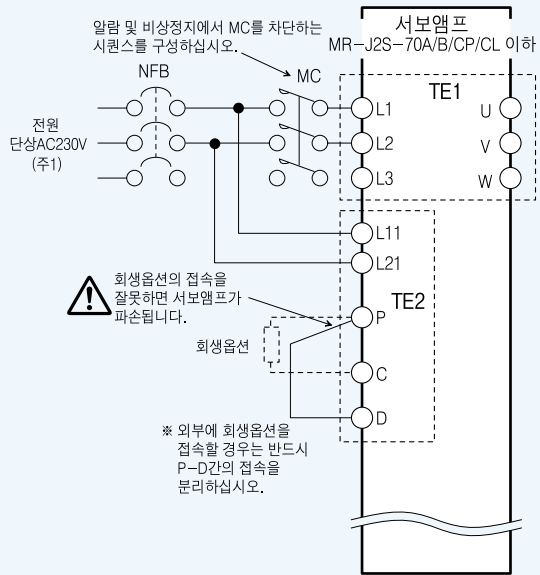

200V 3.5kW

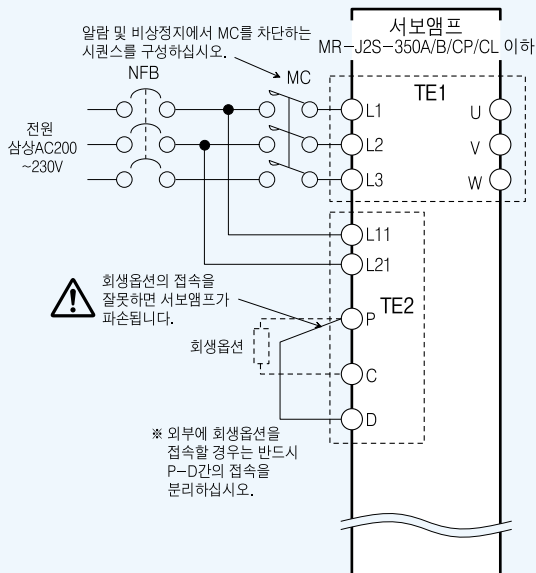


200V 5, 7kW

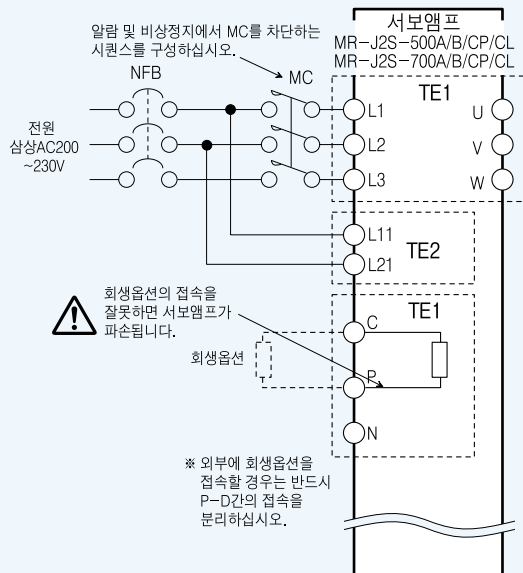


) 1. AC230V L1, L2 , L3

AC230V MR-J2S-70A/B/CP/CL


200V 400V 11~22 kW

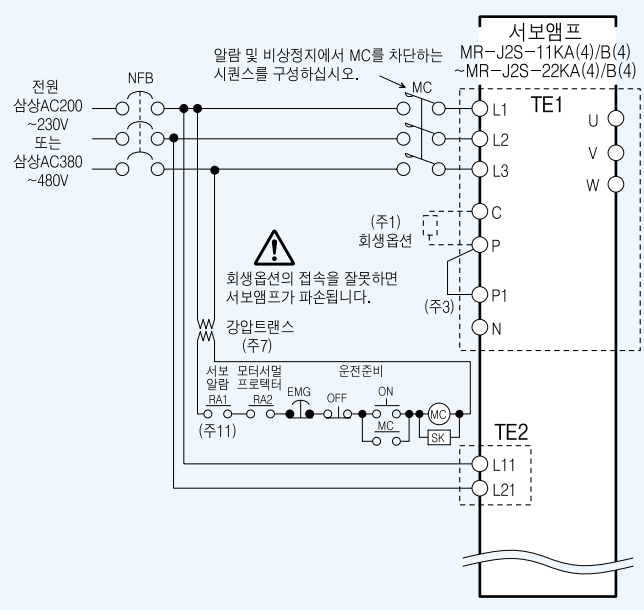


200V 400V 30 kW

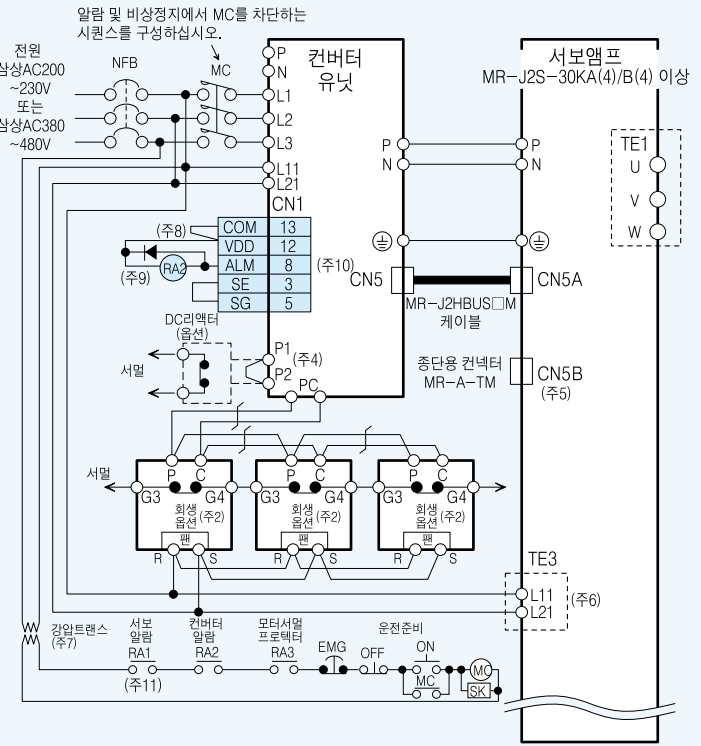

400V 2kW

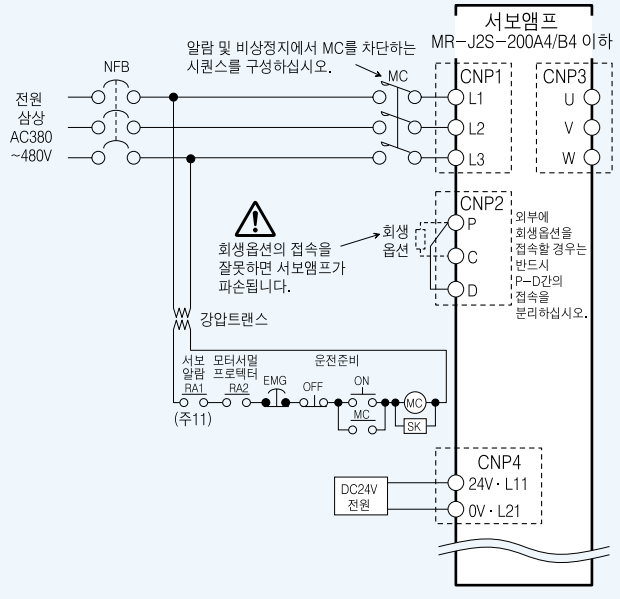


400V 3.5~7kW

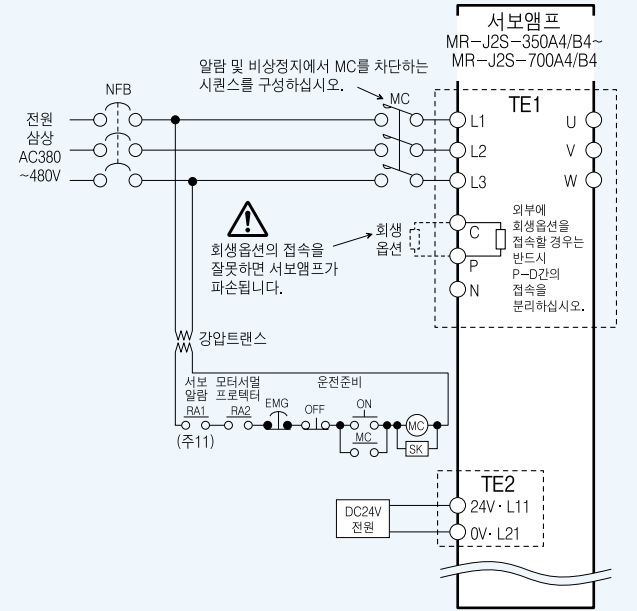

- 1. 11kW
- 2. MR-RB137(200V), MR-RB138-4(400V)
- 3. DC P-P1
- 4. DC P1-P2
- 5. (MR-A-TM) CN5B
- 6. L11, L21 (相) L1, L2
- 7. 400V 200V 가 가 가 가
- 8. 가 가 가 가
- 9. 80mA 가 80mA
- 10. (ALM) ON
- 11. MC MR-J2S-A, CP, CL


CN2

HC-KFS, MFS, UFS3000r/min

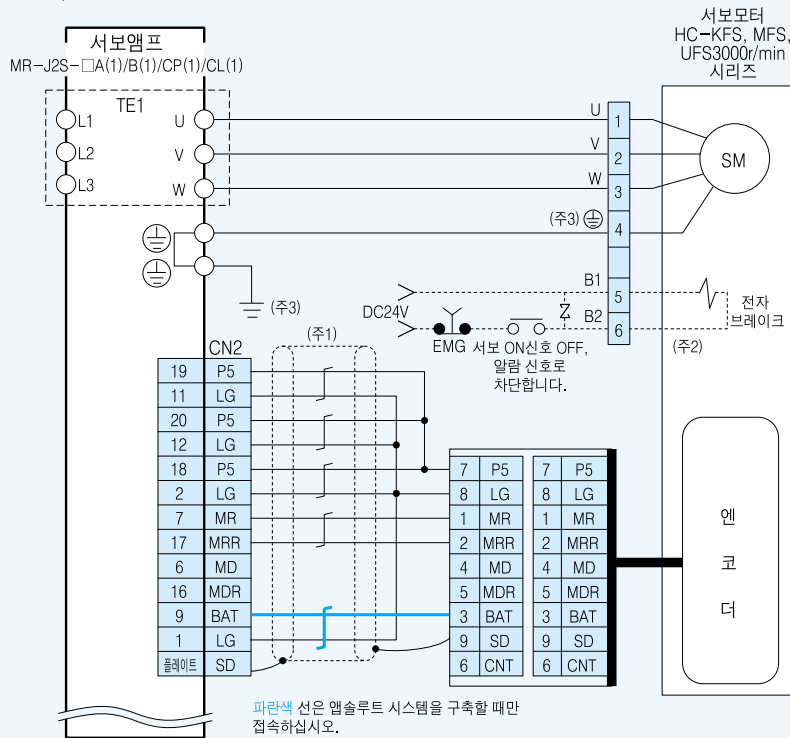

HC-SFS, LFS, RFS, UFS2000r/min


HA-LFS502, 702

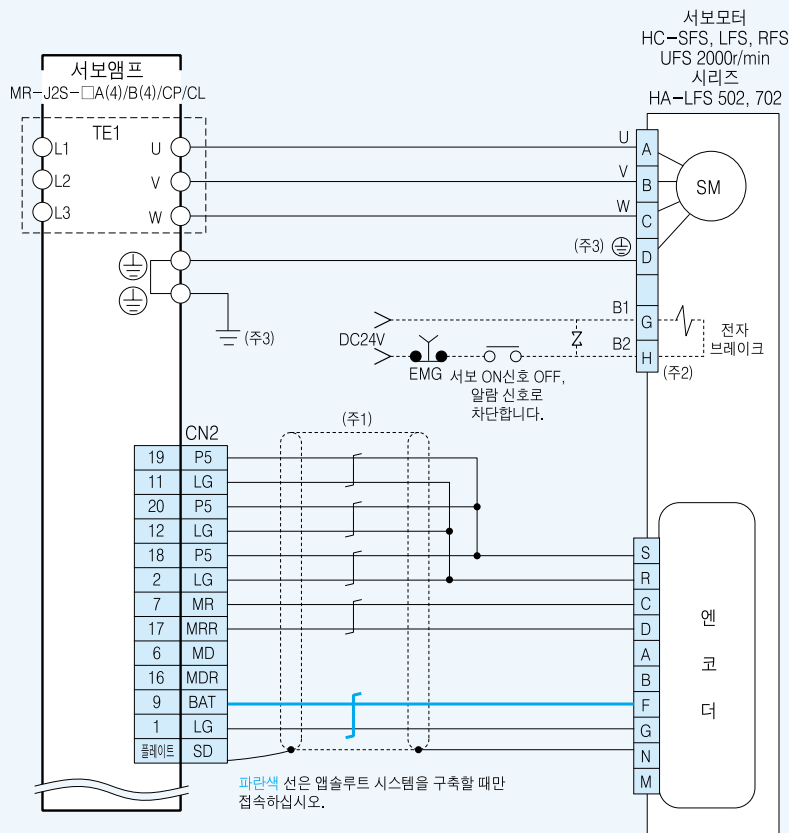

1. MR-J2S
2. HC-SFS121B-301B, 202(4)B-702(4)B, 203B, 353B, HC-LFS202B, 302B, HC-UFS202B-502B
3. (PE)

가


HA-LFS601(4), 701M(4), 801(4) HA-LFS 11kW

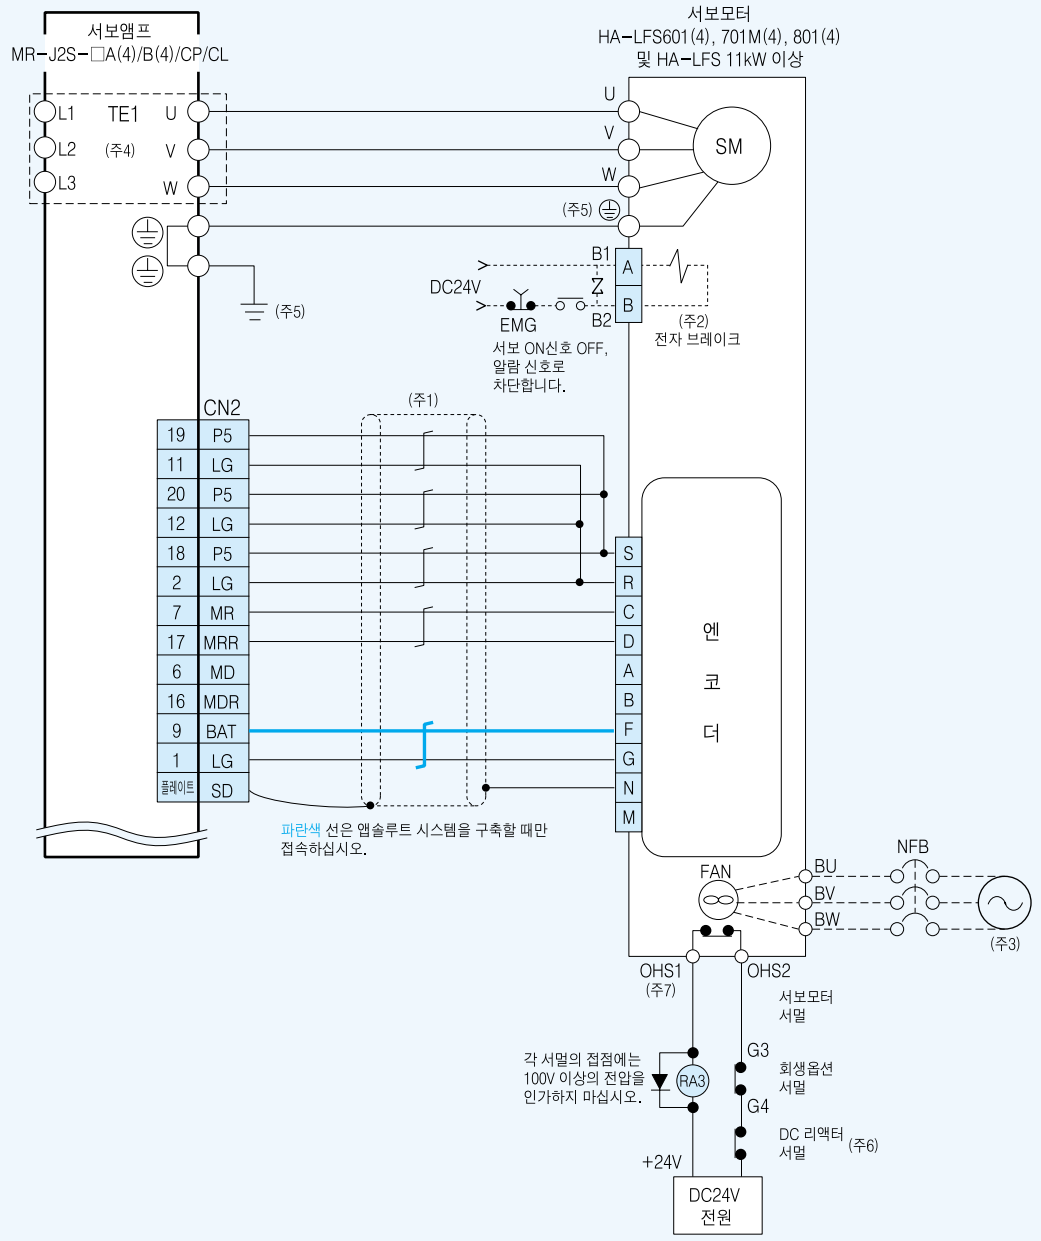


1. MR - J2S
- 2.
- 3.
4. MR - J2S - 30KA(4)/B(4) L1, L2, L3
5. (PE)
6. HA - LFS 30K
7. OHS1 10mA ,3A 가

CN3/CN4/CON2


MR-J2S-700A(4)/CP/CL

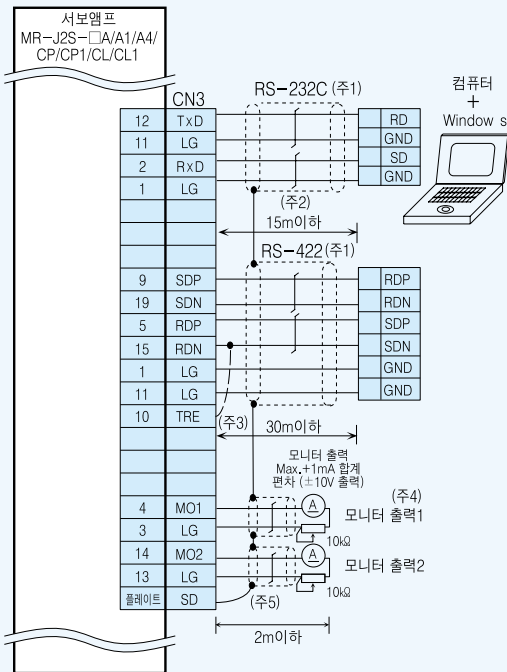

MR-J2S-11KA(4)

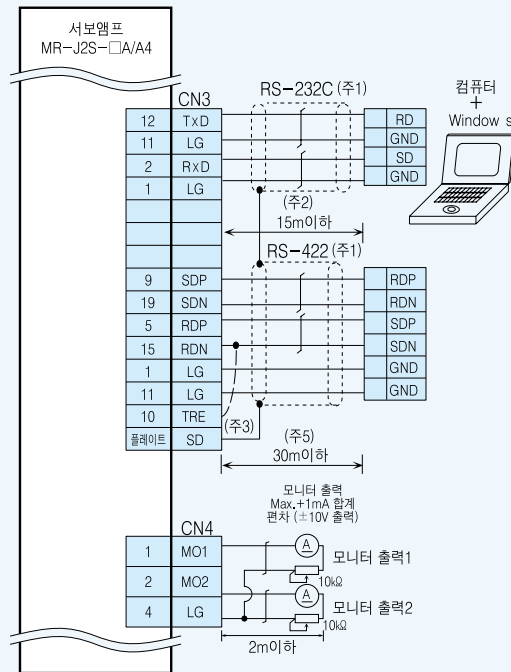


MR-J2S-700B(4)

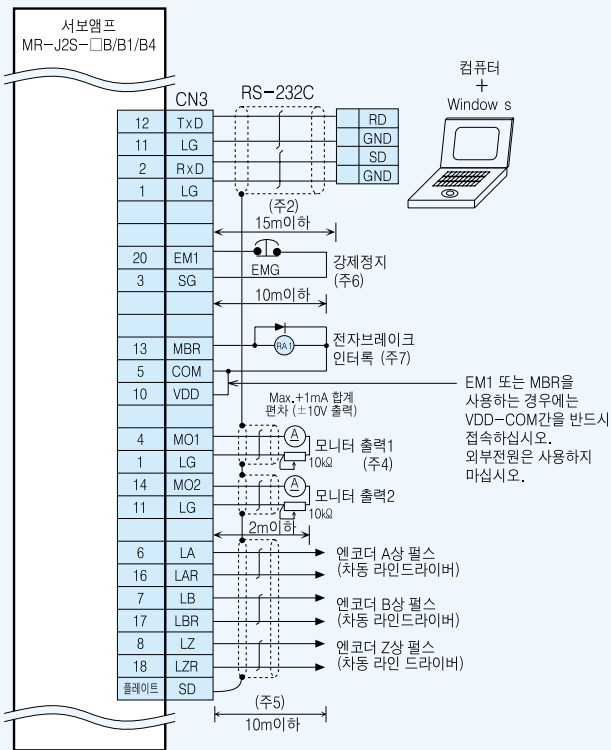

1. RS-232C RS-422
2. RS-232C 38,400bps 3m 15m 가
3. TRE RDN
4. 1(MO1), 2(MO2)
5. AD75M, A1SD75M, QD75M, Q172, Q173
6. EM1-SG 가 가
- 7.

MR-J2S-11KB(4)

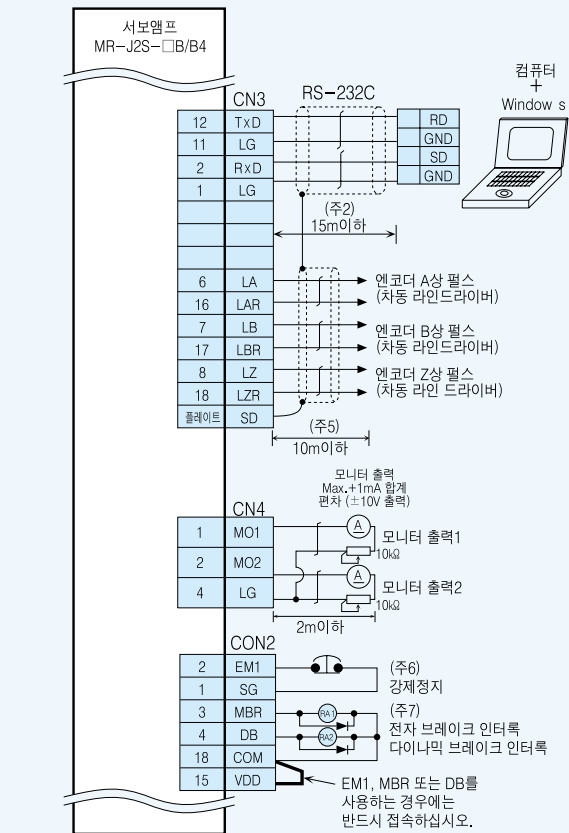

(MR-J2CN3TM)
. A171SH, A172SH, A173UH, A273UH
No.23


HC-KFS

		HC-KFS ()					HC-KFS ()		
HC-KFS		053(B)	13(B)	23(B)	43(B)	73(B)	46	410	
(9) MR-J2S-		10A(1)/B(1)/CP(1)/CL(1)		20A(1)/B(1) CP(1)/CL(1)	40A(1)/B(1) CP(1)/CL(1)	70A/B/CP/CL	70A/B/CP/CL -U005	70A/B/CP/CL -U006	
(2) (kVA)		0.3	0.3	0.5	0.9	1.3	0.9	0.9	
(W)		50	100	200	400	750	400		
(N·m)		0.16	0.32	0.64	1.3	2.4	0.64	0.38	
(N·m)		0.48	0.95	1.9	3.8	7.2	2.87	1.91	
(r/min)		3000					6000	10000	
(r/min)		4500					6000	10000	
(r/min)		5175					6900	11500	
(kW/s)		4.78	12.1	15.8	36.7	37.7	6.4	3.1	
(A)		0.83	0.71	1.1	2.3	5.8	2.9	2.9	
(A)		2.5	2.2	3.4	6.9	18.6	12.9	14.5	
(/)		(5)	(5)	(5)	220	190	110	55	
(3, 4)		(5)	(5)	(5)	220	190	110	55	
() B	J (× 10 ⁻⁴ kg · m ²)	0.053(0.056)	0.084(0.087)	0.260(0.310)	0.460(0.510)	1.51(1.635)	0.64	0.47	
(6)		15		24	22	15			
		17					(1 : 131072p/rev)		
		(IP55) (1, 7)							
		0 40 (), : -15 70 ()							
		80%RH (가), : 90%RH (가)							
		(), 가 . 가 . 가							
	(5)	1000m / X, Y : 49m/s ²					1000m / X, Y : 19.6m/s ²		
(kg)	() B	0.4(0.75)	0.53(0.89)	0.99(1.6)	1.45(2.1)	3.0(4.0)	1.5	1.5	

- 1.
- 2.
3. 가1 (/) 2 1/(m+1) .(m= /) .
- 가 가 (가) (W) .
- : <http://www.mitsubishi-automation.co.kr>
4. 600W 가
5. 가 15
- 6.
7. IP44
8. (bracket)
9. MR-J2S- CP(1)-S084 MR-J2S- CP(1)




HC-KFS

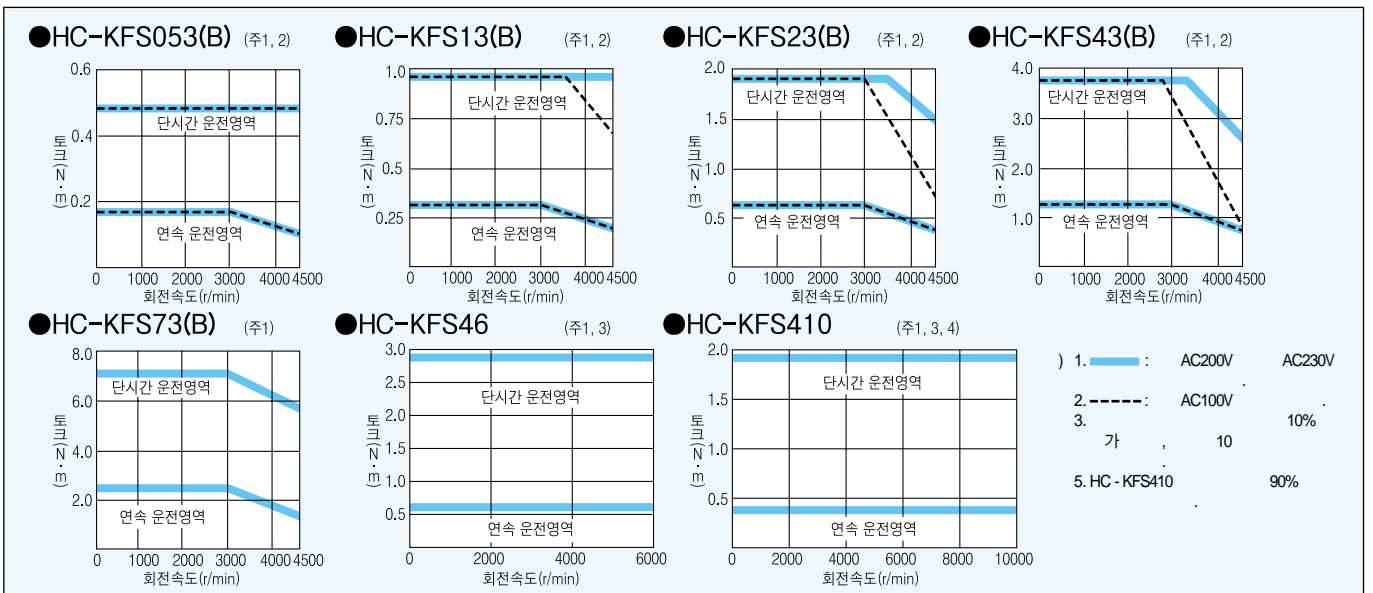


HC-MFS

HC-MFS		HC-MFS ()				
HC-MFS		053 (B)	13 (B)	23 (B)	43 (B)	73 (B)
(9) MR-J2S-		10A(1)/B(1)/CP(1)/CL(1)		20A(1)/B(1)/CP(1)/CL(1)	40A(1)/B(1)/CP(1)/CL(1)	70A/B/CP/CL
(2)	(kVA)	0.3	0.3	0.5	0.9	1.3
	(W)	50	100	200	400	750
	(N·m)	0.16	0.32	0.64	1.3	2.4
	(N·m)	0.48	0.95	1.9	3.8	7.2
	(r/min)	3000				
	(r/min)	4500				
	(r/min)	5175				
	(kW/s)	13.47	34.13	46.02	116.55	94.43
	(A)	0.85		1.5	2.8	5.1
	(A)	2.6		5.0	9.0	18
(3, 4)	(/)	(5)	(5)	(5)	1010	400
() B	J (× 10 ⁻⁴ kg·m ²)	0.019(0.022)	0.03(0.032)	0.088(0.136)	0.143(0.191)	0.6(0.725)
		30 (6)				
		17 (1 : 131072p/rev)				
		(IP55)(1, 7)				
		0 40 (), : -15 70 ()				
		80%RH (가), : 90%RH (가)				
		(), 가 . 가 . 가				
	/ (8)	1000m / X, Y : 49m/s ²				
(kg)	() B	0.4(0.75)	0.53(0.89)	0.99(1.6)	1.45(2.1)	3.0(4.0)

- 1.
- 2.
3. 가1 (/) 2 1/(m+1) (m= /).
- 가 가 (가) (W) .
- : <http://www.mitsubishi-automation.co.kr>
4. 600W 가 30 가
5. 가
- 6.
7. IP44
8. (bracket) 
9. MR-J2S- CP(1)-S084 MR-J2S- CP(1)

HC-MFS

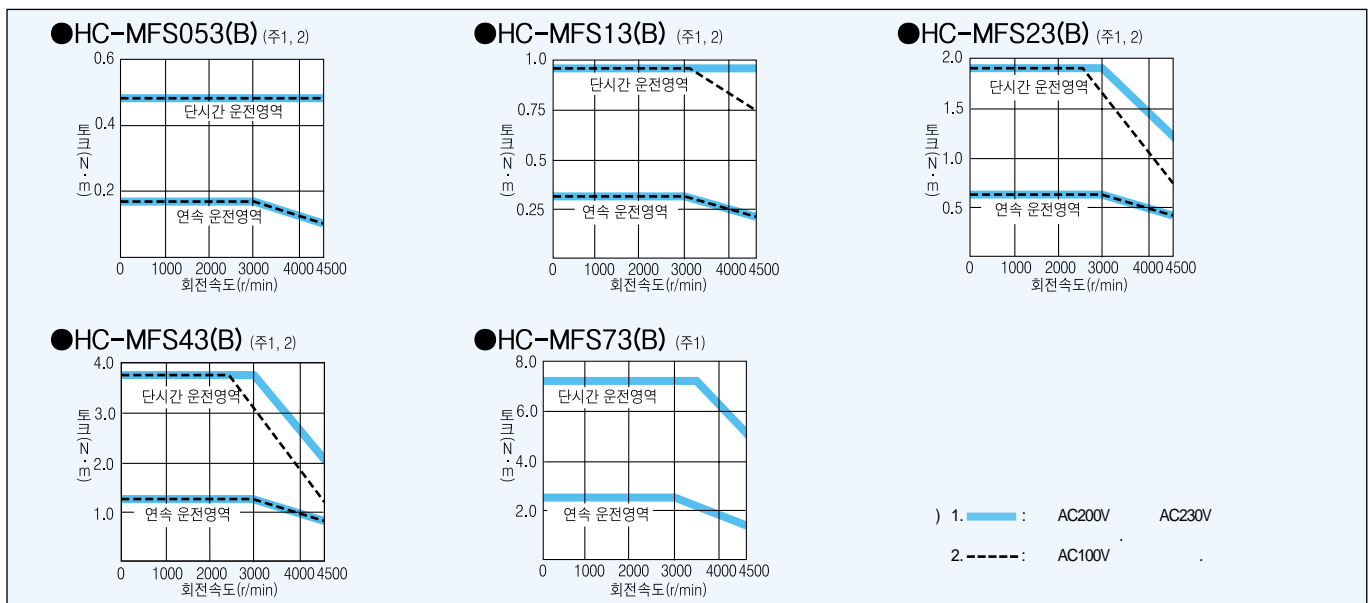

HC-LFS

		HC-LFS ()				
HC-LFS		52(B)	102(B)	152(B)	202(B)	302(B)
(6) MR - J2S -		60A/B/CP/CL	100A/B/CP/CL	200A/B/CP/CL	350A/B/CP/CL	500A/B/CP/CL
(1) (kVA)		1.0	1.7	2.5	3.5	4.8
(kW)		0.5	1.0	1.5	2.0	3.0
(N·m)		2.39	4.78	7.16	9.55	14.3
(N·m)		7.16	14.4	21.6	28.5	42.9
(r/min)		2000				
(r/min)		3000				
(r/min)		3450				
(kW/s)		17.9	49.7	80.1	41.5	56.8
(A)		3.2	5.9	9.9	14	23
(A)		9.6	18	30	42	69
(/)		115	160	425	120	70
() B	J (× 10 ⁻⁴ kg · m ²)	3.2(5.2)	4.6(6.6)	6.4(8.4)	22(32)	36(46)
		10 (4)				
		17 (1 : 131072p/rev)				
		(IP65)				
		0 40 (), : -15 70 ()				
		80%RH (가), : 90%RH (가)				
		(), 가 . 가 . 가				
/ (5)		1000m / X : 9.8m/s ² , Y : 24.5m/s ²			1000m / X : 19.6m/s ² , Y : 49m/s ²	
(kg)	() B	6.5(9.0)	8.0(10.5)	10.0(12.5)	21(27)	28(34)

1. 가1
2. 가1 (/) 2 1/(m+1) .(m= /) .


가 가 가 (W) .

: <http://www.mitsubishi-automation.co.kr>

3. 600W
4.
5. (bracket) 가

6. MR - J2S - CP(1) - S084 MR - J2S - CP(1) 

HC-LFS

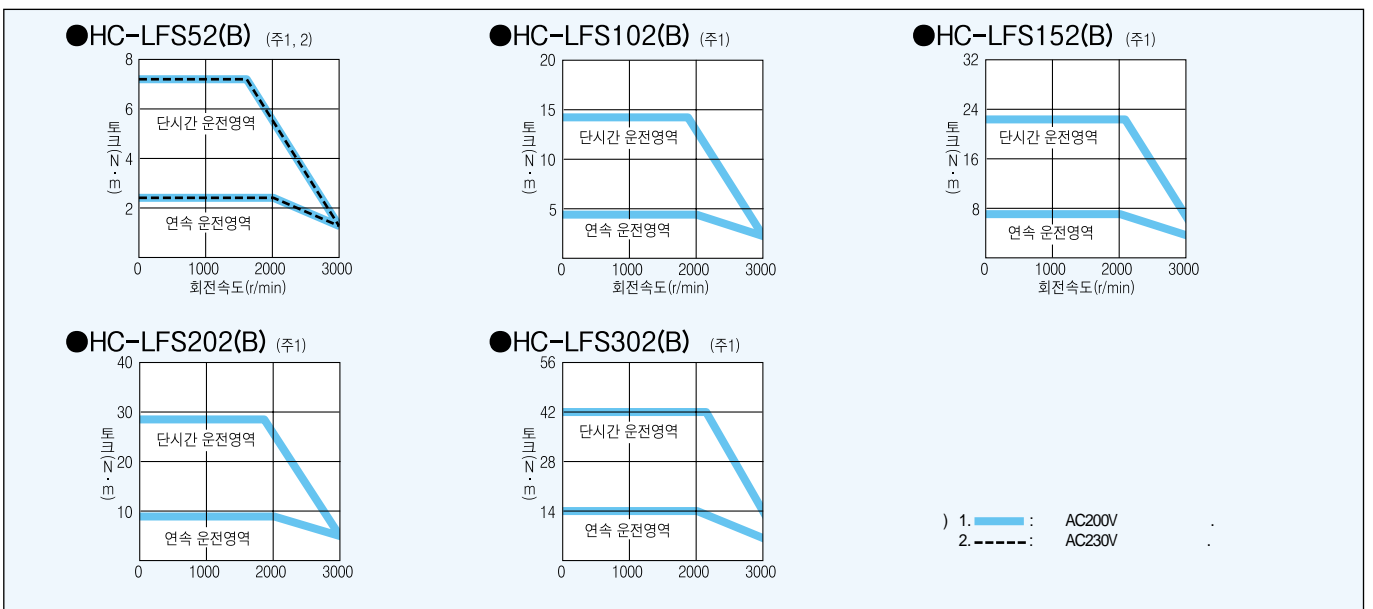


MELSERVO J2 Super

HC-SFS (200V)

		HC-SFS 1000r/min (.)				HC-SFS 2000r/min (.)			
HC-SFS		81(B)	121(B)	201(B)	301(B)	52(B)	102(B)	152(B)	
(7) MR - J2S -		100A/B/CP/CL	200A/B/CP/CL		350A/B/CP/CL	60A/B/CP/CL	100A/B/CP/CL	200A/B/CP/CL	
(1) (kVA)		1.5	2.1	3.5	4.8	1.0	1.7	2.5	
(kW)		0.85	1.2	2.0	3.0	0.5	1.0	1.5	
(N · m)		8.12	11.5	19.1	28.6	2.39	4.78	7.16	
(N · m)		24.4	34.4	57.3	85.9	7.16	14.4	21.6	
(r/min)		1000				2000			
(r/min)		1500	1200		3000				
(r/min)		1725	1380		3450				
(kW/s)		32.9	30.9	44.5	81.3	8.7	16.7	25.6	
(A)		5.1	7.1	9.6	16	3.2	6	9	
(A)		15.3	21.3	28.8	48	9.6	18	27	
(/)		140	240	100	84	56	54	136	
() B	J (× 10 ⁻⁴ kg · m ²)	20.0(22.0)	42.5(52.5)	82.0(92.0)	101(111)	6.6(8.6)	13.7(15.7)	20.0(22.0)	
		15 (4)							
		17 (1)				: 131072p/rev)			
		(IP65)				(IP65) (5)			
		0 40 (), : -15 70 ()							
		80%RH (가), : 90%RH (가)							
		(), 가 . 가 . . 가							
		1000m							
(6) X, Y : 24.5m/s ²		X : 24.5m/s ² Y : 49m/s ²		X : 24.5m/s ² Y : 29.4m/s ²		X, Y : 24.5m/s ²			
(kg)	() B	9(11)	12(18)	19(25)	23(29)	5(7)	7(9)	9(11)	



1. 가1
 2. 가1 (/ 가) 2 1(m+1) (m= /).
 가 가 가 가 (W)
 : <http://www.mitsubishi-automation.co.kr>
 3. 600W 가

HC-SFS (200V)

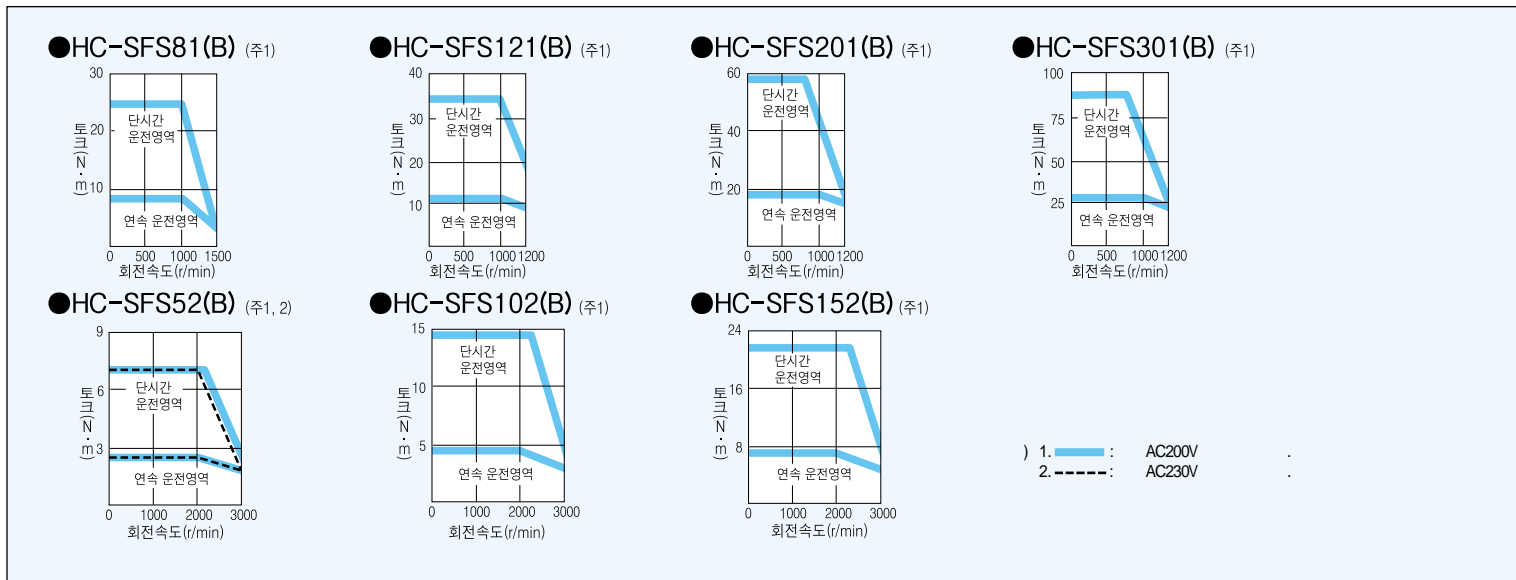


HC-SFS 2000r/min ()					HC-SFS 3000r/min ()				
202(B)	352(B)	502(B)	702(B)		53(B)	103(B)	153(B)	203(B)	353(B)
200A/B/CP/CL	350A/B/CP/CL	500A/B/CP/CL	700A/B/CP/CL		60A/B/CP/CL	100A/B/CP/CL	200A/B/CP/CL		350A/B/CP/CL
3.5	5.5	7.5	10.0		1.0	1.7	2.5	3.5	5.5
2.0	3.5	5.0	7.0		0.5	1.0	1.5	2.0	3.5
9.55	16.7	23.9	33.4		1.59	3.18	4.78	6.37	11.1
28.5	50.1	71.6	100		4.77	9.55	14.3	19.1	33.4
2000					3000				
2500			2000		3000				
2875			2300		3450				
21.5	34.1	56.5	69.7		3.8	7.4	11.4	9.5	15.1
11	17	26	35		3.2	5.3	8.6	10.4	16.4
33	51	84	105		9.6	15.9	25.8	31.2	49.2
64	31	39	32		25	24	82	24	14
42.5(52.5)	82.0(92.0)	101(111)	160(170)		6.6(8.6)	13.7(15.7)	20.0(22.0)	42.5(52.5)	82.0(92.0)
					15 (4)				
					17 (1 : 131072p/rev)				
(IP65)(5)					(IP65)				
0 40 ()					: -15 70 ()				
80%RH (가)					: 90%RH (가)				
()					가 . 가 . 가				
					1000m				
X : 24.5m/s ² Y : 49m/s ²		X : 24.5m/s ² Y : 29.4m/s ²		X, Y : 24.5m/s ²			X : 24.5m/s ² Y : 49m/s ²		
12(18)	19(25)	23(29)	32(38)	5(7)	7(9)	9(11)	12(18)	19(25)	

- 4.
- 5. IP44
- 6.
- 7. MR-J2S- CP(1)-S084

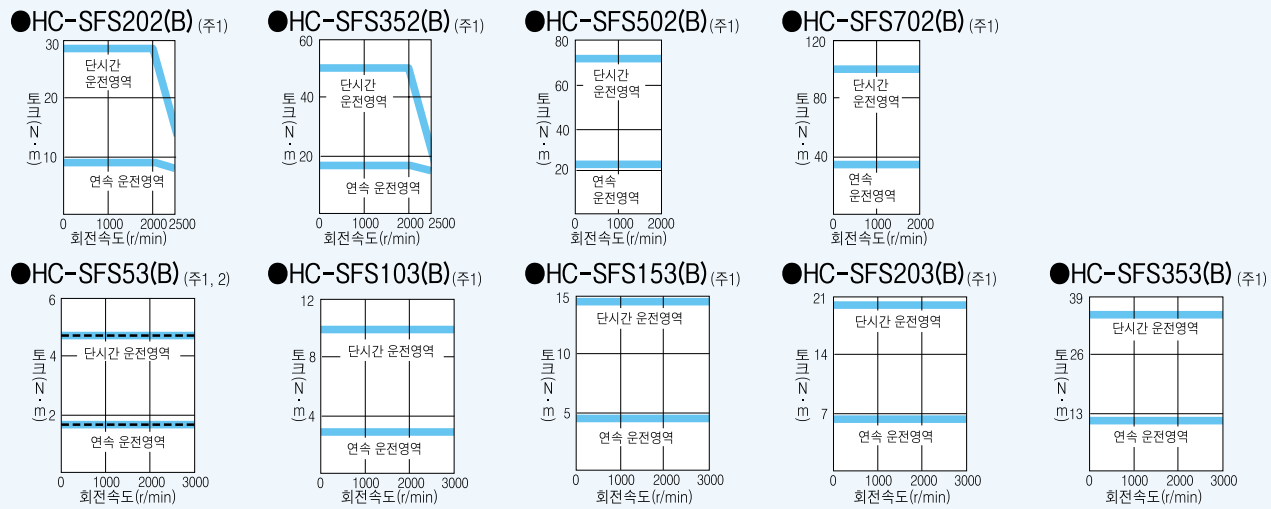


HC-SFS (400V)

		HC-SFS 2000r/min ()						
HC-SFS		524 (B)	1024 (B)	1524 (B)	2024 (B)	3524 (B)	5024(B)	7024(B)
MR-J2S-		60A4/B4	100A4/B4	200A4/B4		350A4/B4	500A4/B4	700A4/B4
	(1) (kVA)	1.0	1.7	2.5	3.5	5.5	7.5	10.0
	(kW)	0.5	1.0	1.5	2.0	3.5	5.0	7.0
	(N·m)	2.39	4.78	7.16	9.55	16.7	23.9	33.4
	(N·m)	7.16	14.4	21.6	28.5	50.1	71.6	100
	(r/min)	2000						
	(r/min)	3000			2500		2000	
	(r/min)	3450			2875		2300	
	(kW/s)	8.7	16.7	25.6	21.5	34.1	56.5	69.7
	(A)	1.5	2.8	4.4	5.4	8.6	14	17
	(A)	4.5	8.4	13.2	16.2	25.8	42	51
(2, 3) (/)	56	54	136	64	31	39	32	
() B	J (× 10 ⁻⁴ kg · m ²)	6.6(8.6)	13.7(15.7)	20.0(22.0)	42.5(52.5)	82.0(92.0)	101(111)	160(170)
		15 (4)						
		17 (1) : 131072p/rev)						
		(IP65) (5)						
		0 40 (), : -15 70 ()						
		80%RH (가), : 90%RH (가)						
		(), 가 . 가 . . 가						
		1000m						
(6)		X, Y : 24.5m/s ²			X : 24.5m/s ² Y : 49m/s ²		X : 24.5m/s ² Y : 29.4m/s ²	
(kg)	() B	5(7)	7(9)	9(11)	12(18)	19(25)	23(29)	32(38)

- 1.
2. 가1 (/) 2 1/(m+1) .(m= /).
- 가 가 가 (W) .
3. 600W
4. IP44
5. bracket)
6. 

: <http://www.mitsubishi-automation.co.kr>

HC-SFS (400V)

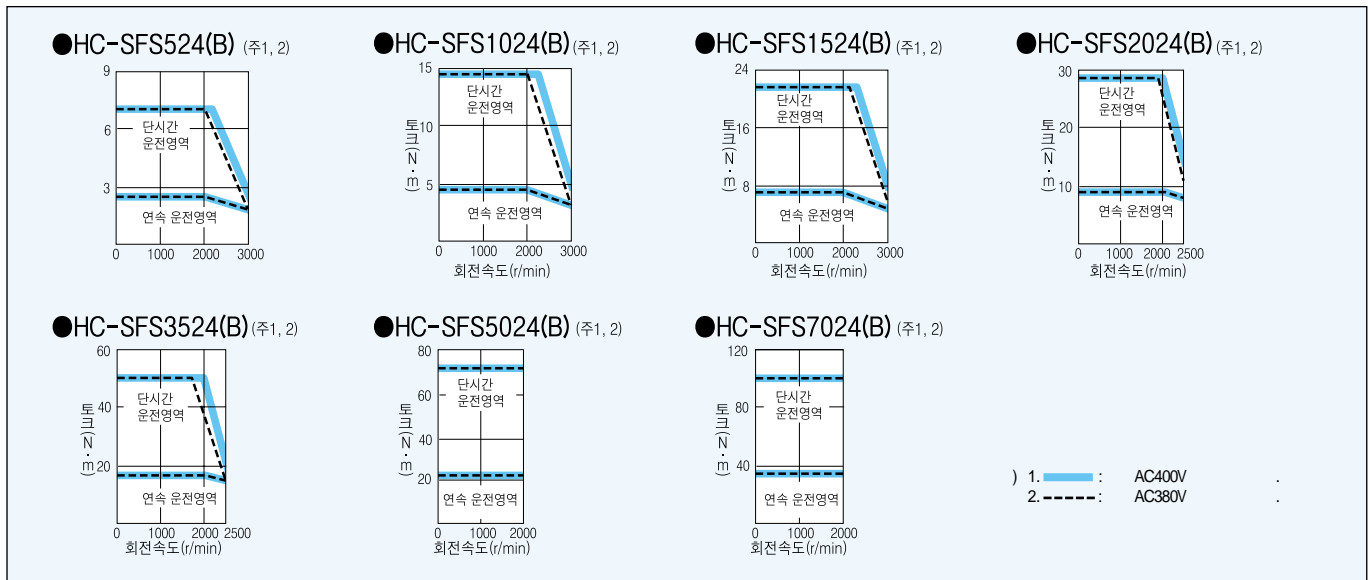

HC-RFS

HC-RFS		HC-RFS ()				
HC-RFS		103(B)	153(B)	203(B)	353(B)	503(B)
(6) MR-J2S-		200A/B/CP/CL		350A/B/CP/CL	500A/B/CP/CL	
(1)	(kVA)	1.7	2.5	3.5	5.5	7.5
	(kW)	1.0	1.5	2.0	3.5	5.0
	(N·m)	3.18	4.78	6.37	11.1	15.9
	(N·m)	7.95	11.9	15.9	27.9	39.7
	(r/min)	3000				
	(r/min)	4500				
	(r/min)	5175				
	(kW/s)	67.4	120	176	150	211
	(A)	6.1	8.8	14	23	28
	(A)	18.4	23.4	37	58	70
(2)		1090	860	710	174	125
() B	J (× 10 ⁻⁴ kg·m ²)	1.5(1.85)	1.9(2.25)	2.3(2.65)	8.6(11.8)	12.0(15.5)
		5 (3)				
		17 (1 : 131072p/rev)				
		(IP65)(4)				
		0 40 (), : -15 70 ()				
		80%RH (가), : 90%RH (가)				
		(), 가 . 가 . 가				
		/ (5) 1000m / X, Y : 24.5m/s ²				
(kg)	() B	3.9(6.0)	5.0(7.0)	6.2(8.3)	12(15)	17(21)

1. 가1 1/(m+1) (m= /).

2. 가 가 가 (/ 가) 2 가 (W) .


3. : <http://www.mitsubishi-automation.co.kr>

4. IP44 (bracket)



6. MR-J2S- CP(1)-S084 MR-J2S- CP(1)

HC-RFS

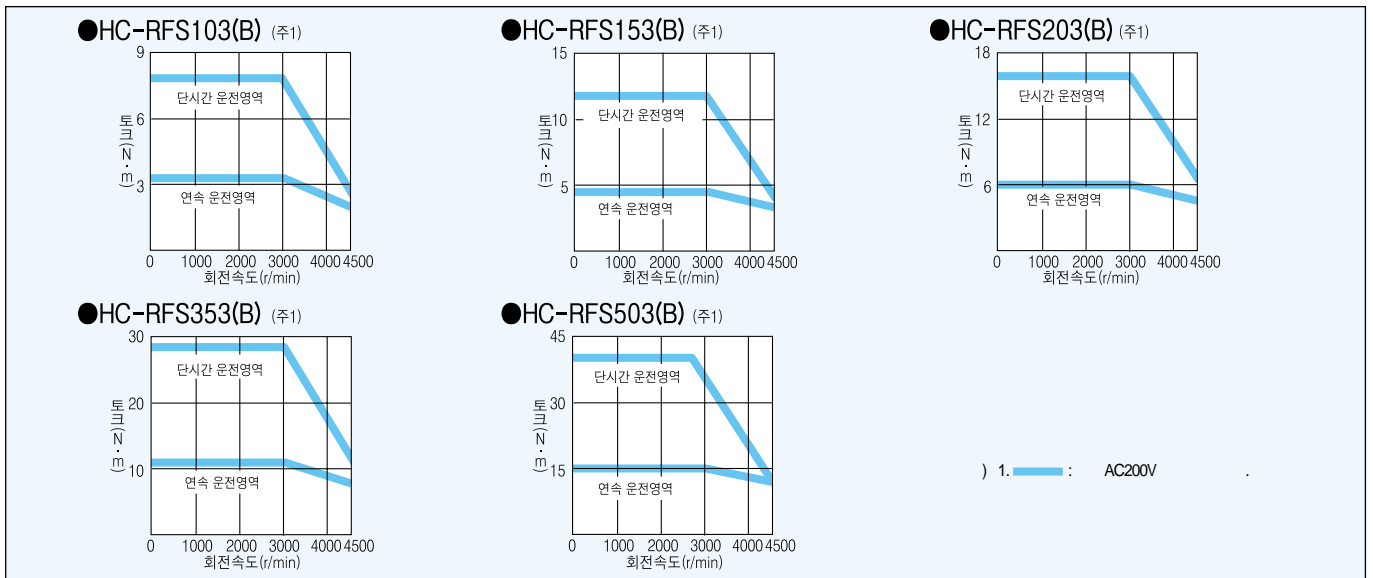

MELSERVO J2 Super

HA-LFS 1000r/min (200V)


		HA-LFS 1000r/min ()							
HA-LFS		601(B)	801(B)	12K1(B)	15K1	20K1	25K1	30K1	37K1(1)
MR-J2S-		700A/B/CP/CL (6)	11KA/B		15KA/B	22KA/B		30KA/B	37KA/B
		MR-HP30KA							
(2) (kVA)		8.6	12	18	22	30	38	48	59
(kW)		6.0	8.0	12	15	20	25	30	37(75%ED)
(N·m)		57.3	76.4	115	143	191	239	286	353
(N·m)		172	229	344	415	477	597	716	883
(r/min)		1000							
(r/min)		1200							
(r/min)		1380							
(kW/s)		313	265	445	373	561	528	626	668
(A)		34	42	61	83	118	118	154	188
(A)		102	126	183	249	295	295	385	470
(3) (/)		158	354 (8)	264 (8)	230 (8)	195 (8)	117 (8)	-	-
() B J (× 10 ⁻⁴ kg · m ²)		105 (113)	220 (293)	295 (369)	550	650	1080	1310	1870
		10 (4)							
		17 (1) : 131072p/rev							
		(IP44)							
		0 40 (), : - 15 70 ()							
		80%RH (가), : 90%RH (가)							
		(), 가 . 가 . 가							
		1000m							
(5)		X : 11.7m/s ² Y : 29.4m/s ²				X : 9.8m/s ² Y : 9.8m/s ²			
(kg) () B		55(70)	95(126)	115(146)	160	180	230	250	335
		AC200-220V/50Hz AC200-230V/60Hz							
(W)		42(50Hz)/ 54(60Hz)	32(50Hz)/ 40(60Hz)		45(50Hz)/ 63(60Hz)			120(50Hz)/ 175(60Hz)	
(A)		0.21(50Hz)/ 0.25(60Hz)	0.30(50Hz)/ 0.25(60Hz)		0.32(50Hz)/ 0.35(60Hz)			0.65(50Hz)/ 0.80(60Hz)	

- 가 37kW 75% 가 . DC (MR-DCL37K)
-
- 가1 1/(m+1) .(m= /).

가 (/) 2 가 (W)

: <http://www.mitsubishi-automation.co.kr>

HA-LFS 1000r/min (200V)

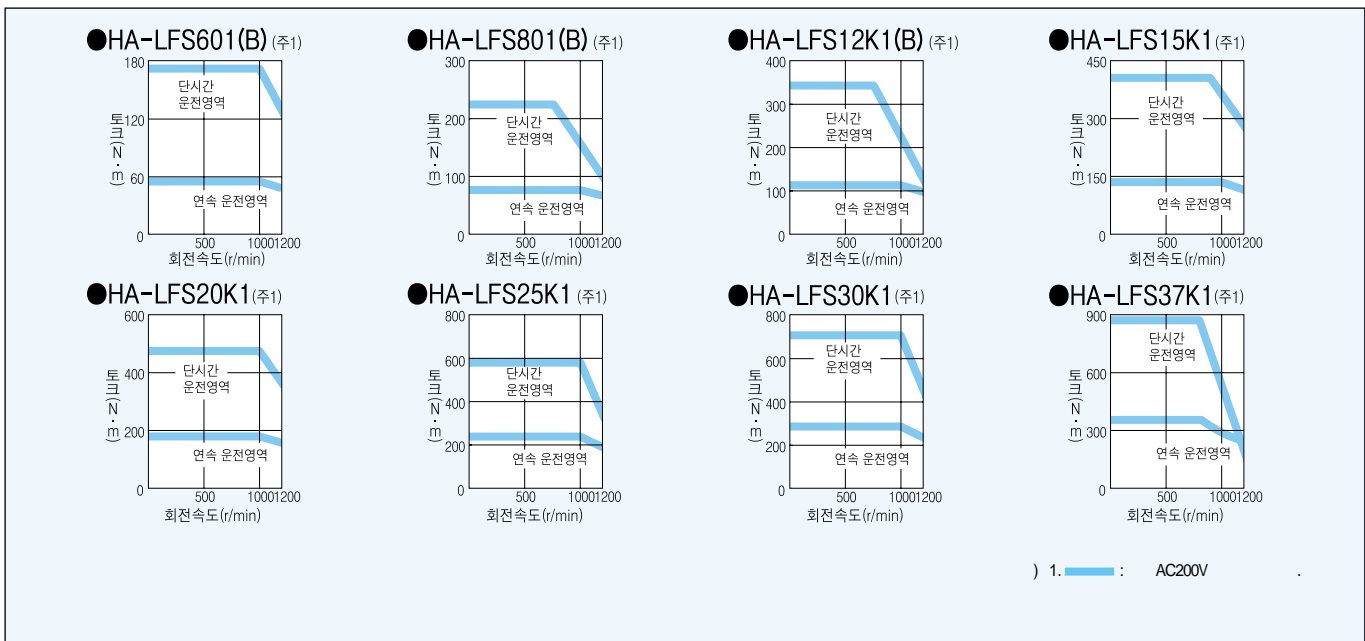


HA-LFS 1000r/min (400V)

HA-LFS 1000r/min ()							
6014(B)	8014(B)	12K14(B)	15K14	20K14	25K14	30K14	37K14
() (7)	() (7)	() (7)		() (7)	() (7)		
700A4/B4 - U071	11KA4/B4 - U061	11KA4/B4 - U062	15KA4/B4 - U063	22KA4/B4 - U064	30KA4/B4 - U065	30KA4/B4	37KA4/B4
() (7)	() (7)	() (7)		() (7)	() (7)		
-	-	-	-	-	MR - HP55KA4		
8.6	12	18	22	30	38	48	59
6.0	8.0	12	15	20	25	30	37
57.3	76.4	115	143	191	239	286	353
172	229	344	415	477	597	716	883
1000							
1200							
1380							
313	265	445	373	561	528	626	668
17	20	30	40	55	70	77	95
51	63	93	126	148	175	193	235
158	354	264	230	195	-	-	-
	(8)	(8)	(8)	(8)			
105	220	295	550	650	1080	1310	1870
(113)	(293)	(369)					
10 (4)							
17 (1 : 131072p/rev)							
IP44							
0 40 (), : - 15 70 ()							
80%RH (가), : 90%RH (가)							
(), 가 . 가 . 가							
1000m							
X : 11.7m/s ² Y : 29.4m/s ²				X : 9.8m/s ² Y : 9.8m/s ²			
55(70)	95(126)	115(146)	160	180	230	250	335
AC200-220V/50Hz	AC380-420V / 50/60Hz			AC380-460V / 50/60Hz			
AC200-230V/60Hz							
42(50Hz)/	55(50Hz)/		65(50Hz)/		110(50Hz)/		
54(60Hz)	75(60Hz)		85(60Hz)		150(60Hz)		
0.21(50Hz)/	0.12(50Hz)/		0.12(50Hz)/		0.20(50Hz)/		
0.25(60Hz)	0.11(60Hz)		0.14(60Hz)		0.22(60Hz)		

-
-
- MR - J2S- CP(1) - S084
- MR - J2S- CP(1)
- GRZG400- No.0(MR - J2S - A) No.2(MR - J2S - B) (1.0m³/min, 92×2)



HA-LFS 1000r/min (400V)

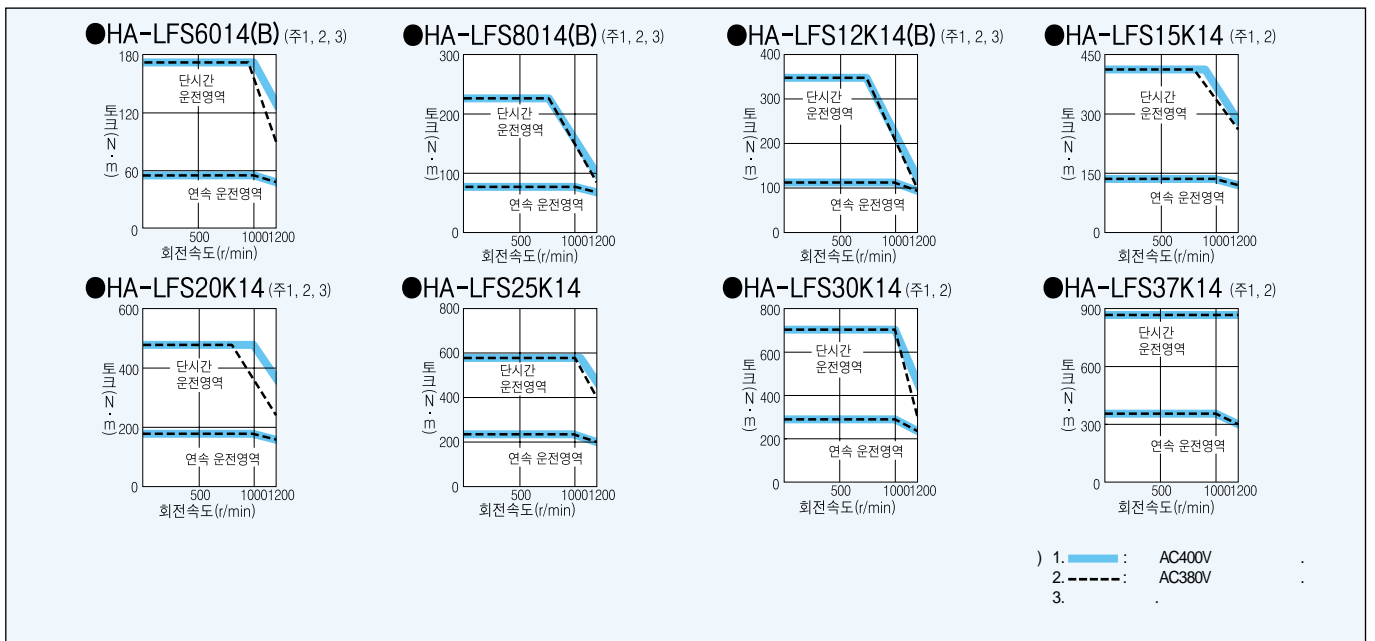

HA-LFS 1500r/min (200V)


		HA-LFS 1500r/min ()					
		701M(B)	11K1M(B)	15K1M(B)	22K1M	30K1M	37K1M(1)
		700A/B/CP/CL (6)	11KA/B	15KA/B	22KA/B	30KA/B	37KA/B
		MR - HP30KA					
(2)	(kVA)	10	16	22	33	48	59
	(kW)	7.0	11	15	22	30	37(75%ED)
	(N·m)	44.6	70.0	95.5	140	191	236
	(N·m)	134	210	286	350	477	589
	(r/min)	1500					
	(r/min)	2000					
	(r/min)	2300					
	(kW/s)	189	223	309	357	561	514
	(A)	37	65	87	126	174	202
	(A)	111	195	261	315	435	505
(3)	(/)	70	158 (8)	191 (8)	102 (8)	-	-
() B	J (× 10 ⁻⁴ kg · m ²)	105 (113)	220 (293)	295 (369)	550	650	1080
		10 (4)					
		17 (1) : 131072p/rev)					
		(IP44)					
		0 40 (), : - 15 70 ()					
		80%RH (가), : 90%RH (가)					
		(), 가 . 가 . 가					
		1000m					
(5)		X : 11.7m/s ² Y : 29.4m/s ²			X : 9.8m/s ² Y : 9.8m/s ²		
(kg)	() B	55(70)	95(126)	115(146)	160	180	230
		AC200~220V/50Hz AC200~230V/60Hz		AC200~220V/50Hz AC200~230V/60Hz			
	(W)	42(50Hz)/ 54(60Hz)	32(50Hz)/ 40(60Hz)		45(50Hz)/ 63(60Hz)	120(50Hz)/ 175(60Hz)	
	(A)	0.21(50Hz)/ 0.25(60Hz)	0.30(50Hz)/ 0.25(60Hz)		0.32(50Hz)/ 0.35(60Hz)	0.65(50Hz)/ 0.80(60Hz)	

- 가 37kW 75% 가 . DC (MR - DCL37K)
-
- 가 1 1/(m+1) .(m= /).

가 (/) 2 (W)


: <http://www.mitsubishi-automation.co.kr>

HA-LFS 1500r/min (200V)

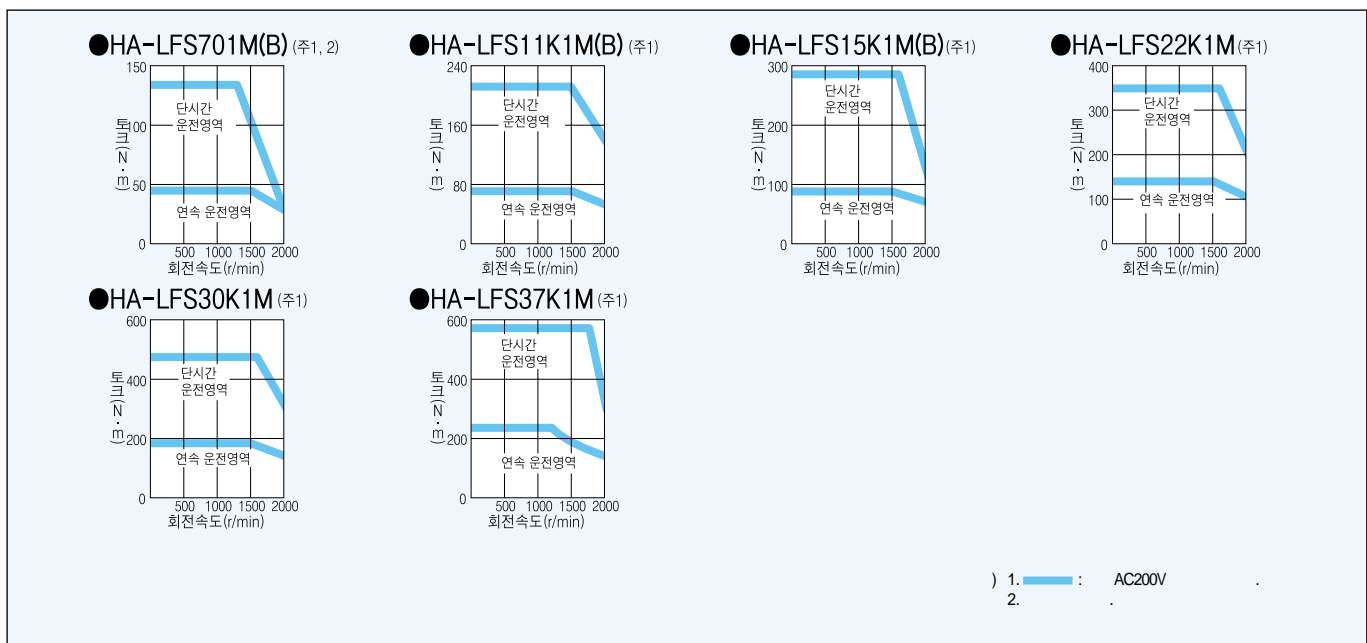


HA-LFS 1500r/min (400V)

HA-LFS 1500r/min ()							
701M4(B) () (7)	11K1M4(B)	15K1M4(B)	22K1M4	30K1M4	37K1M4	45K1M4	50K1M4
700A4/B4 - U073 () (7)	11KA4/B4	15KA4/B4	22KA4/B4	30KA4/B4	37KA4/B4	45KA4/B4	55KA4/B4
MR - HP55KA4							
10	16	22	33	48	59	71	80
7.0	11	15	22	30	37	45	50
44.6	70.0	95.5	140	191	236	286	318
134	210	286	350	477	589	716	796
1500 2000 2300							
189	223	309	357	561	514	626	542
18	33	41	63	87	101	128	143
54	99	132	158	218	253	320	358
70	158 (8)	191 (8)	102 (8)	-	-	-	-
105 (113)	220 (293)	295 (369)	550	650	1080	1310	1870
10 (4) 17 (1 : 131072p/rev)							
IP44							
0 40 (), : - 15 70 () 80%RH (가), : 90%RH (가) (), 가 . 가 . 가							
1000m							
X : 11.7m/s ² Y : 29.4m/s ²				X : 9.8m/s ² Y : 9.8m/s ²			
55(70)	95(126)	115(146)	160	180	230	250	335
AC380~420V 50/60Hz			AC380~460V 50/60Hz				
42(50Hz)/ 54(60Hz)	55(50Hz)/ 75(60Hz)		65(50Hz)/ 85(60Hz)		110(50Hz)/ 150(60Hz)		
0.21(50Hz)/ 0.25(60Hz)	0.12(50Hz)/ 0.11(60Hz)		0.12(50Hz)/ 0.14(60Hz)		0.20(50Hz)/ 0.22(60Hz)		

- 4.
5. (bracket) 
6. MR - J2S - CP(1) - S084 MR - J2S - CP(1)
- 7.
8. GRZG400 - No.0(MR - J2S - A) No.2(MR - J2S - B) (1.0m³/min, 92×2)

HA-LFS 1500r/min (400V)

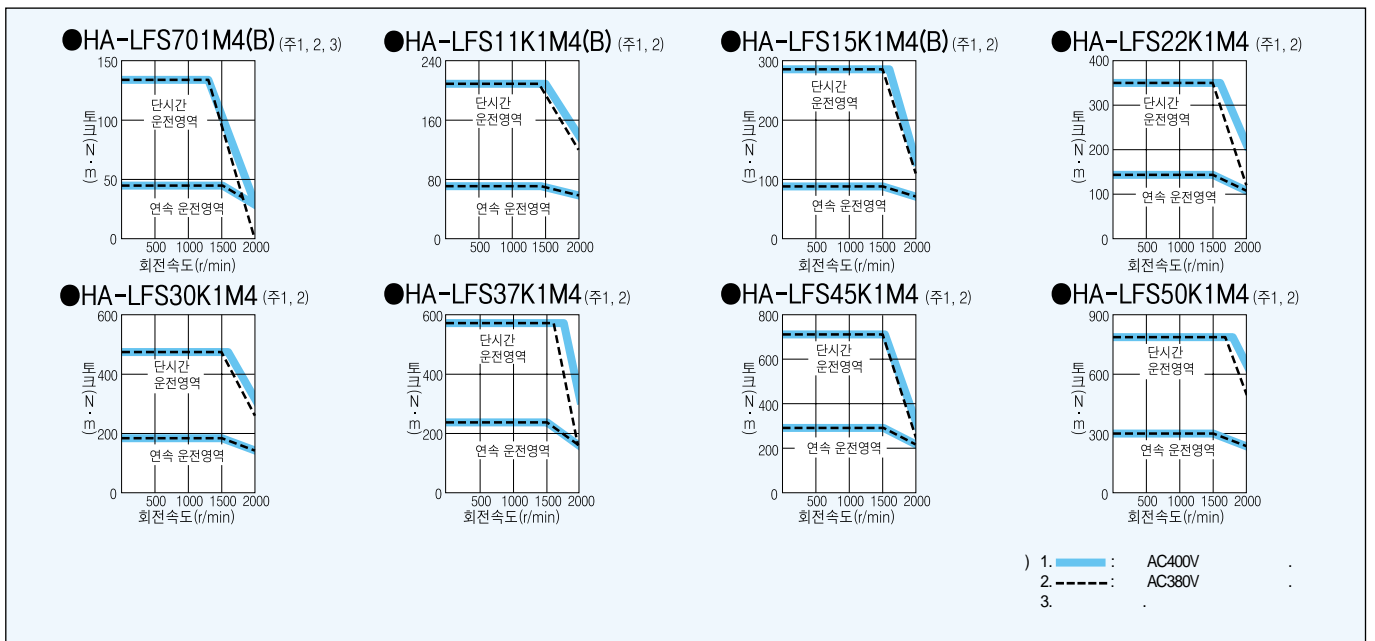


HA - LFS 2000r/min (200V)

		HA - LFS 2000r/min ()						
HA - LFS		502	702	11K2(B)	15K2(B)	22K2(B)	30K2	37K2(1)
MR - J2S -		500A/B/CP/CL (6)	700A/B/CP/CL (6)	11KA/B	15KA/B	22KA/B	30KA/B	37KA/B
		-	-	-	-	-	MR - HP30KA	
(2)	(kVA)	7.5	10.0	16	22	33	48	59
	(kW)	5.0	7.0	11	15	22	30	37(75% ED)
	(N · m)	23.9	33.4	52.5	71.6	105	143	177
	(N · m)	71.6	100	158	215	263	358	442
	(r/min)	2000						
	(r/min)	2000						
	(r/min)	2300						
	(kW/s)	77.2	118	263	233	374	373	480
	(A)	25	34	63	77	112	166	204
	(A)	75	102	189	231	280	415	510
(3)	(/)	50	50	186	144	107	-	-
() B	J (× 10 ⁻⁴ kg · m ²)	74.0	94.2	105 (113)	220 (293)	295 (369)	550	650
		17 (1 (4) : 131072p/rev)						
		(IP65) (IP44)						
		0 40 (), : - 15 70 ()						
		80%RH (가), : 90%RH (가)						
		(), 가 . 가 . 가						
		1000m						
(5)		X : 11.7m/s ² Y : 29.4m/s ²				X : 9.8m/s ² Y : 9.8m/s ²		
(kg)	() B	28	35	55(70)	95(126)	115(146)	160	180
		-	-	AC200~220V/50Hz AC200~230V/60Hz	AC200~220V/50Hz AC200~230V/60Hz			-
	(W)	-	-	42(50Hz)/ 54(60Hz)	32(50Hz)/ 40(60Hz)	45(50Hz)/ 63(60Hz)		-
	(A)	-	-	0.21(50Hz)/ 0.25(60Hz)	0.30(50Hz)/ 0.25(60Hz)	0.32(50Hz)/ 0.35(60Hz)		-

- 가 37kW 75% 가 . DC (MR - DCL37K)
 -
 - 가1 (/) 2 1/(m+1) .(m= /).
- 가 가 가 (W)
- : <http://www.mitsubishi-automation.co.kr>

HA - LFS 2000r/min (200V)

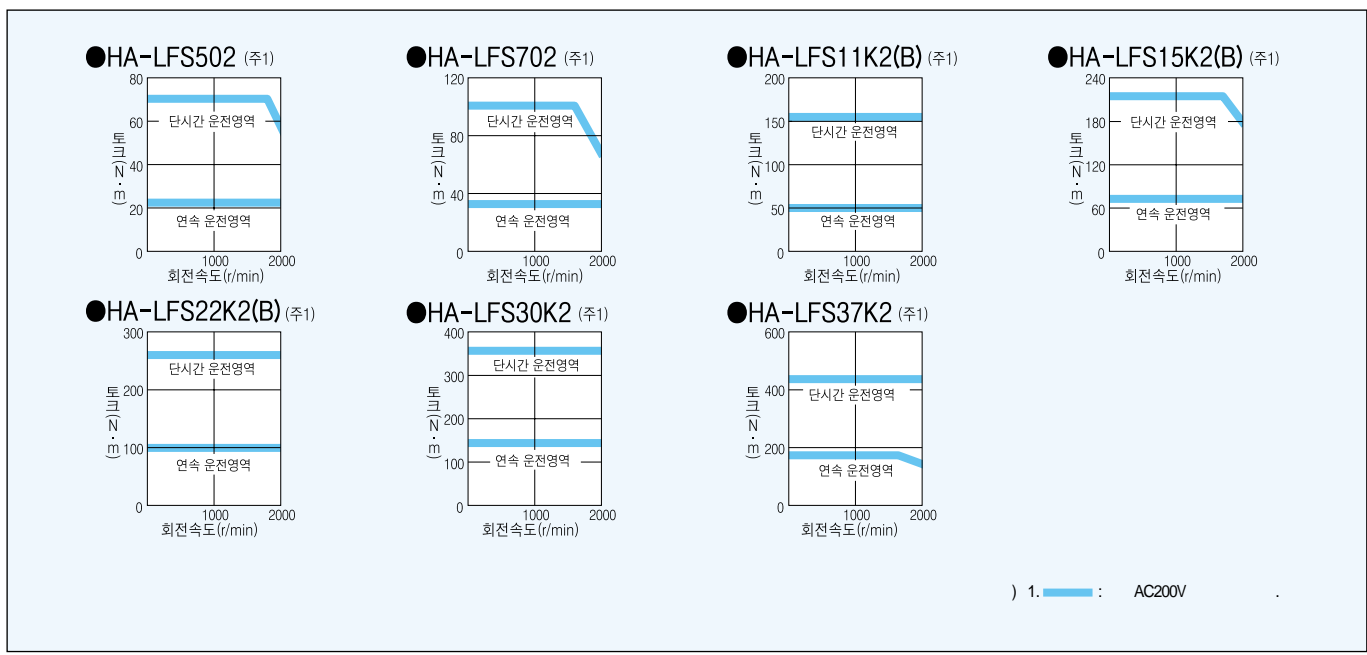


HA-LFS 2000r/min (400V)

HA-LFS 2000r/min ()						
11K24(B)	15K24(B)	22K24(B)	30K24	37K24	45K24	55K24
11KA4/B4	15KA4/B4	22KA4/B4	30KA4/B4	37KA4/B4	45KA4/B4	55KA4/B4
-	-	-	MR - HP55KA4			
16	22	33	48	59	71	87
11	15	22	30	37	45	55
52.5	71.6	105	143	177	215	263
158	215	263	358	442	537	657
			2000			
			2000			
			2300			
263	233	374	373	480	427	526
32	40	57	83	102	131	143
96	117	140	208	255	328	358
186	144	107	-	-	-	-
(7)	(7)	(7)	-	-	-	-
105	220	295	550	650	1080	1310
(113)	(293)	(369)				
			10	(4)		
			17	(1 : 131072p/rev)		
(IP44)						
0 40 (), : - 15 70 ()						
80%RH (가), : 90%RH (가)						
(), 가 . 가 . 가						
1000m						
X : 11.7m/s ² Y : 29.4m/s ²			X : 9.8m/s ² Y : 9.8m/s ²			
55(70)	95(126)	115(146)	160	180	230	250
AC200-220V/50Hz	AC380-420V 50/60Hz		AC380-460V 50/60Hz			
AC200-230V/60Hz						
42(50Hz)/ 54(60Hz)	55(50Hz)/ 75(60Hz)		65(50Hz)/ 85(60Hz)		110(50Hz)/ 150(60Hz)	
0.21(50Hz)/ 0.25(60Hz)	0.12(50Hz)/ 0.11(60Hz)		0.12(50Hz)/ 0.14(60Hz)		0.20(50Hz)/ 0.22(60Hz)	

4. ()
 5. ()
 6. MR - J2S - CP(1) - S084 ()
 7. GRZG400 - ()
- MR - J2S - CP(1) No.0(MR - J2S - A) ()
 No.2(MR - J2S - B) () (1.0m³/min, 92x2)



HA-LFS 2000r/min (400V)

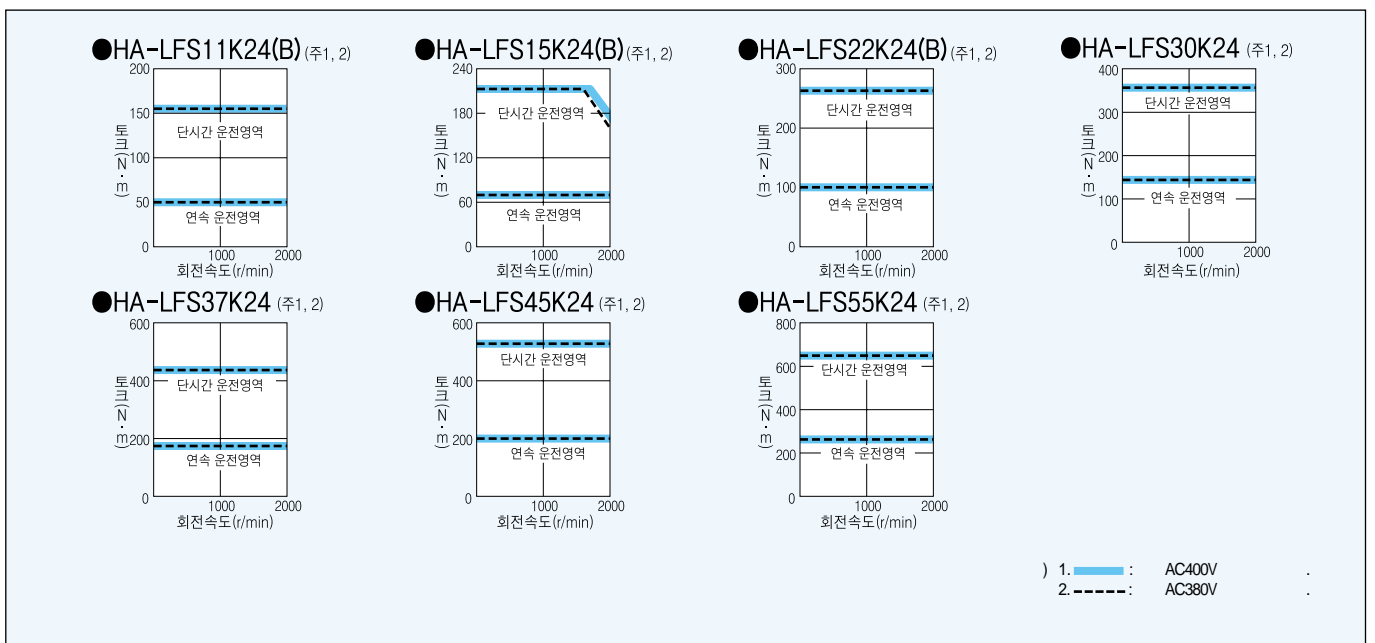

HC-UFS

		HC-UFS 2000r/min ()					HC-UFS 3000r/min ()				
HC-UFS		72(B)	152(B)	202(B)	352(B)	502(B)	13(B)	23(B)	43(B)	73(B)	
MR-J2S-		70A/B/CP/CL	200A/B/CP/CL	350A/B/CP/CL	500A/B/CP/CL		10A(1)/B(1)/CP(1)/CL(1)	20A(1)/B(1)/CP(1)/CL(1)	40A(1)/B(1)/CP(1)/CL(1)	70A/B/CP/CL	
(8)	(1) (kVA)	1.3	2.5	3.5	5.5	7.5	0.3	0.5	0.9	1.3	
	(kW)	0.75	1.5	2.0	3.5	5.0	0.1	0.2	0.4	0.75	
	(N·m)	3.58	7.16	9.55	16.7	23.9	0.32	0.64	1.3	2.4	
	(N·m)	10.7	21.6	28.5	50.1	71.6	0.95	1.9	3.8	7.2	
	(r/min)	2000					3000				
	(r/min)	3000			2500		4500				
	(r/min)	3450			2875		5175				
	(kW/s)	12.3	23.2	23.9	36.5	49.6	15.5	19.2	47.7	9.76	
	(A)	5.4	9.7	14	23	28	0.76	1.5	2.8	4.3	
	(A)	16.2	29.1	42	69	84	2.5	4.95	9.24	12.9	
(2, 3)	(/)	53	124	68	44	31	(4)	(4)	410	41	
() B	J (× 10 ⁻⁴ kg · m ²)	10.4 (12.4)	22.1 (24.1)	38.2 (46.8)	76.5 (85.1)	115 (123.6)	0.066 (0.074)	0.241 (0.323)	0.365 (0.447)	5.90 (6.10)	
		15 (5)									
		17 (1 : 131072p/rev)									
		(IP65)					(IP65) (6)				
		0 40 (), : -15 70 ()									
		80%RH (가), : 90%RH (가)									
		(), 가 . 가 . 가									
		1000m									
	(7)	X, Y : 24.5m/s ²			X : 24.5m/s ² Y : 49m/s ²		X, Y : 49m/s ²				
	(kg)	() B	8(10)	11(13)	16(22)	20(26)	24(30)	0.8(1.2)	1.5(2.2)	1.7(2.4)	5.0(6.2)

1. 가1
2. 가1 (/ 가) 2 1/(m+1) .(m= /) .

가 가 가 가 (W)

: <http://www.mitsubishi-automation.co.kr>

3. 600W

4. 가 15 가

5.

6. IP65 (HC-UFS -S1)


7. (bracket)



8. MR-J2S- CP(1) - S084

MR-J2S- CP(1)


HC-UFS

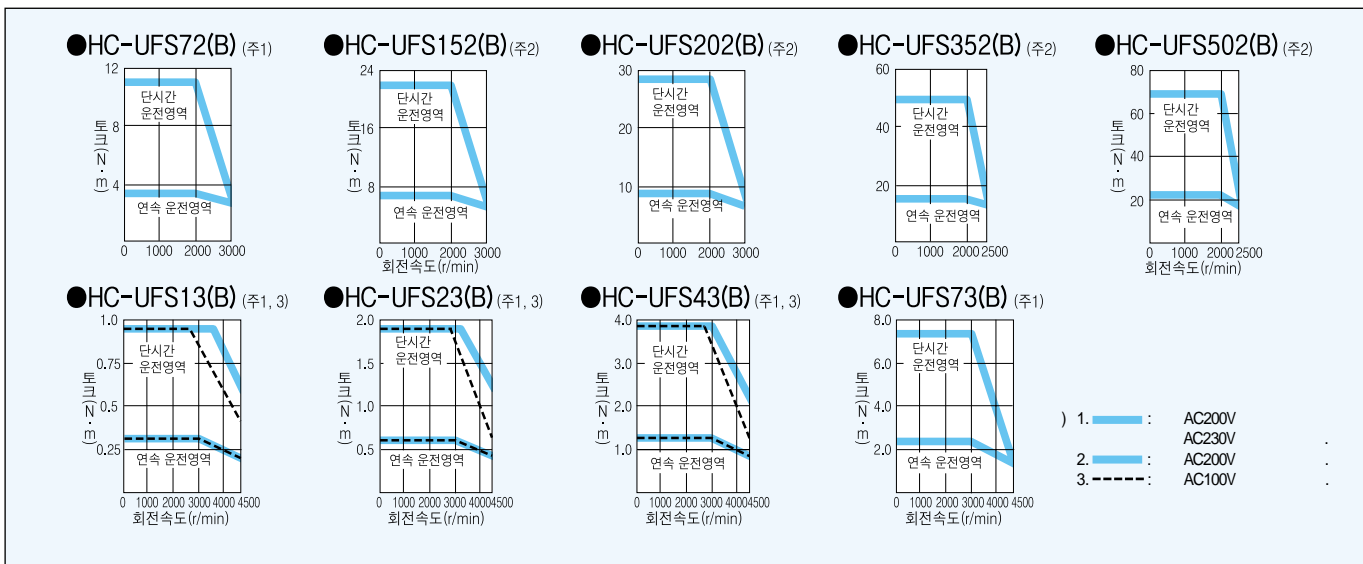

<HC-KFS, MFS, UFS 3000r/min >

[key] ... 200, 400, 750W

	(W)	T	S	R	Q	W	QK	QL	U	Y
		HC-KFS K (4) HC-MFS K	200 400	5	14h6	30	27	5	20	3
	750	6	19h6	40	37	6	25	5	3.5	M5 20
HC-UFS K	200 400	5	14h6	30	23.5	5	20	3	3	M4 15
	750	6	19h6	40	32.5	6	25	5	3.5	M5 20

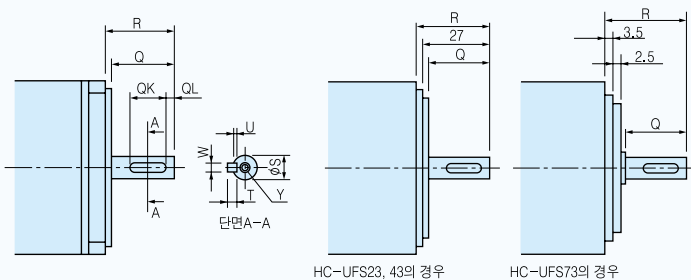


HC-UFS23, 43의 경우 HC-UFS73의 경우

(1)

(: mm)

D- ... 50, 100W

	(W)	R	QK
		HC-KFS D HC-MFS D	50, 100
HC-UFS D	100	25	17.5

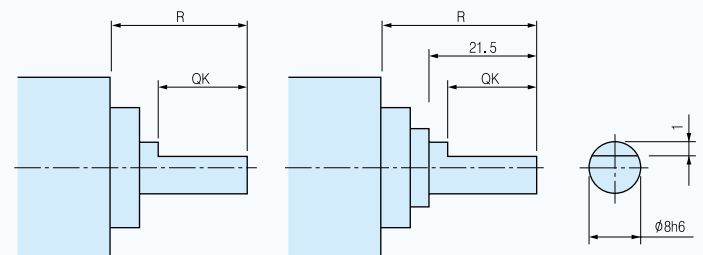

HC-MFS, HC-UFS의 경우

HC-KFS의 경우

(1)


(: mm)

<HC-SFS, LFS, RFS, UFS 2000r/min, HA-LFS >


[key]

	(kW)	S	R	Q	W	QK	QL	U	r	Y
		HC-SFS K HC-LFS K (3)	0.5~1.5 2.0~7.0	24h6 $35^{+0.01}_0$	55 79	50 75	$8^{0}_{-0.036}$ $10^{0}_{-0.036}$	36 55	5 5	$4^{+0.2}_0$ $5^{+0.2}_0$
HC-RFS K	1.0, 1.5, 2.0 3.5, 5.0	24h6 28h6	45 63	40 58	$8^{0}_{-0.036}$ $8^{0}_{-0.036}$	25 45	5 5	$4^{+0.2}_0$ $4^{+0.2}_0$	4 4	M8 M8 20 20
	HC-UFS K	0.75 1.5 2.0, 3.5, 5.0	22h6 28h6 $35^{+0.01}_0$	55 55 65	50 50 60	$6^{0}_{-0.036}$ $8^{0}_{-0.036}$ $10^{0}_{-0.036}$	42 45 50	3 5 5	$3.5^{+0.1}_0$ $4^{+0.2}_0$ $5^{+0.2}_0$	3 4 5

(1, 2)

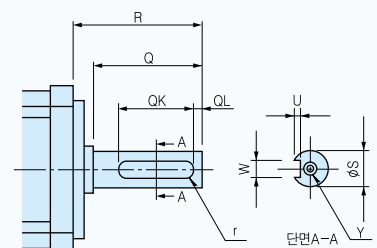

그림A

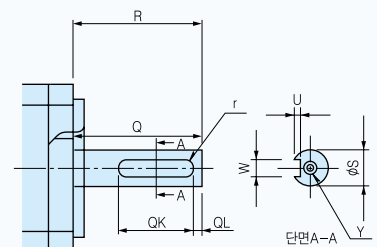

그림B

(: mm)

	(HA-LFS K)	S	R	Q	W	QK	QL	U	r	Y
		601, 6014 (), 701M (), 701M4 (), 502, 702, 11K2, 11K24	42h6	85	80	$12^{0}_{-0.04}$	70	5	$5^{+0.2}_0$	6
801, 12K1, 8014 (), 12K14 () 11K1M, 15K1M, 11K1M4, 15K1M4, 15K2, 22K2, 15K24, 22K24	55m6	110	110	$16^{0}_{-0.04}$	90	5	$6^{+0.2}_0$	8		
15K1, 20K1, 15K14, 20K14 () 22K1M, 30K1M, 22K1M4, 30K1M4, 30K2, 37K2, 30K24, 37K24	60m6	140	140	$18^{0}_{-0.04}$	128	6	$7^{+0.2}_0$	9		
25K1, 30K1, 25K14 (), 30K14 37K1M, 37K1M4, 45K1M4 45K24, 55K24	65m6	140	140	$18^{0}_{-0.04}$	128	6	$7^{+0.2}_0$	9		
37K1, 37K14, 50K1M4	80m6	170	170	$22^{0}_{-0.04}$	147	11	$9^{+0.2}_0$	11		

(1, 2)

- 1.
- 2.
3. HC-SFS121 2.0~7.0kW
4. HC-KFS46 HC-KFS410 가 .HC-KFS23K HC-KFS43K

HC - KFS G1 HC - MFS G1()

가

HC - G7()


(HC - G7K)

가

<HC - KFS, MFS, SFS, RFS >

[key]

		S	Q	W	QK	U	T	Y	
HC - KFS053G7K HC - MFS053G7K	1/5	16	28	5	25	3	5	M4 8	
	1/11								
	1/21								
	1/33								
	1/45								
HC - KFS13G7K HC - MFS13G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21								
	1/33								
	1/45								
HC - KFS23G7K HC - MFS23G7K	1/5	16	28	5	25	3	5	M4 8	
	1/11								
	1/21	25	42	8	36	4	7	M6 12	
									1/33
									1/45
HC - KFS43G7K HC - MFS43G7K	1/5	16	28	5	25	3	5	M4 8	
	1/11								
	1/21	25	42	8	36	4	7	M6 12	
									1/33
									1/45
HC - KFS73G7K HC - MFS73G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21	40	82	12	70	5	8	M10 20	
									1/33
									1/45

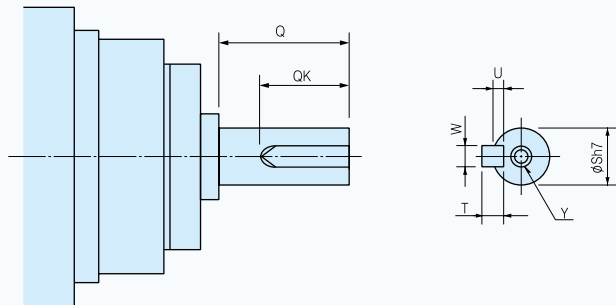

		S	Q	W	QK	U	T	Y	
HC - SFS52(4)G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21								
	1/33								
	1/45								
HC - SFS102(4)G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21	40	82	12	70	5	8	M10 20	
									1/33
									1/45
HC - SFS152(4)G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21	40	82	12	70	5	8	M10 20	
									1/33
									1/45
HC - SFS202(4)G7K	1/5	40	82	12	70	5	8	M10 20	
	1/11								
	1/21	50	82	14	70	5.5	9	M10 20	
									1/33
									1/45
HC - SFS352(4)G7K	1/5	40	82	12	70	5	8	M10 20	
	1/11								
	1/21	50	82	14	70	5.5	9	M10 20	
									1/33
									1/45
HC - SFS502(4)G7K	1/5	50	82	14	70	5.5	9	M10 20	
	1/11								
	1/21								
HC - SFS702(4)G7K	1/5	50	82	14	70	5.5	9	M10 20	
	1/11								

		S	Q	W	QK	U	T	Y	
HC - RFS103G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21								
	1/33								
	1/45								
HC - RFS153G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21	40	82	12	70	5	8	M10 20	
									1/33
									1/45
HC - RFS203G7K	1/5	25	42	8	36	4	7	M6 12	
	1/11								
	1/21	40	82	12	70	5	8	M10 20	
									1/33
									1/45
HC - RFS353G7K	1/5	40	82	12	70	5	8	M10 20	
	1/11								
	1/21	50	82	14	70	5.5	9	M10 20	
									1/33
									1/45
HC - RFS503G7K	1/5	40	82	12	70	5	8	M10 20	
	1/11								
	1/21								

) 1.

2.

3.

G7

(G7)

	HC - KFS, MFS					HC - SFS 1000 r/min			
	053B	13B	23B	43B	73B	81B	121B	201B	301B
	DC24V $\frac{0}{-10}\%$					DC24V $\frac{0}{-10}\%$			
(N · m)	0.32	0.32	1.3	1.3	2.4	8.3	43.1	43.1	43.1
(W)at 20	6.3	6.3	7.9	7.9	9	19	34	34	34
(J)/	5.6	5.6	22	22	64	400	4500	4500	4500
(J)/Hr	56	56	220	220	640	4000	45000	45000	45000
(1) () (1)	2 (4J)	2 (4J)	2 (15J)	2 (15J)	2 (32J)	2 (200J)	2 (1000J)	2 (1000J)	2 (1000J)

	HC - SFS 2000 r/min													
	52B	102B	152B	202B	352B	502B	702B	524B	1024B	1524B	2024B	3524B	5024B	7024B
	DC24V $\frac{0}{-10}\%$													
(N · m)	8.3	8.3	8.3	43.1	43.1	43.1	43.1	8.3	8.3	43.1	43.1	43.1	43.1	43.1
(W)at 20	19	19	19	34	34	34	34	19	19	19	34	34	34	34
(J)/	400	400	400	4500	4500	4500	4500	400	400	400	4500	4500	4500	4500
(J)/Hr	4000	4000	4000	45000	45000	45000	45000	4000	4000	4000	45000	45000	45000	45000
(1) () (1)	2 (200J)	2 (200J)	2 (200J)	2 (1000J)	2 (1000J)	2 (1000J)	2 (1000J)	2 (200J)	2 (200J)	2 (200J)	2 (1000J)	2 (1000J)	2 (1000J)	2 (1000J)

	HC - SFS 3000 r/min					HC - LFS					HC - RFS				
	53B	103B	153B	203B	353B	52B	102B	152B	202B	302B	103B	153B	203B	353B	503B
	DC24V $\frac{0}{-10}\%$					DC24V $\frac{0}{-10}\%$					DC24V $\frac{0}{-10}\%$				
(N · m)	8.3	8.3	8.3	43.1	43.1	8.3	8.3	8.3	43.1	43.1	6.8	6.8	6.8	16.7	16.7
(W)at 20	19	19	19	34	34	19	19	19	34	34	19	19	19	23	23
(J)/	400	400	400	4500	4500	400	400	400	4500	4500	400	400	400	400	400
(J)/Hr	4000	4000	4000	45000	45000	4000	4000	4000	45000	45000	4000	4000	4000	4000	4000
(1) () (1)	2 (200J)	2 (200J)	2 (200J)	2 (1000J)	2 (1000J)	2 (200J)	2 (200J)	2 (200J)	2 (1000J)	2 (1000J)	2 (200J)	2 (200J)	2 (200J)	2 (200J)	2 (200J)

	HA - LFS 1000 r/min						HA - LFS 1500 r/min					
	601B	801B	12K1B	6014B	8014B	12K14B	701MB	11K1MB	15K1MB	701M4B	11K1M4B	15K1M4B
	DC24V $\frac{0}{-10}\%$						DC24V $\frac{0}{-10}\%$					
(N · m)	82	160.5	160.5	82	160.5	160.5	82	160.5	160.5	82	160.5	160.5
(W)at 20	30	46	46	30	46	46	30	46	46	30	46	46
(J)/	3000	5000	5000	3000	5000	5000	3000	5000	5000	3000	5000	5000
(J)/Hr	30000	50000	50000	30000	50000	50000	30000	50000	50000	30000	50000	50000
(1) () (1)	2 (1000J)	2 (3000J)	2 (3000J)	2 (1000J)	2 (3000J)	2 (3000J)	2 (1000J)	2 (3000J)	2 (3000J)	2 (1000J)	2 (3000J)	2 (3000J)

	HA - LFS 2000 r/min						HC - UFS 2000 r/min					HC - UFS 3000 r/min			
	11K2B	15K2B	22K2B	11K24B	15K24B	22K24B	72B	152B	202B	352B	502B	13B	23B	43B	73B
	DC24V $\frac{0}{-10}\%$						DC24V $\frac{0}{-10}\%$					DC24V $\frac{0}{-10}\%$			
(N · m)	82	160.5	160.5	82	160.5	160.5	8.3	8.3	43.1	43.1	43.1	0.32	1.3	1.3	2.4
(W)at 20	30	46	46	30	46	46	19	19	34	34	34	6.3	7.9	7.9	10
(J)/	3000	5000	5000	3000	5000	5000	400	400	4500	4500	4500	5.6	22	22	64
(J)/Hr	30000	50000	50000	30000	50000	50000	4000	4000	45000	45000	45000	56	220	220	640
(1) () (1)	2 (1000J)	2 (3000J)	2 (3000J)	2 (1000J)	2 (3000J)	2 (3000J)	2 (200J)	2 (200J)	2 (1000J)	2 (1000J)	2 (1000J)	2 (4J)	2 (15J)	2 (15J)	2 (32J)

1. gap()
2.

< (G1)>

(W)	HC - KFS, HC - MFS (3)			HC - SFS2000r/min (4)						
	1/5	1/12	1/20	1/6	1/11	1/17	1/29	1/35	1/43	1/59
50	(9/44)	(49/576)	(25/484)	-	-	-	-	-	-	-
100	(9/44)	(49/576)	(25/484)	-	-	-	-	-	-	-
200	(19/96)	(25/288)	(253/5000)	-	-	-	-	-	-	-
400	(19/96)	(25/288)	(253/5000)	-	-	-	-	-	-	-
500	-	-	-	-	-	-	-	-	-	-
750	-	(525/6048)	(625/12544)	-	-	-	-	-	-	-
1000	-	-	-	-	-	-	-	-	(2)	(2)
1500	-	-	-	-	-	-	(2)	(2)	(2)	(2)
2000	-	-	-	-	-	-	(2)	(2)	(2)	(2)
3500	-	-	-	(2)	(2)	(2)	(2)	(2)	(2)	(2)
5000	-	-	-	-	(2)	(2)	(2)	(2)	(2)	-
7000	-	-	-	-	(2)	(2)	(2)	(2)	(2)	-

1. 가 (2) 가
 2. (2) 가
 3. ()
 4. HC - SFS2000r/min G1() G1H()

	HC - KFS	HC - MFS	HC - SFS 2000r/min
(1)	45 75%	45 75%	85 94%
			/
	()	()	()
	가	가	가
	60	60	40 2, (2)
(3)	50, 100, 750W : 5 200, 400W : 7	25	4
()	4500r/min	4500r/min	2000r/min

1.
 2.
 3.

< (G2)>

(W)	HC - KFS, HC - MFS				HC - SFS2000r/min					HC - RFS				
	1/5	1/9	1/20	1/29	1/5	1/9	1/20	1/29	1/45	1/5	1/9	1/20	1/29	1/45
50					-	-	-	-	-	-	-	-	-	-
100					-	-	-	-	-	-	-	-	-	-
200					-	-	-	-	-	-	-	-	-	-
400					-	-	-	-	-	-	-	-	-	-
500	-	-	-	-	-	-	-	-	-	-	-	-	-	-
750	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1500	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2000	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3500	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5000	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7000	-	-	-	-	-	-	-	-	-	-	-	-	-	-

1. 가 가

	HC - KFS	HC - MFS	HC - SFS2000r/min	HC - RFS
(1)	60 80%	60 80%	80 90%	80 90%
	()	()	()	()
	가	가	가	가
	3	3	3	3
(3)	50, 100, 750W : 5 200, 400W : 7	25	5	5
()	4500r/min	4500r/min	0.5~1.5kW : 3000r/min 2~3.5kW : 2500r/min 5~7kW : 2000r/min	4000r/min

1.
 2.

<
<(G5)>
(G7)>

(W)	HC - KFS, HC - MFS					HC - SFS2000r/min					HC - RFS				
	1/5	1/11	1/21	1/33	1/45	1/5	1/11	1/21	1/33	1/45	1/5	1/11	1/21	1/33	1/45
50						-	-	-	-	-	-	-	-	-	-
100						-	-	-	-	-	-	-	-	-	-
200						-	-	-	-	-	-	-	-	-	-
400						-	-	-	-	-	-	-	-	-	-
500	-	-	-	-	-										
750						-	-	-	-	-	-	-	-	-	-
1000	-	-	-	-	-										
1500	-	-	-	-	-										
2000	-	-	-	-	-										
3500	-	-	-	-	-				-	-					-
5000	-	-	-	-	-			-	-	-				-	-
7000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

) 1. 가 . 가 .

	HC - KFS	HC - MFS	HC - SFS2000r/min	HC - RFS
(1)	58~87%(2)	58~87%(2)	77~92%	71 90%
	()	()	()	()
	가	가	가	가
	3	3	3	3
(3) ()	50, 100, 750W : 10 200, 400W : 14	25	10	5
()	4500r/min	4500r/min	0.5~1.5kW : 3000r/min 2, 3.5kW : 2500r/min 5, 7kW : 2000r/min	4500r/min

) 1.


2. HC - KFS053, HC - MFS053 22~41% .

3.

MR-J2S-700A(4)/CP/CL

(MR-J2S-A, CP, CL)

- QD75P
- QD75D
- AD75P
- A1SD75P
- FX2N - 20GM
- FX2N - 10GM
- FX2N - 10PG
- FX2N - 1PG

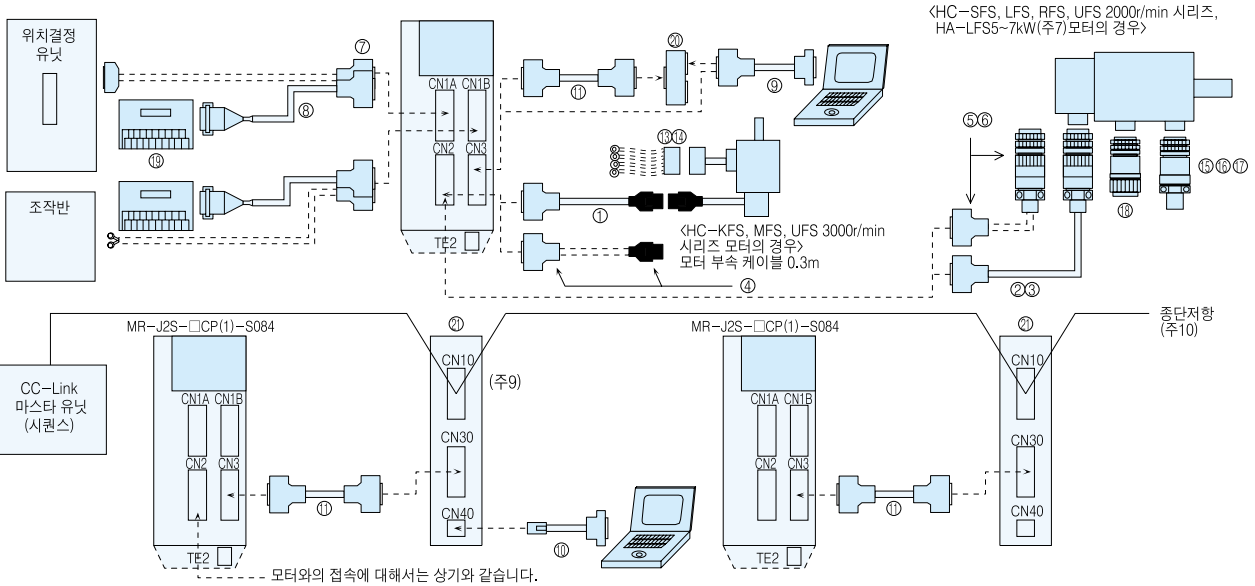


가	CN2	가	가	가			
				가	가		
가	CN2	가	〈HC - KFS, MFS, UFS3000r/min〉	MR - JCCBL M - H : (1) 2, 5, 10, 20, 30, 50m	IP20 10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (3)	(AMP) 1 - 172161 - 9 () () 170359 - 1 () () MTI - 0002 () ()	
			MR - JCCBL M - L : (1) 2, 5, 10, 20, 30m	IP20			
		가	〈HC - SFS, LFS, RFS UFS2000r/min, HA - LFS〉	MR - JHSCBL M - H : (1) 2, 5, 10, 20, 30, 50m	IP20	10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (3)	(DDK) MS3057 - 12A () () MS3106B20 - 29S () ()
			MR - JHSCBL M - L : (1) 2, 5, 10, 20, 30m	IP20			
		가	(4)	MR - ENCBL M - H : (1, 6) 2, 5, 10, 20, 30, 50m	IP65 IP67	(DDK) CE02 - 20BS - S () ()	(DDK) MS3106A20 - 29S (D190) () () (DDK) CE3057 - 12A - 3 (D265) () ()
		가	가	〈HC - KFS, MFS, UFS3000r/min〉	MR - J2CNM	IP20	10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (3)
가	CN2	가	〈HC - SFS, LFS, RFS UFS2000r/min, HA - LFS〉	MR - J2CNS	IP20	10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (3)	(DDK) MS3057 - 12A () () MS3106B20 - 29S () ()
		가	MR - ENCNS	IP65 IP67	(DDK) MS3106A20 - 29S (D190) () () (DDK) CE02 - 20BS - S () ()	(DDK) CE3057 - 12A - 3 (D265) () ()	
가	CN1A, CN1B	가	CN1	MR - J2CN1 (5)	-	10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (3)	
		가		MR - J2TBL M : 0.5, 1m	-	HIF3BA - 20D - 2.54R () ()	(3M) 10120 - 3000VE () () 10320 - 52F0 - 008 () (3)

1. -H, -L . . . -H
2. AMP 172161-1() 170363-1() 가
3. 10120-6000EL(), 10320-3210-000 () 가
4. MR-JHSCBL M-H, -L IP65
5. RS-422 MR-J2CN1
6.
7. HA-LFS601, 6014, 701M, 701M4
8. CC-Link 0.5m
9. CN10 .CC-Link CN10
10. CC-Link







MR-J2S-11KA(4)~MR-J2S-22KA(4)

(MR-J2S-A)

- QD75P
- QD75D
- AD75P
- A1SD75P
- FX2N-20GM
- FX2N-10GM
- FX2N-10PG
- FX2N-1PG

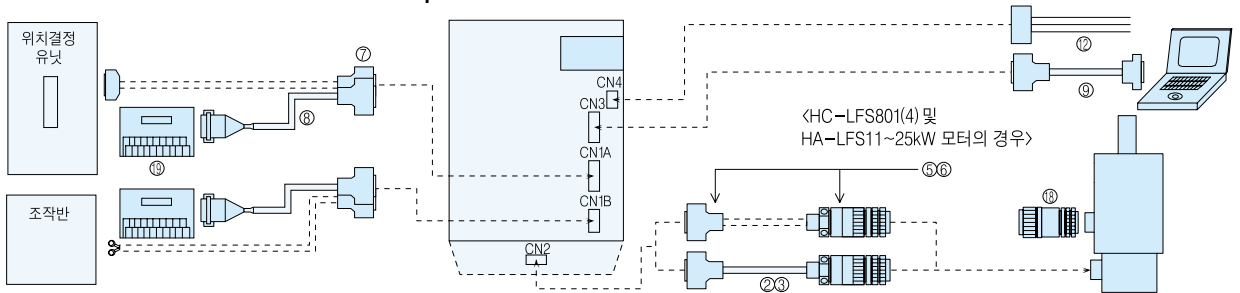

CN3		MR - CPCATCBL3M 3m	-	RS-232C (3M)) 10120-3000VE ()) 10320-52F0-008 () (3)	DOS/V DE-9SF-N()) DE-C1-J6-S6())	
		MR - JRPCATCBL3M 3m	-	5557-04R-210() (molex) 5556()	DOS/V DE-9SF-N()) DE-C1-J6-S6())	
	- CC - Link	MR - J2HBUS M : 0.5, 1, 5m (8)	-	10120-3000VE () (3M) 10320-52F0-008 () (3)	10120-3000VE () (3M) 10320-52F0-008 () (3)	
CN4	CN4	MR - H3CBL1M 1m	-	171822-4 () (AMP)) 11kW	
가	HC - KFS, MFS, UFS3000r/min	MR - PWCNK1	IP20	5559-04P-210 (molex) 5558PBT3L (molex) (AWG16)		
	HC - KFS, MFS, UFS3000r/min	MR - PWCNK2	IP20	5559-06P-210 (molex) 5558PBT3L (molex) (AWG16)		
	HC - SFS81 HC - SFS52, 102, 152, 524, 1024, 1524 HC - SFS53, 103, 153 HC - LFS52, 102, 152 HC - RFS103, 153, 203 HC - UFS72, 152	MR - PWCNS1 ()	IP65 IP67	CE05-6A24-23SD-B-BSS (DDK) CE3057-12A-1 (D265) (DDK)		
	HC - SFS121, 201, 301 HC - SFS202, 352, 502, 2024, 3524, 5024 HC - SFS203, 353 HC - LFS202, 302 HC - RFS353, 503 HA - LFS502 HC - UFS202, 352, 502	MR - PWCNS2 ()	IP65 IP67	CE05-6A24-10SD-B-BSS (DDK) CE3057-16A-2 (D265) (DDK)		
	HC - SFS702, 7024 HA - LFS702	MR - PWCNS3 ()	IP65 IP67	CE05-6A32-17SD-B-BSS (DDK) CE3057-20A-1 (D265) (DDK)		
	HC - SFS121B, 201B, 301B HC - SFS202B, 352B, 502B, 702B, 2024B, 3524B, 5024B, 7024B HC - SFS203B, 353B HC - LFS202B, 302B HA - LFS601B, 801B, 12K1B, 6014B, 8014B, 12K14B HA - LFS701MB, 11K1MB, 15K1MB, 701M4B, 11K1M4B, 15K1M4B HA - LFS11K2B, 15K2B, 22K2B, 11K24B, 15K24B, 22K24B HC - UFS202B, 352B, 502B	MR - BKCN ()	IP65 IP67	MS3106A10SL-4S(D190) (DDK) YSO10-5-8 () ()		
		MR - TB20	-			
		MR - J2CN3TM	-			
	CC - Link	MR - J2S - T01	-	MR - J2S - CP (1) - S084		

C N 3		MR - CPCATCBL3M 3m	-	<p>RS - 232C (3M) 10120 - 3000VE () 10320 - 52F0 - 008 () (2)</p> <p>DOS/V DE - 9SF - N () DE - C1 - J6 - S6 ()</p> 
C N 4	CN4	MR - H3CBL1M 1m	-	<p>171822 - 4 (AMP)</p> 
C N 5 A	CN5	MR - J2HBUS M : 0.5, 1m (6)	-	<p>10120 - 3000VE (3M) 10320 - 52F0 - 008 () (2)</p> <p>10120 - 3000VE (3M) 10320 - 52F0 - 008 () (2)</p> 
C N 5 B		MR - A - TM	-	
	CN1	MR - HP4CN1	-	<p>10114 - 3000VE (3M) 10314 - 52F0 - 008 ()</p> 
		MR - TB20	-	


MR-J2S-700B(4)

(MR-J2S-B)

- A171SH
- A172SH
- A173UH
- A273UH
- AD75M
- A1SD75M

- QD75M

- Q172 (6)
- Q173 (6)

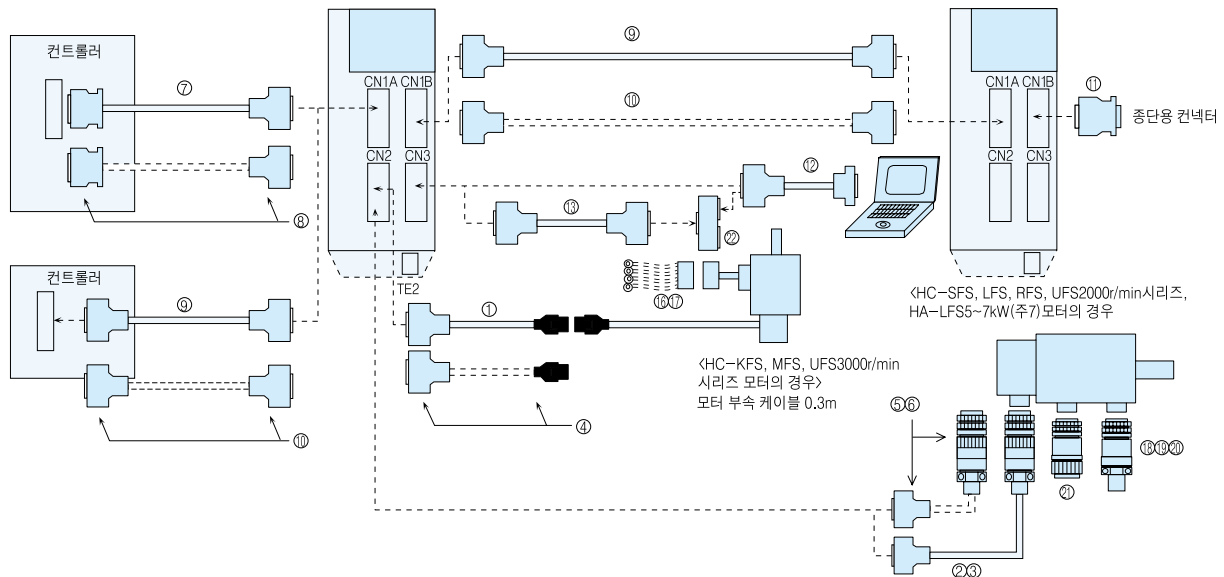


가	CN 2	모터 시리즈	모델명	방수 등급	케이블 사양	
					케이블 번호	연속 전류 (AMP)
가	CN 2	<HC-KFS, MFS, UFS3000r/min>	MR-JCCBL M-H	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	1-172161-9 (AMP) () 170359-1 () () MTI-0002 () ()
			MR-JCCBL M-L	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	MS3057-12A (DDK) () MS3106B20-29S () ()
	<HC-SFS, LFS, RFS, UFS2000r/min, HA-LFS>	MR-JHSCBL M-H	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	MS3057-12A (DDK) () MS3106B20-29S () ()	
		MR-JHSCBL M-L	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	MS3057-12A (DDK) () MS3106B20-29S () ()	
	MR-ENCBL M-H	IP65 IP67	10120-3000VE () (3M) () 10320-52F0-008 () (3)	CE02-20BS-S (DDK) () MS3106A20-29S (D190) (DDK) () CE3057-12A-3 (D265) (DDK) ()		
	<HC-KFS, MFS, UFS3000r/min>	MR-J2CNM	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	1-172161-9 (AMP) () 170359-1 () () MTI-0002 () () (2)	
가	CN 2	<HC-SFS, LFS, RFS, UFS2000r/min, HA-LFS>	MR-J2CNS	IP20	10120-3000VE () (3M) () 10320-52F0-008 () (3)	MS3057-12A () () MS3106B20-29S () ()
			MR-ENCNS	IP65 IP67	MS3106A20-29S (D190) (DDK) () 10120-3000VE () (3M) () 10320-52F0-008 () (3)	CE02-20BS-S (DDK) () CE3057-12A-3 (D265) (DDK) ()
가	CN 1 A	-	MR-J2HBUS M-A	-	PCR-S20FS () () PCR-LS20LA1 () ()	10120-3000VE () (3M) () 10320-52F0-008 () (3)
			MR-J2CN1-A	-	PCR-S20FS () () PCR-LS20LA1 () ()	10120-3000VE () (3M) () 10320-52F0-008 () (3)

1. -H, -L
2. AMP 172161-1()
3. 170363-1() 가 10120-6000EL(), 10320-3210-000()가
4. MR-JHSCBL M-H, -L IP65
5. Q
6. Q172, Q173 (L()-03010)가
7. HA-LFS601, 6014, 701M, 701M4

MR-J2S-11KB(4)~MR-J2S-22KB(4)

(MR-J2S-B)

- A171SH
- A172SH
- A173UH
- A273UH
- AD75M
- A1SD75M
- QD75M
- Q172
- Q173 (6)

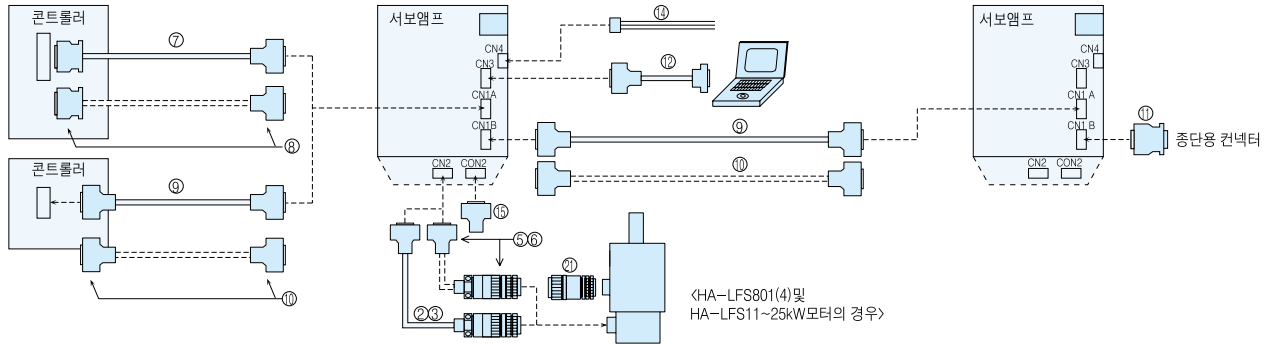

구분	구분	구분	구분	구분	구분	구분	구분	구분
CN1A, CN1B	-	MR-J2HBUS M : 0.5, 1, 5m	-	10120-3000VE (3M) 10320-52F0-008 () (3)	10120-3000VE (3M) 10320-52F0-008 () (3)			
	CN1	MR-J2CN1	-	10120-3000VE (3M) 10320-52F0-008 () (3)	10120-3000VE (3M) 10320-52F0-008 () (3)			
CN1B		MR-A-TM	-					
CN3		MR-CPCATCBL3M 3m	-	RS-232C (3M) 10120-3000VE () 10320-52F0-008 () (3)	DOS/V () DE-9SF-N () DE-C1-J6-S6 ()			
		MR-J2HBUS M : 0.5, 1, 5m	-	10120-3000VE (3M) 10320-52F0-008 () (3)	10120-3000VE (3M) 10320-52F0-008 () (3)			
CN4	CN4	MR-H3CBL1M 1m	-	171822-4 (AMP) () 11kW				
CON2	CON2	MR-J2CMP2	-	10126-3000VE (3M) 10326-52F0-008 ()				
가	HC-KFS, MFS, UFS3000r/min	MR-PWCNK1	IP20	(molex) 5559-04P-210	(molex) 5558PBT3L (AWG16)			
	HC-KFS, MFS, UFS3000r/min	MR-PWCNK2	IP20	(molex) 5559-06P-210	(molex) 5558PBT3L (AWG16)			
	HC-SFS81 HC-SFS52, 102, 152, 524, 1024, 1524 HC-SFS203, 353 HC-LFS52, 102, 152 HC-RFS103, 153, 203 HC-UFS72, 152	MR-PWCNS1 ()	IP65 IP67	(DDK) CE05-6A22-23SD-B-BSS	(DDK) CE3057-12A-2 (D265)			
	HC-SFS121, 201, 301 HC-SFS202, 352, 502, 2024, 3524, 5024 HC-SFS203, 353 HC-LFS202, 302 HC-RFS353, 503 HA-LFS502 HC-UFS202, 352, 502	MR-PWCNS2 ()	IP65 IP67	(DDK) CE05-6A24-10SD-B-BSS	(DDK) CE3057-16A-2 (D265)			
	HC-SFS702, 7024 HA-LFS702	MR-PWCNS3 ()	IP65 IP67	(DDK) CE05-6A32-17SD-B-BSS	(DDK) CE3057-20A-1 (D265)			
	HC-SFS121B, 201B, 301B HC-SFS202B, 352B, 502B, 702B, 2024B, 3524B, 5024B, 7024B HC-SFS203B, 353B HC-LFS202B, 302B HA-LFS601B, 801B, 12K1B, 6014B, 8014B, 12K14B HA-LFS701MB, 11K1MB, 15K1MB, 701M4B, 11K1M4B, 15K1M4B HA-LFS11K2B, 15K2B, 22K2B, 11K24B, 15K24B, 22K24B HC-UFS202B, 352B, 502B	MR-BKCN ()	IP65 IP67	(DDK) MS3106A10SL-4S (D190)	YSO10-5-8 () ()			
		MR-J2CN3TM	-				11kW	MR-J2S-B


MR-J2S-30KB(4)

(MR-J2S-B)

- A171SH
- A172SH
- A173UH
- A273UH
- AD75M
- A1SD75M








- QD75M

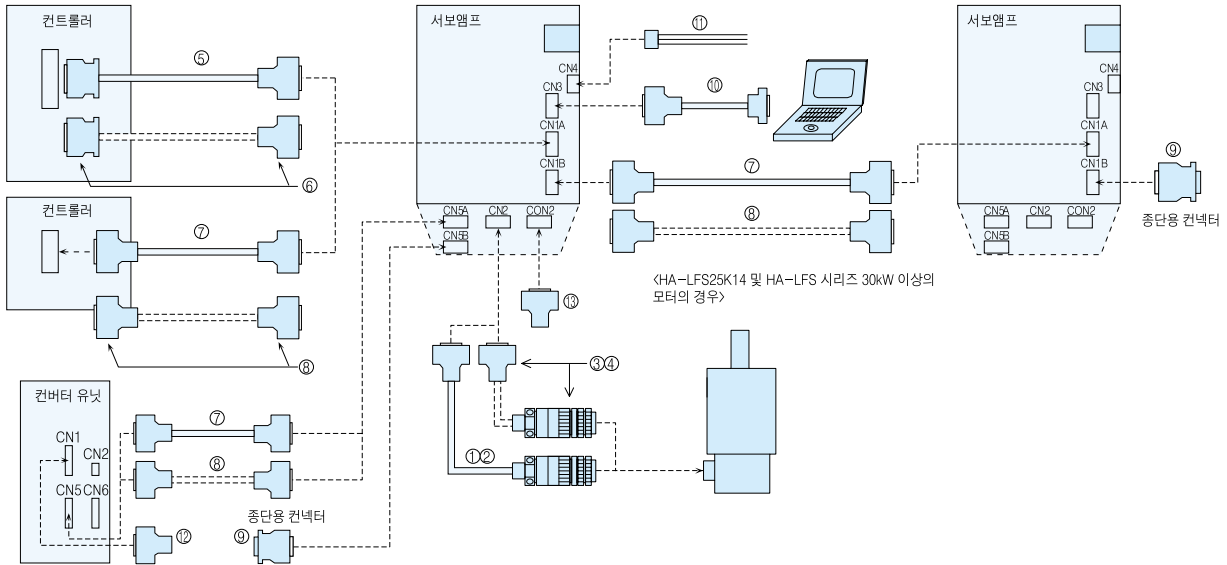- Q172 (5)
- Q173 (5)






가	CN2	HA-LFS >	(3)	MR - JHSCBL M - H	IP20	10120 - 3000VE (3M) () 10320 - 52F0 - 008 () (2)	MS3057 - 12A (DDK) () MS3106B20 - 29S ()
				MR - JHSCBL M - L	IP20	(3M) () (2)	(DDK) () (D190)
가	CN2	HA-LFS >	(3)	MR - ENCBL M - H	IP65 IP67	(3M) () (2)	(DDK) () (D265)
				MR - J2CNS	IP20	(3M) () (2)	(DDK) () ()
가	CN2	HA-LFS >	(3)	MR - ENCNS	IP65 IP67	(DDK) () (D190)	(DDK) () ()
				MR - J2HBUS M - A	-	PCR - S20FS () () PCR - LS20LA1 () ()	(3M) () (2)
가	CN1A	-	-	MR - J2CN1 - A	-	PCR - S20FS () () PCR - LS20LA1 () ()	(3M) () (2)

1. -H, -L
2. 10120 - 6000EL(), 10320 - 3210 - 000()가
3. MR - JHSCBL M - H, -L IP65
4. Q172, Q173
5. Q172, Q173 (L) - (03010)가
6. CN5 1m

CN1 A, CN1 B, CN5 A,	CN5	MR - J2HBUS M 0.5, 1, 5m (6)	-	<p>10120 - 3000VE () (3M) 10320 - 52F0 - 008 () (2)</p> <p>10120 - 3000VE () (3M) 10320 - 52F0 - 008 () (2)</p> 
	CN1 CN5	MR - J2CN1	-	 <p>10120 - 3000VE () (3M) 10320 - 52F0 - 008 () (2)</p>
CC NN 1 5 B,B		MR - A - TM	-	
CN3		MR - CPCATCBL3M 3m	-	<p>RS - 232C () (3M) 10120 - 3000VE () () 10320 - 52F0 - 008 () (2)</p> <p>DOS/V () () DE - 9SF - N () () DE - C1 - J6 - S6 () ()</p> 
CN4	CN4	MR - H3CBL1M 1m	-	<p>171822 - 4 () (AMP)</p> 
	CN1	MR - HP4CN1	-	 <p>10114 - 3000VE () (3M) 10314 - 52F0 - 008 () ()</p>
CON2	CON2	MR - J2CMP2	-	 <p>10126 - 3000VE () (3M) 10326 - 52F0 - 008 () ()</p>

MELSERVO J2 Super





DDK() ()/molex() ()

		DDK()		DDK()	
			(mm)		(mm)
HC - SFS81 HC - SFS52, 102, 152, 524, 1024, 1524 HC - SFS53, 103, 153 HC - LFS52, 102, 152 HC - RFS103, 153, 203 HC - UFS72, 152	IP65, IP67 EN	CE05 - 6A22 - 23SD - B - BSS	9.5~13	CE3057 - 12A - 2(D265)	
		CE05 - 8A22 - 23SD - B - BAS	12.5~16	CE3057 - 12A - 1(D265)	
		MS3106B22 - 23S	9.5~13	CE3057 - 12A - 2(D265)	
		MS3108B22 - 23S	12.5~16	CE3057 - 12A - 1(D265)	
HC - SFS121, 201, 301 HC - SFS202, 352, 502, 2024, 3524, 5024 HC - SFS203, 353 HC - LFS202, 302 HC - RFS353, 503 HA - LFS502 HC - UFS202, 352, 502	IP65, IP67 EN	CE05 - 6A24 - 10SD - B - BSS	15.9	MS3057 - 12A	
		CE05 - 8A24 - 10SD - B - BAS	()	MS3057 - 12A	
		MS3106B24 - 10S	13~15.5	CE3057 - 16A - 2(D265)	
		MS3108B24 - 10S	15~19.1	CE3057 - 16A - 1(D265)	
		CE05 - 6A32 - 17SD - B - BSS	13~15.5	CE3057 - 16A - 2(D265)	
		CE05 - 8A32 - 17SD - B - BAS	15~19.1	CE3057 - 16A - 1(D265)	
HC - SFS702, 7024 HA - LFS702	IP65, IP67 EN	MS3106B32 - 17S	15.9, 19.1	MS3057 - 16A	
		MS3108B32 - 17S	()	MS3057 - 16A	
		CE05 - 6A32 - 17SD - B - BSS	22~23.8	CE3057 - 20A - 1(D265)	
		CE05 - 8A32 - 17SD - B - BAS	22~23.8	CE3057 - 20A - 1(D265)	
		MS3106B32 - 17S	19.1, 23.8	MS3057 - 20A	
		MS3108B32 - 17S	()	MS3057 - 20A	



) EN

		Molex()	
		B	
HC - KFS, MFS, UFS3000 r/min	EN	B	5559 - 04P - 210 5558PBT3L (AWG16)
		B	5559 - 06P - 210 5558PBT3L (AWG16)




DDK() ()

		DDK()		DDK()	
			(mm)		(mm)
HC - SFS, LFS, RFS, HA - LFS, HC - UFS2000r/min	IP65, IP67	MS3106A20 - 29S(D190)	CE02 - 20BS - S	6.8~10	CE3057 - 12A - 3(D265)
			CE - 20BA - S		




		DDK()		DDK()	
			(mm)		(mm)
HC - SFS, LFS, RFS, HA - LFS, HC - UFS2000r/min		MS3106B20 - 29S	15.9	MS3057 - 12A	
		MS3108B20 - 29S	()		



DDK() () / () / ()

		DDK()		DDK()	
			(mm)		(mm)
HC - SFS121B, 201B, 301B HC - SFS202B, 352B, 502B, 702B, 2024B, 3524B, 5024B, 7024B HC - SFS203B, 353B HC - LFS202B, 302B HC - UFS202B, 352B, 502B	IP65 IP67	MS3106A10SL - 4S(D190)	4~8	ACS - 08RL - MS10F	()
			8~12	ACS - 12RL - MS10F	()
			5~8.3	YSO10 - 5~8	()
			4~8	ACA - 08RL - MS10F	()
			8~12	ACA - 12RL - MS10F	()
			5~8.3	YLO10 - 5~8	()



		DDK()		DDK()	
			(mm)		(mm)
HC - SFS121B, 201B, 301B HC - SFS202B, 352B, 502B, 702B, 2024B, 3524B, 5024B, 7024B HC - SFS203B, 353B HC - LFS202B, 302B HA - LFS601B, 801B, 12K1B, 6014B, 8014B, 12K14B HA - LFS701MB, 11K1MB, 15K1MB, 701M4B, 11K1M4B, 15K1M4B HA - LFS11K2B, 15K2B, 22K2B, 11K24B, 15K24B, 22K24B HC - UFS202B, 352B, 502B		MS3106A10SL - 4S	5.6	MS3057 - 4A	()

11kW

가


DBU - 11K	MR - J2S - 11KA/B	A
DBU - 15K	MR - J2S - 15KA/B	
DBU - 22K	MR - J2S - 22KA/B	
DBU - 11K - 4	MR - J2S - 11KA4/B4	B
DBU - 22K - 4	MR - J2S - 15KA4/B4 MR - J2S - 22KA4/B4	

DBU - 37K	MR - J2S - 30KA/B MR - J2S - 37KA/B	C
DBU - 55K - 4	MR - J2S - 30KA4/B4 MR - J2S - 37KA4/B4	
	MR - J2S - 45KA4/B4 MR - J2S - 55KA4/B4	

(: mm)


단자대 (GND) a b 13 14 U V W
나사사이즈 : M3.5 나사사이즈 : M4

	A	B	C	D	E	F	G	(kg)	(mm)
DBU - 11K	200	190	140	20	5	170	163.5	2	5.5(AWG10)
DBU - 15K	250	238	150	25	6	235	228	6	5.5(AWG10)
DBU - 22K									

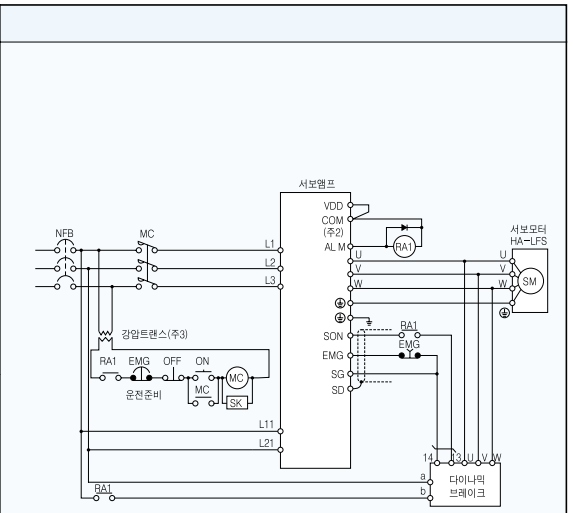


TE1 a b 13 14
나사사이즈 : M3,5
TE2 U V W
나사사이즈 : M4

	(kg)	(mm)	
		U, V, W	U, V, W
DBU - 11K - 4	6.7	5.5 (AWG10)	2 (AWG14)
DBU - 22K - 4			

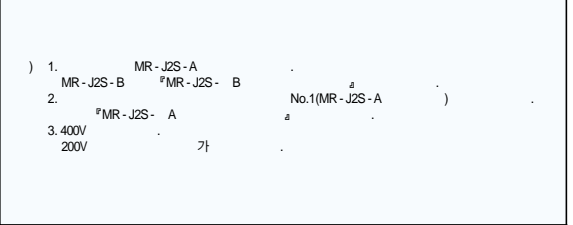

TE1 U V W
나사사이즈 : M5
TE2 a b 13 14
나사사이즈 : M3,5



	(kg)	(mm)	
		U, V, W	U, V, W
DBU - 37K	8	14	2
DBU - 55K - 4	11	(AWG6)	(AWG14)

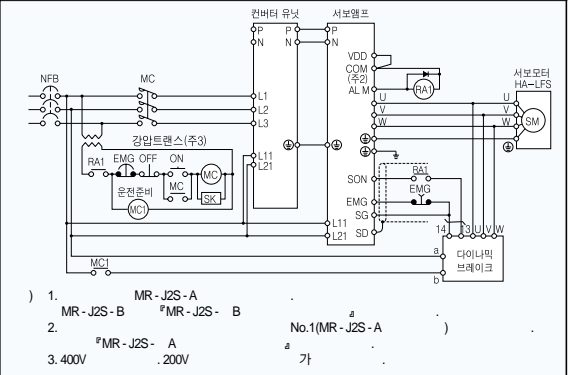

(MR - TB20)

(PS7DW - 20V14B - F)

CN1

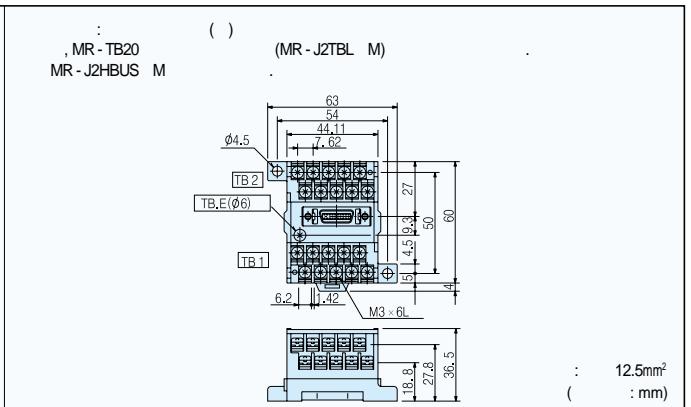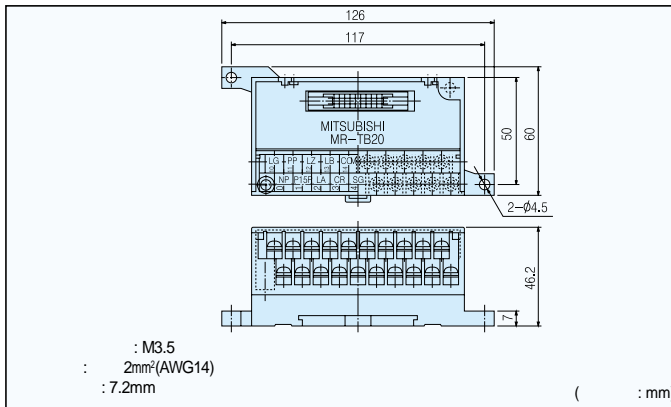

(MR-J2S-)	/ (W)	() (W)					
		GRZG400-					
		2 x 4	1 x 5	0.8 x 5	5 x 4	2.5 x 5	2 x 5
10A(1)/B(1)/CP(1)/CL(1)	-	-	-	-	-	-	-
20A(1)/B(1)/CP(1)/CL(1)	10	-	-	-	-	-	-
40A(1)/B(1)/CP(1)/CL(1)	10	-	-	-	-	-	-
60A/B/CP/CL	10	-	-	-	-	-	-
70A/B/CP/CL(-U)	20	-	-	-	-	-	-
100A/B/CP/CL	20	-	-	-	-	-	-
200A/B/CP/CL	100	-	-	-	-	-	-
350A/B/CP/CL	100	-	-	-	-	-	-
500A/B/CP/CL	130	-	-	-	-	-	-
700A/B/CP/CL	170	-	-	-	-	-	-
11KA/B	-	500(800)	-	-	-	-	-
15KA/B	-	-	850(1300)	-	-	-	-
22KA/B	-	-	-	850(1300)	-	-	-
30KA/B	-	-	-	-	-	-	-
37KA/B	-	-	-	-	-	-	-
60A4/B4	30	-	-	-	-	-	-
100A4/B4	100	-	-	-	-	-	-
200A4/B4	100	-	-	-	-	-	-
350A4/B4	100	-	-	-	-	-	-
500A4/B4	130	-	-	-	-	-	-
700A4/B4	170	-	-	-	-	-	-
11KA4/B4	-	-	-	-	500(800)	-	-
15KA4/B4	-	-	-	-	-	850(1300)	-
22KA4/B4	-	-	-	-	-	-	850(1300)
30KA4/B4	-	-	-	-	-	-	-
37KA4/B4	-	-	-	-	-	-	-
45KA4/B4	-	-	-	-	-	-	-
55KA4/B4	-	-	-	-	-	-	-

1. W W
2. () (1.0m³/min, 92 x 2) No.0(MR-J2S-A) No.2(MR-J2S-B)
3. MR-RB137 MR-RB138-4 3

MR-RB032, MR-RB12

	LA	LB	LC	LD	(kg)
MR-RB032	30	15	119	99	0.5
MR-RB12	40	15	169	149	1.1

단자 배열: TE1, G3, G4, P, C

단자나사: M3

MR-RB30, MR-RB31, MR-RB32

	(kg)
MR-RB30	2.9
MR-RB31	2.9
MR-RB32	2.9

단자 배열: P, C, G3, G4

단자나사: M4

<MR-J2S-350 >

서보오피스: 반드시 P-D간의 선을 제거하십시오.

회생용선: G3, G4 (주2)

팬 (주1)

1. MR-RB50 (1.0m³/min, 92) (MC)

MR-RB50, MR-RB51

	(kg)
MR-RB50	5.6
MR-RB51	5.6

단자 배열: P, C, G3, G4

단자나사: M4

<MR-J2S-500, 700 >

서보오피스: 반드시 서보오피스 내장 회생저항기의 배선(P-C2)을 제거하십시오.

회생용선: G3, G4 (주2)

팬 (주1)

1. MR-RB50, MR-RB51 (1.0m³/min, 92) (MC)

GRZG400-2, GRZG400-1, GRZG400-0.8 : (1.5)

	(W)	(W)	()	(kg/)
GRZG400-2	4	500	8(2 x 4)	0.8
GRZG400-1	5	850	5(1 x 5)	0.8
GRZG400-0.8	5	850	4(0.8 x 5)	0.8

단락 바를 떼어내지 마십시오.

각 저항기 사이는 70mm 이상 간격을 두십시오.

직렬접속

팬 (1.0m³/min, □92×2대)

트위스트


서보오피스: MR-J2S-11KA/B ~22KA/B

		/ (W)																				()				
		MR-RB																								
		032	12	30	31	32	50	51	65	66	67	139	137	1L-4	3M-4	3H-4	3G-4	34-4	5H-4	5G-4	54-4	6B-4	60-4	6K-4	136-4	138-4
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	x	300	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	100	x	x	300	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	300	x	x	500	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	300	x	x	500	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	300	x	x	500	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	x	300	x	x	500	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x	x	500(800)	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x	x	x	850(1300)	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x	x	x	x	850(1300)	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	x	x	x	x	x	x	x	x	x	x	x	x	1.3(3)
x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	x	x	x	x	x	x	x	x	x	x	x	x	1.3(3)
x	x	x	x	x	x	x	x	x	x	x	x	x	x	100	x	x	x	x	x	x	x	x	x	x	x	270
x	x	x	x	x	x	x	x	x	x	x	x	x	x	300	x	x	x	x	x	x	x	x	x	x	x	120
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	300	x	x	x	x	500	x	x	x	x	x	80
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	300	x	x	500	x	x	x	x	x	47
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	300	x	500	x	x	x	x	x	47
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	300	x	x	500	x	x	x	26
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	500(800)	x	x	x	20
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	850(1300)	x	x	12.5
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	10
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	5(3)
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	5(3)
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	5(3)
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	1300	3900	5(3)

MR-RB65, MR-RB66, MR-RB67 (1.5)

TE1 <단자배열> G4 G3 C P 단자나사 사이즈 : M5

	(M)	(W)		(kg)
MR-RB65	500	800	GRZG400-2 x 4	10
MR-RB66	850	1300	GRZG400-1 x 5	11
MR-RB67	850	1300	GRZG400-0.8 x 5	11

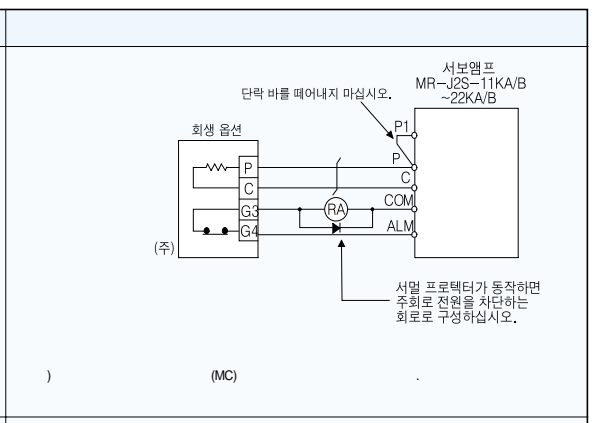


MR-RB139, MR-RB137

TE1 <단자배열> R S G4 G3 C P 단자나사 사이즈 : M5

	(M)	(W)	(kg)
MR-RB139	1300		10
MR-RB137	3900(3)		11


MR-RB137 1 3 가

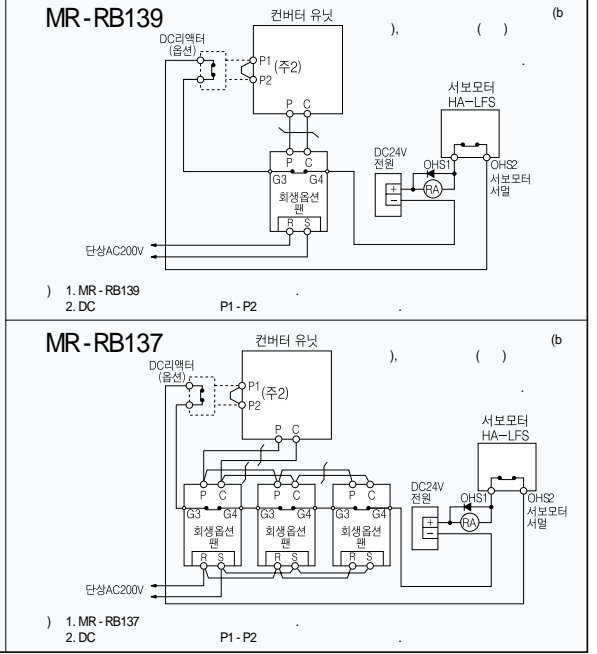


- MR-J2S-11KA/B~22KA/B (MR-J2S- K -PX)
- 100
- (5m)
- (1.0m³/min, 92 x 2) No.0(MR-J2S-A) No.2(MR-J2S-B)
- 가

(: mm)

MR-RB1L-4

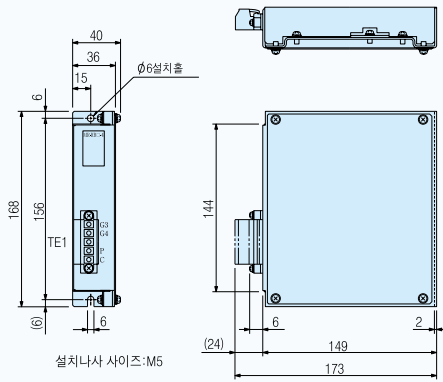


MR-J2S-200A4/B4




1. MR-RB5H-4 (1.0m/min, 92)
2. (MC)

MR-J2S-350A4/B4~700A4/B4

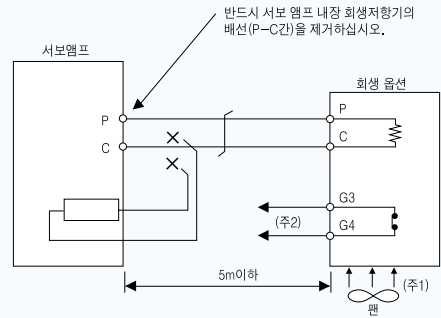


1. MR-RB5G-4, MR-RB54-4 (1.0m/min, 92)
2. (MC)

MR-RB3M-4, MR-RB3H-4, MR-RB3G-4, MR-RB34-4

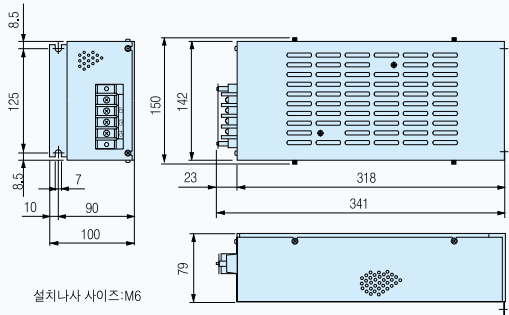

MR-RB5H-4, MR-RB5G-4, MR-RB54-4

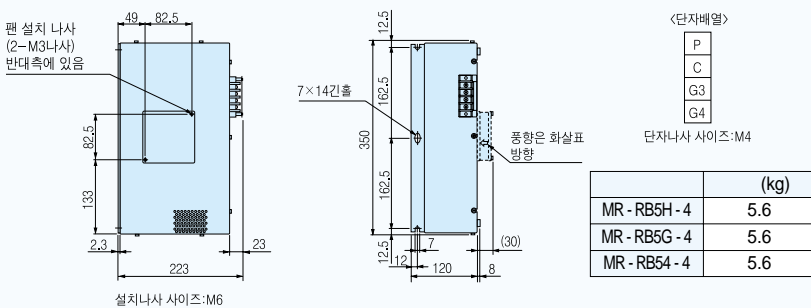


(: mm)

GRZG400-5 , GRZG400-2.5 , GRZG400-2 : (1,5)

설치나사 사이즈: M8

		(W)	(W)	()	(kg/)
GRZG400-5	4	500	800	20(5 x 4)	0.8
GRZG400-2.5	5	850	1300	12.5(2.5 x 5)	0.8
GRZG400-2	5	850	1300	10(2 x 5)	0.8

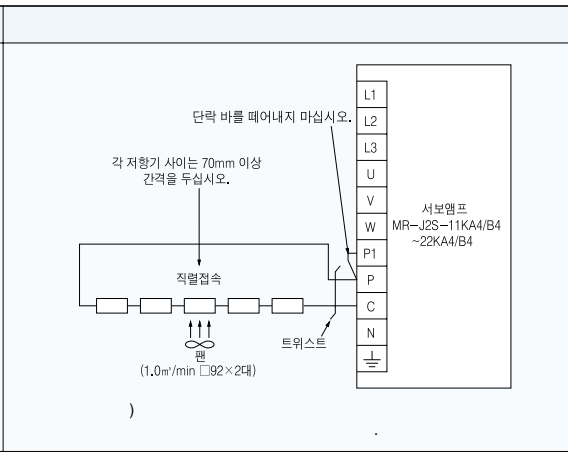


MR-RB6B-4, MR-RB60-4, MR-RB6K-4 (1,5)

설치나사 사이즈: M8

<단자배열>
TE1 G4 G3 C P
단자나사 사이즈: M5

	(W)	(W)		(kg)
MR-RB6B-4	500	800	GRZG400-5 x 4	10
MR-RB60-4	850	1300	GRZG400-2.5 x 5	11
MR-RB6K-4	850	1300	GRZG400-2 x 5	11

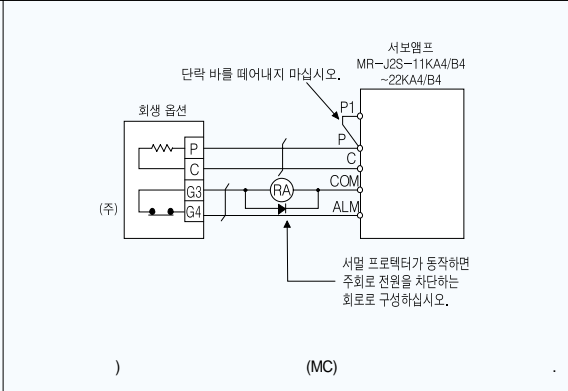



MR-RB136-4, MR-RB138-4

설치나사 사이즈: M8

<단자배열>
R400 S400 G4 G3 C P
단자나사 사이즈: M5

	(W)	(kg)
MR-RB136-4	1300	10
MR-RB138-4	3900(3)	11


MR-RB138-4 1 3 가
3

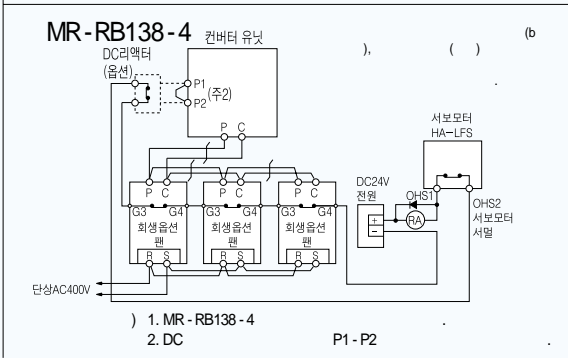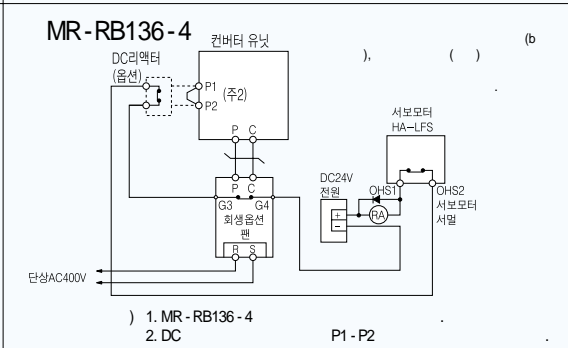

1. MR-J2S-11KA4/B4~22KA4/B4 (MR-J2S- K 4-PX) 가, () ,
2. 100 가, () ,
3. (5m) ,
4. (1.0m³/min, 92 x 2) , No.0(MR-J2S-A)) No.2(MR-J2S-B))
5. 가

(MR-BAT)

가
 1. A6BAT 가
 2. (IATA) (44) 2003 1 1



가 「 」 가
 (Class9) , 24

	MR - BAT
	3.6V
	1700mAh
	0.48g

24 903 가
 (2005 3)

(MR-J2CN3TM) ... MR-J2S-700A(4)/B(4)/CP/CL

1. MR-J2S-11KA(4)/B(4)
MR-H3CBL1M

MR-J2HBUS M CN4,

	(Kg)
MR-J2CN3TM	0.11

1. CC-Link (MR-J2S- CP-S084)

(MR-HDP01) ... MR-J2S-CP

MR-J2S-CL

(1)

패널 컷트

1. CC-Link (MR-J2S- CP-S084)
2. CN1 (MR-J2CN1)

(MR-DP60) ... MR-J2S-CP

MR-J2S-CL





<정면설치의 경우>

<내면설치의 경우>

1. MR-DP60 No.16 (MR-J2CN1)
2. CN1

(MR-(J)ACN)




50%

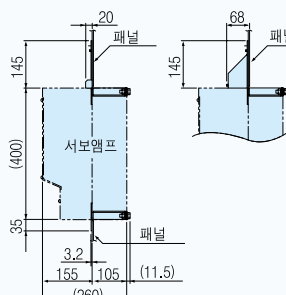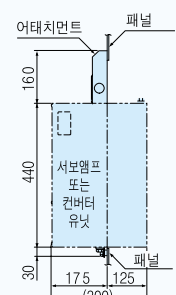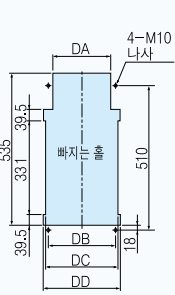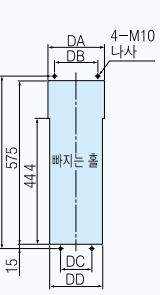(: mm)			(: mm)																																								
 <p><MR-JACN15K> <MR-JACN22K></p>	 <p><MR-ACN(P) K></p>	 <p><MR-JACN K></p>	 <p><MR-ACN(P) K></p>	<table border="1"> <thead> <tr> <th></th> <th></th> <th>DA</th> <th>DB</th> <th>DC</th> <th>DD</th> </tr> </thead> <tbody> <tr> <td>MR-JACN15K</td> <td>MR-J2S-11KA/B MR-J2S-15KA/B MR-J2S-11KA4/B4 MR-J2S-15KA4/B4</td> <td>203</td> <td>236</td> <td>255</td> <td>270</td> </tr> <tr> <td>MR-JACN22K</td> <td>MR-J2S-22KA/B MR-J2S-12KA4/B4</td> <td>290</td> <td>326</td> <td>345</td> <td>360</td> </tr> <tr> <td>MR-ACNP55K</td> <td>MR-HP30KA MR-HP55KA4</td> <td>205</td> <td>156</td> <td>110</td> <td>190</td> </tr> <tr> <td>MR-ACN30K</td> <td>MR-J2S-30KA4/B4</td> <td>385</td> <td>336</td> <td>290</td> <td>370</td> </tr> <tr> <td>MR-ACN55K</td> <td>MR-J2S-30KA/B MR-J2S-37KA/B MR-J2S-37KA4/B4 MR-J2S-45KA4/B4 MR-J2S-55KA4/B4</td> <td>455</td> <td>406</td> <td>360</td> <td>440</td> </tr> </tbody> </table>						DA	DB	DC	DD	MR-JACN15K	MR-J2S-11KA/B MR-J2S-15KA/B MR-J2S-11KA4/B4 MR-J2S-15KA4/B4	203	236	255	270	MR-JACN22K	MR-J2S-22KA/B MR-J2S-12KA4/B4	290	326	345	360	MR-ACNP55K	MR-HP30KA MR-HP55KA4	205	156	110	190	MR-ACN30K	MR-J2S-30KA4/B4	385	336	290	370	MR-ACN55K	MR-J2S-30KA/B MR-J2S-37KA/B MR-J2S-37KA4/B4 MR-J2S-45KA4/B4 MR-J2S-55KA4/B4	455	406	360	440
		DA	DB	DC	DD																																						
MR-JACN15K	MR-J2S-11KA/B MR-J2S-15KA/B MR-J2S-11KA4/B4 MR-J2S-15KA4/B4	203	236	255	270																																						
MR-JACN22K	MR-J2S-22KA/B MR-J2S-12KA4/B4	290	326	345	360																																						
MR-ACNP55K	MR-HP30KA MR-HP55KA4	205	156	110	190																																						
MR-ACN30K	MR-J2S-30KA4/B4	385	336	290	370																																						
MR-ACN55K	MR-J2S-30KA/B MR-J2S-37KA/B MR-J2S-37KA4/B4 MR-J2S-45KA4/B4 MR-J2S-55KA4/B4	455	406	360	440																																						

(FR-BIF, FR-BIF-H)





가 , 10MHz

FR-BIF	MR-J2S-22K , MR-J2S-30K	37K
FR-BIF-H	MR-J2S-60 4-MR-J2S-55K	4

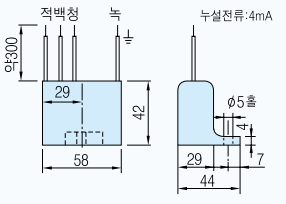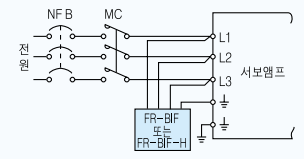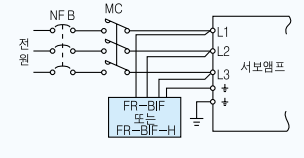(: mm)	
 <p>적백층 JIF 두실전류: 4mA φ5홀</p>	<p><MR-J2S-22K (4)></p>  <p><MR-J2S-30K (4)></p>  <p>1. 2. 3. FR-BIF</p>

(FR-BSF01, FR-BLF)

가 0.5MHz ~ 5MHz 가

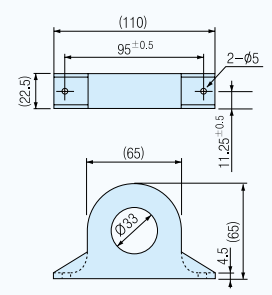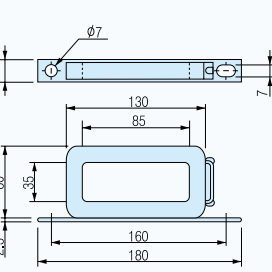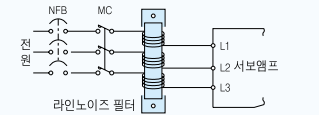(: mm)	
<p>• FR-BSF01 <MR-J2S-200 (4)></p> 	<p>가 가 4 2 가 가 () 가</p>
<p>• FR-BLF <MR-J2S-350 (4)></p> 	<p><MR-J2S-22K (4)></p>  <p>라인노이즈 필터</p> <p><MR-J2S-30K (4)></p>  <p>라인노이즈 필터</p>


(FR-BAL, FR-BEL, MR-DCL)

가


AC	FR-BAL-0.4K	MR-J2S-10A/A1/B/B1/CP/CP1/CL/CL1 MR-J2S-20A/B/CP/CL	A
	FR-BAL-0.75K	MR-J2S-40A/B/CP/CL MR-J2S-20A/B1/CP1/CL1	
	FR-BAL-1.5K	MR-J2S-60A/B/CP/CL MR-J2S-70A/B/CP/CL(- U) MR-J2S-40A/B1/CP1/CL1	
	FR-BAL-2.2K	MR-J2S-100A/B/CP/CL	
	FR-BAL-3.7K	MR-J2S-200A/B/CP/CL	
	FR-BAL-7.5K	MR-J2S-350A/B/CP/CL	
	FR-BAL-11K	MR-J2S-500A/B/CP/CL	
	FR-BAL-15K	MR-J2S-700A/B/CP/CL MR-J2S-11KA/B	
	FR-BAL-22K	MR-J2S-15KA/B	
	FR-BAL-30K	MR-J2S-22KA/B	


AC	FR-BAL-H1.5K	MR-J2S-60A4/B4	A
	FR-BAL-H2.2K	MR-J2S-100A4/B4	
	FR-BAL-H3.7K	MR-J2S-200A4/B4	
	FR-BAL-H7.5K	MR-J2S-350A4/B4	
	FR-BAL-H11K	MR-J2S-500A4/B4	
	FR-BAL-H15K	MR-J2S-700A4/B4	
DC	FR-BEL-15K	MR-J2S-11KA/B	B
	FR-BEL-22K	MR-J2S-15KA/B	
	FR-BEL-30K	MR-J2S-22KA/B	
	FR-BEL-H15K	MR-J2S-11KA4/B4	
	FR-BEL-H22K	MR-J2S-15KA4/B4	C
	FR-BEL-H30K	MR-J2S-22KA4/B4	
	MR-DCL30K	MR-J2S-30KA/B	
	MR-DCL37K	MR-J2S-37KA/B	
	MR-DCL30K-4	MR-J2S-30KA4/B4	
	MR-DCL37K-4	MR-J2S-37KA4/B4	
	MR-DCL45K-4	MR-J2S-45KA4/B4	
	MR-DCL55K-4	MR-J2S-55KA4/B4	

(: mm)

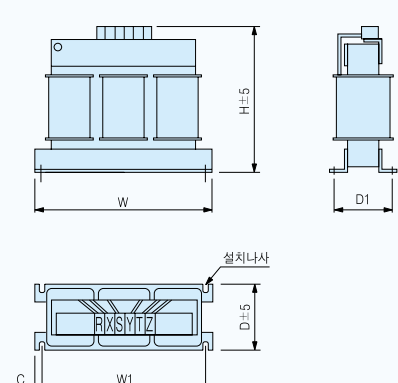


	(mm)								(kg)
	W	W1	H	D	D1	C			
FR-BAL-0.4K	135	120	115	59	45 ^{+0.25}	7.5	M4	M3.5	2.0
FR-BAL-0.75K	135	120	115	69	57 ^{+0.25}	7.5	M4	M3.5	2.8
FR-BAL-1.5K	160	145	140	71	55 ^{+0.25}	7.5	M4	M3.5	3.7
FR-BAL-2.2K	160	145	140	91	75 ^{+0.25}	7.5	M4	M3.5	5.6
FR-BAL-3.7K	220	200	192	90	70 ^{+0.25}	10	M5	M4	8.5
FR-BAL-7.5K	220	200	194	120	100 ^{+0.25}	10	M5	M5	14.5
FR-BAL-11K	280	255	220	135	100 ^{+0.25}	12.5	M6	M6	19
FR-BAL-15K	295	270	275	133	110 ^{+0.25}	12.5	M6	M6	27
FR-BAL-22K	290	240	301	199	170±0.5	25	M8	M8	35
FR-BAL-30K	290	240	301	219	190±0.5	25	M8	M8	43
FR-BAL-H1.5K	160	145	140	87	70 ^{+0.25}	7.5	M4	M3.5	5.3
FR-BAL-H2.2K	160	145	140	91	75 ^{+0.25}	7.5	M4	M3.5	5.9
FR-BAL-H3.7K	220	200	190	90	70 ^{+0.25}	10	M5	M3.5	8.5
FR-BAL-H7.5K	220	200	192	120	100±0.5	10	M5	M4	14
FR-BAL-H11K	280	255	226	130	100±0.5	12.5	M6	M5	18.5
FR-BAL-H15K	295	270	244	130	110±0.5	12.5	M6	M5	27
FR-BAL-H22K	290	240	269	199	170±0.5	25	M8	M8	35
FR-BAL-H30K	290	240	290	219	190±0.5	25	M8	M8	43

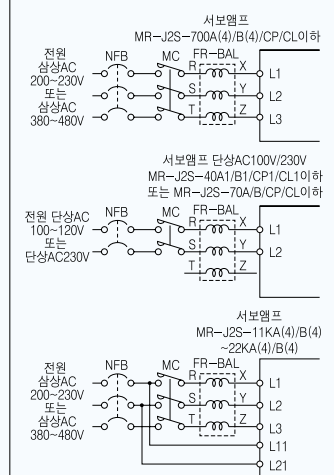


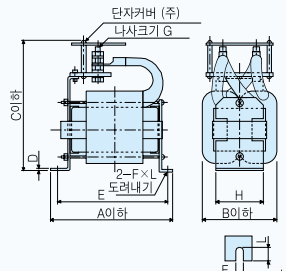


	(mm)								(kg)	(mm)		
	A	B	C	D	E	F	L	G	H			
FR-BEL-15K	170	93	170	2.3	155	6	14	M8	56	M5	3.8	22(AWG4)
FR-BEL-22K	185	119	182	2.6	165	7	15	M8	70	M6	5.4	30(AWG2)
FR-BEL-30K	185	119	201	2.6	165	7	15	M8	70	M6	6.7	60(AWG2/0)
FR-BEL-H15K	170	93	160	2.3	155	6	14	M6	56	M5	3.7	8(AWG8)
FR-BEL-H22K	185	119	171	2.6	165	7	15	M6	70	M6	5.0	22(AWG4)
FR-BEL-H30K	185	119	189	2.6	165	7	15	M6	70	M6	6.7	22(AWG4)



1. DC P-P1
2. DC 5m

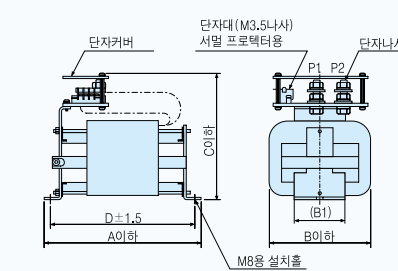

	(mm)					(kg)	(mm)	
	A	B	B1	C	D			
MR-DCL30K	255	135	80	215	232	M12	9.5	60(AWG2/0)
MR-DCL37K								80(AWG3/0)
MR-DCL30K-4	205	135	75	200	175	M8	6.5	30(AWG2)
MR-DCL37K-4	225	135	80	200	197	M8	7	38(AWG2)
MR-DCL45K-4	240	135	80	200	212	M8	7.5	50(AWG1/0)
MR-DCL55K-4	260	135	80	215	232	M8	9.5	60(AWG2/0)



1. DC P1-P2
2. DC 5m

			(mm ²)											
			L1, L2, L3, ⊕	L11, L21, 24V · L11, 0V · L21(6)	U, V, W, ⊕	P, C (7)	BU, BV, BW	B1, B2	OHS1, OHS2					
MR-J2S-10A/A1/B/B1/CP/CP1/CL/CL1	30A	5A	S - N10	2(AWG14)	1.25 (AWG16)	2 (AWG14)	-	-	-					
MR-J2S-20A/B/CP/CL														
MR-J2S-40A/B/CP/CL	30A	10A												
MR-J2S-20A1/B1/CP1/CL1														
MR-J2S-60A/B/CP/CL	30A	15A												
MR-J2S-40A1/B1/CP1/CL1														
MR-J2S-70A/B/CP/CL(-U)			S - N18	3.5(AWG12)	1.25 (AWG16)	2 (AWG14)	(3)	1.25 (AWG16)	(4)					
MR-J2S-100A/B/CP/CL	30A	20A												
MR-J2S-200A/B/CP/CL	30A	20A	S - N20	5.5(AWG10)										
MR-J2S-350A/B/CP/CL	30A	30A	S - N35	5.5(AWG10)	1.25 (AWG16)	2 (AWG14)	(3)	-	-					
MR-J2S-500A/B/CP/CL	50A	50A	S - N50	8(AWG8)										
MR-J2S-700A/B/CP/CL	100A	75A	S - N65	14(AWG6)	2 (AWG14)	2 (AWG14)	-	-	-					
MR-J2S-11KA/B	100A	100A	S - N95	22(AWG4)										
MR-J2S-15KA/B	225A	125A	S - N125	50(AWG1/0)										
MR-J2S-22KA/B	225A	175A	S - N150	60(AWG2/0)										
MR-J2S-30KA/B	400A	250A	S - N180	80(AWG3/0)										
MR-J2S-37KA/B	400A	300A												
MR-J2S-60A4/B4	30A	5A	S - N10	2(AWG14)						1.25 (AWG16)	2 (AWG14)	-	-	-
MR-J2S-100A4/B4	30A	10A												
MR-J2S-200A4/B4	30A	15A	S - N18	3.5(AWG12)						1.25 (AWG16)	2 (AWG14)	(3)	1.25 (AWG16)	(4)
MR-J2S-350A4/B4	30A	20A												
MR-J2S-500A4/B4	30A	30A	S - N20	5.5(AWG10)	1.25 (AWG16)	2 (AWG14)	(3)	-	-					
MR-J2S-700A4/B4	50A	40A	S - N25	8(AWG8)										
MR-J2S-11KA4/B4	60A	60A	S - N35	14(AWG6)	2 (AWG14)	2 (AWG14)	-	-	-					
MR-J2S-15KA4/B4	100A	75A	S - N65	22(AWG4)										
MR-J2S-22KA4/B4	225A	125A	S - N95	50(AWG1/0)	2 (AWG14)	2 (AWG14)	-	-	-					
MR-J2S-30KA4/B4	225A	150A	S - N125	30(AWG2)										
MR-J2S-37KA4/B4	225A	175A	S - N150	38(AWG2)										
MR-J2S-45KA4/B4	225A	225A	S - N180	50(AWG1/0)										
MR-J2S-55KA4/B4	400A	250A		60(AWG2/0)	2 (AWG14)	2 (AWG14)	-	-	-					

- 1. 600V 30m
- 2. HC - RFS203 3.5mm²(AWG12)
- 3. HA - LFS601(4) HA - LFS701M(4) 2mm²(AWG14)
- 4. HA - LFS601(4) HA - LFS701M(4) 1.25mm²(AWG16)
- 5. MR - J2S - 15KA/B U, V, W 38 - S6() R38 - 6S()
- 6. 24V · L11, 0V · L21 MR - J2S - 60A4/B4-700A4/B4
- 7. 5m

AC , AC (QD75D)
 DC , DC
 AC : 972A - 2003 504 11 (AC200V 松尾電機製)
 DC : ESD - SR - 25 () ZCAT3035 - 1330 (TDK)
 : 2 : 4

EMC

EMC

SF1252	MR - J2S - 10A/B/CP/CL~ 100A/B/CP/CL MR - J2S - 10A1/B1/CP1/CL1~ 40A1/B1/CP1/CL1	A
SF1253	MR - J2S - 200A/B/CP/CL MR - J2S - 350A/B/CP/CL	B
HF3040A - TM()	MR - J2S - 500A/B/CP/CL	C
HF3050A - TM()	MR - J2S - 700A/B/CP/CL	
HF3060A - TMA()	MR - J2S - 11KA/B	
HF3080A - TMA()	MR - J2S - 15KA/B	
HF3100A - TMA()	MR - J2S - 22KA/B	
HF3200A - TMA()	MR - J2S - 30KA/B MR - J2S - 37KA/B	D

TF3005C - TX()	MR - J2S - 60A4/B4 MR - J2S - 100A4/B4 MR - J2S - 200A4/B4	E
TF3020C - TX()	MR - J2S - 350A4/B4 MR - J2S - 500A4/B4 MR - J2S - 700A4/B4	
TF3030C - TX()	MR - J2S - 11KA4/B4	
TF3040C - TX()	MR - J2S - 15KA4/B4	F
TF3060C - TX()	MR - J2S - 22KA4/B4	
TF3150C - TX()	MR - J2S - 30KA4/B4 MR - J2S - 37KA4/B4 MR - J2S - 45KA4/B4 MR - J2S - 55KA4/B4	G

(: mm)

A

SF1252

	(kg)
SF1252	0.75

B

SF1253

	(kg)
SF1253	1.37

C

HF3040 - TM, HF3050A - TM, HF3060A - TMA, HF3080A - TMA, HF3100A - TMA
 <HF3040A - TM, HF3050A - TM, HF3060A - TMA> <HF3080A - TMA, HF3100A - TMA>

	(mm)											(kg)	
	A	B	C	D	E	F	G	H	J	K	L	M	
HF - 3040A - TM	260	210	85	155	140	125	44	140	70	R3.25	M5	M4	5.5
HF - 3050A - TM	290	240	100	190	175	160	44	170	100	8	M6	M4	6.7
HF - 3060A - TMA	290	240	100	190	175	160	44	230	160		M6	M4	10.0
HF - 3080A - TMA	405	350	100	220	200	180	56	210	135	R4.25	M8	M6	13.0
HF - 3100A - TMA										12			14.5

서보앰프
MR-J2S-350A/B/CP/CL이하
MR-J2S-40A1/B1/CP1/CL1이하

EMC필터

서보앰프

전원
AC200-230V
또는
단상 AC230V

1. AC230V
L3
MR - J2S - 70
100-120V
가

L1' - L2
AC230V
L3

서보앰프
MR-J2S-500A/B/CP/CL
MR-J2S-700A/B/CP/CL
MR-J2S-11KA/B-22KA/B

전원
AC200-230V


EMC필터

서보앰프

73

	(: mm)									
D	<p>HF3200A-TMA</p> <p>EMC 가</p> <table border="1"> <thead> <tr> <th></th> <th>(kg)</th> </tr> </thead> <tbody> <tr> <td>HF3200A-TMA</td> <td>23.5</td> </tr> </tbody> </table>		(kg)	HF3200A-TMA	23.5					
	(kg)									
HF3200A-TMA	23.5									
E	<p>TF3005C-TX, TF3020C-TX, TF3030C-TX</p> <table border="1"> <thead> <tr> <th></th> <th>(kg)</th> </tr> </thead> <tbody> <tr> <td>TF3005C-TX</td> <td>6</td> </tr> <tr> <td>TF3020C-TX</td> <td>6</td> </tr> <tr> <td>TF3030C-TX</td> <td>7.5</td> </tr> </tbody> </table>		(kg)	TF3005C-TX	6	TF3020C-TX	6	TF3030C-TX	7.5	
	(kg)									
TF3005C-TX	6									
TF3020C-TX	6									
TF3030C-TX	7.5									
F	<p>TF3040C-TX, TF3060C-TX</p> <table border="1"> <thead> <tr> <th></th> <th>(kg)</th> </tr> </thead> <tbody> <tr> <td>TF3040C-TX</td> <td>12.5</td> </tr> <tr> <td>TF3060C-TX</td> <td>12.5</td> </tr> </tbody> </table>		(kg)	TF3040C-TX	12.5	TF3060C-TX	12.5			
	(kg)									
TF3040C-TX	12.5									
TF3060C-TX	12.5									
G	<p>TF3150C-TX</p> <table border="1"> <thead> <tr> <th></th> <th>(kg)</th> </tr> </thead> <tbody> <tr> <td>TF3150C-TX</td> <td>31</td> </tr> </tbody> </table>		(kg)	TF3150C-TX	31					
	(kg)									
TF3150C-TX	31									

<MR Configurator (-) MRZJW3-SETUP1 (10) >

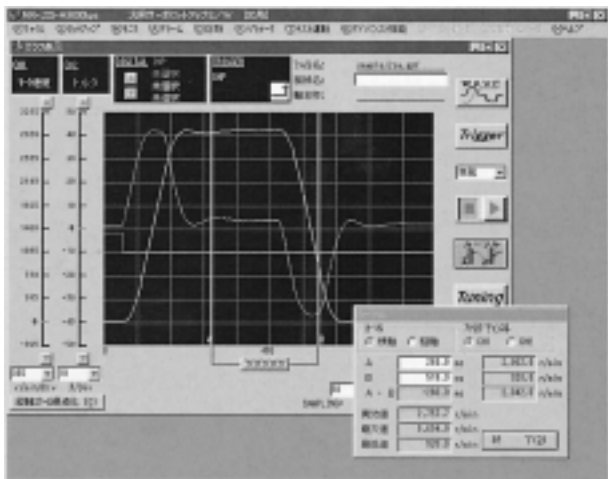

- (1) Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, Windows NT Workstation 4.0, Windows 2000 Professional, Windows XP Professional, Windows XP Home Edition (1, 2)
- (2)
- (3)

(1, 8)	Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, Windows NT Workstation 4.0, Windows 2000 Professional, Windows XP Professional, Windows XP Home Edition IBM PC/AT : Pentium 133MHz (Windows 95, Windows 98, Windows 98 Second Edition, Windows NT Workstation 4.0, Windows 2000 Professional), Pentium 150MHz (Windows Me) Pentium 300MHz (Windows XP Professional/Home Edition) : 16MB (Windows 95), 24MB (Windows 98, Windows 98 Second Edition) 32MB (Windows Me, Windows NT Workstation 4.0, Windows 2000 Professional) 128MB (Windows XP Professional/Home Edition) : 40MB
OS (10)	Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, Windows NT Workstation 4.0, Windows 2000 Professional, Windows XP Professional, Windows XP Home Edition (2)
	800 x 600 , High Color (16) 가가
	가
	가
	가
	MR - CPCATCBL3M

() MR - J2S

	DI/DO (7), ON , SW , VC (3), (), - (5)
	(7)
	JOG , DO , 1 (4), (6)
	(4)
(6)	

1. Windows, Windows NT Microsoft Corporation 가
 2. Windows XP MRZJW3-SETUP161
 3. VC - MR - J2S - A
 4. MR - J2S - CP
 5.
 6. MR - J2S - CL
 7. MR - J2S - CP MR - J2S - CL
 8. 가 가
 9. 가
 10. MR Configurator (-) MRZJW3-SETUP111 MR - J2S - B , MRZJW3-SETUP121 MR - J2S - 500 /MR - J2S - 700 , MRZJW3-SETUP111~SETUP131 Windows 95, Windows 98 . MRZJW3-SETUP151 MR - J2S - CP , MR Configurator(-) ()





A

B



C

P

L

<)>
MRZJW3-MOTSZ111 (4) ...

:http://www.mitsubishi - automation.co.kr

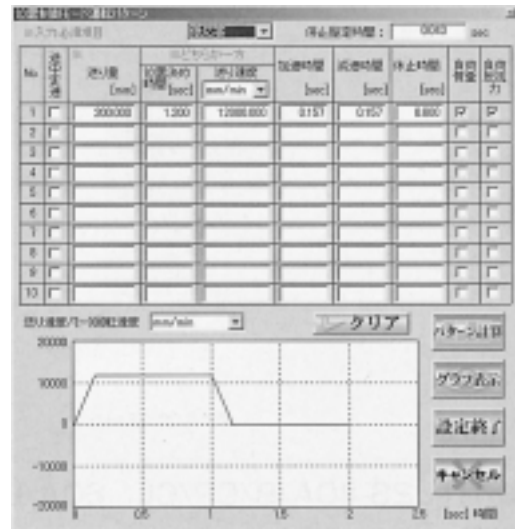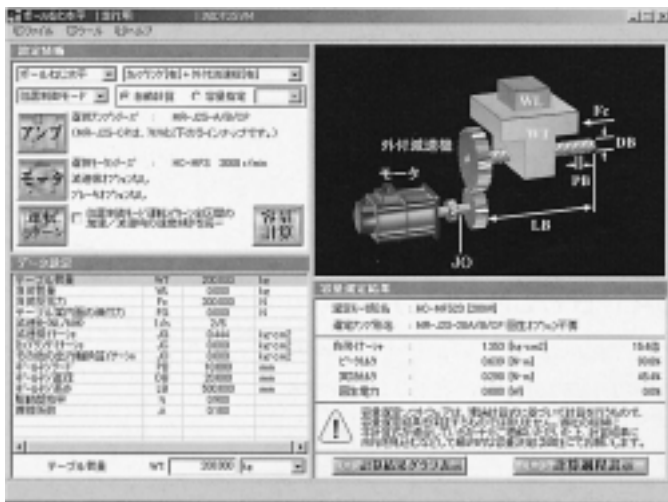


- (1) , 2 가 .
- (2) () 가가 .
- (3) Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, Windows NT Workstation4.0, Windows 2000 Professional, Windows XP Professional, Windows XP Home Edition(1)

(1, 2)	Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, WindowsNT Workstation4.0, Windows 2000 Professional, Windows XPProfessional, Windows XPHome Edition IBM PC/AT : Pentium 133MHz (Windows 95, Windows 98, Windows 98 Second Edition, WindowsNT Workstation4.0, Windows 2000 Professional), Pentium 150MHz (Windows Me) Pentium 300MHz (Windows XP Professional/Home Edition) : 16MB (Windows 95), 24MB (Windows 98, Windows 98 Second Edition) 32MB (Windows Me, WindowsNT Workstation4.0, Windows 2000 Professional) 128MB (Windows XP Professional/Home Edition) : 40MB
OS	Windows 95, Windows 98, Windows 98 Second Edition, Windows Me, WindowsNT Workstation4.0, Windows 2000 Professional, Window XP Professional, Window XP Home Edition
	800 × 600 , High Color(16) 가가 .
	가 .
	가 . ,
	가 .


	(Ball screw) , (Ball screw) , & , , , , , , ()
	, , (MR - J2M) ,
	() ,
	, ,

1. Windows, Windows NT Microsoft Corporation 가
 2. 가
 3. 가
 4. MR - J2S - 60A4/B4-MR - J2S - 22KA4/B4 A4
 HC - G5/G7 A6 , HC - SFS 4G5/G7(400V)


MR-J2S-10A/B/CP/CL, 20A/B/CP/CL, 10A1/B1/CP1/CL1, 20A1/B1/CP1/CL1 (1)

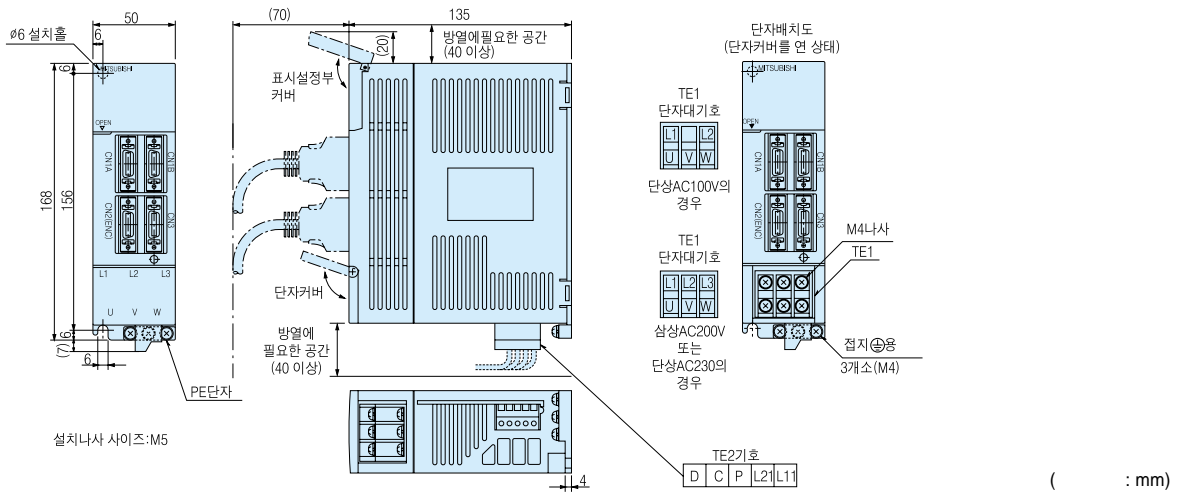

MR-J2S-40A/B/CP/CL, 60A/B/CP/CL, 40A1/B1/CP1/CL1 (1)

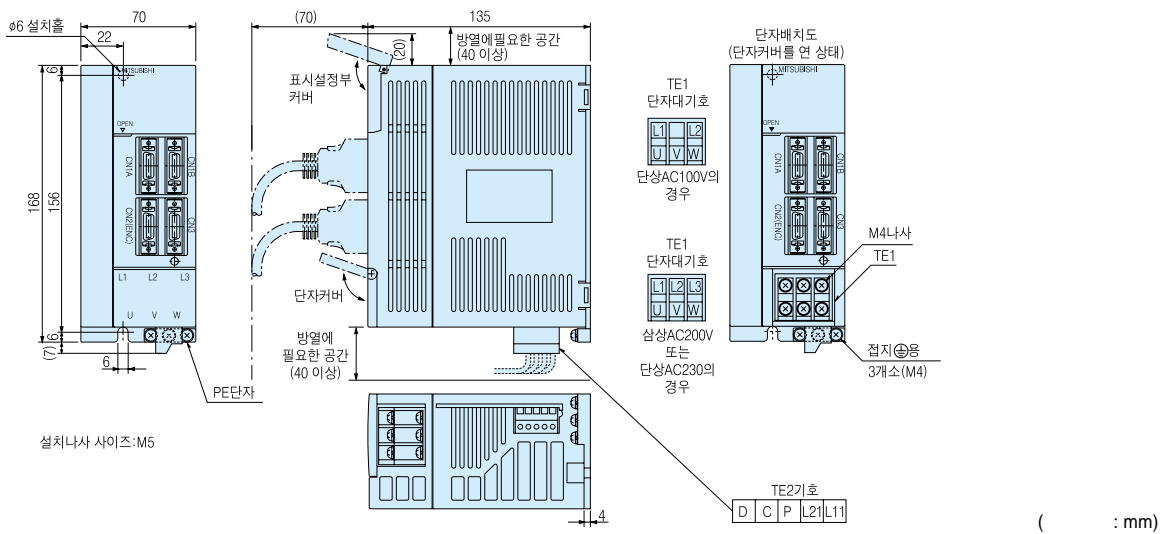


MR-J2S-70A/B/CP/CL(-U), 100A/B/CP/CL (1)

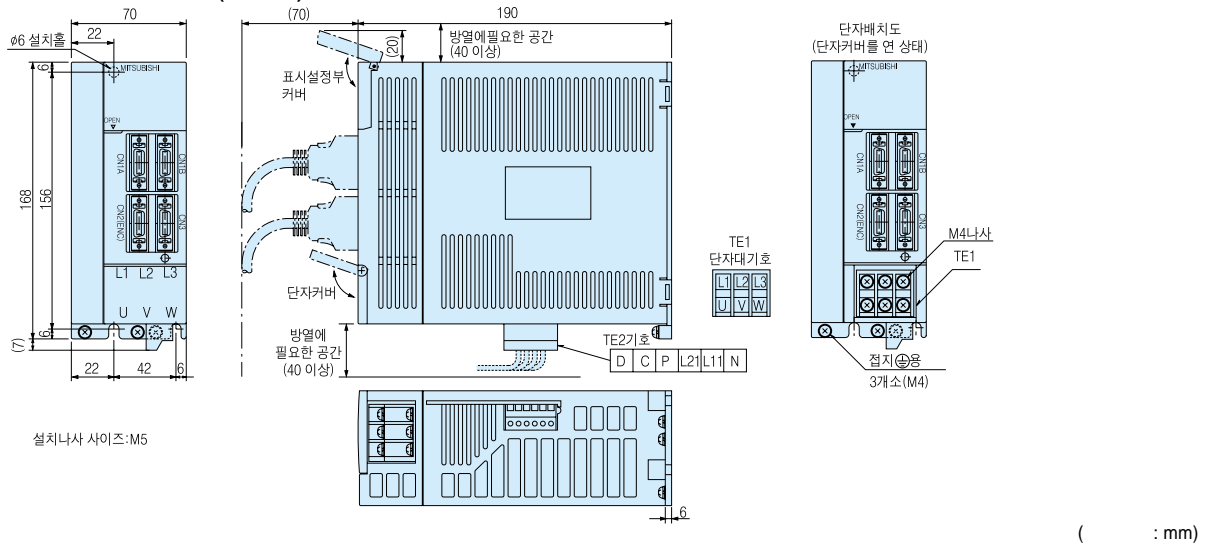


1. MR-J2S- CP(1)-S084 MR-J2S- CP(1)


MR-J2S-200A/B/CP/CL, 350A/B/CP/CL (1)

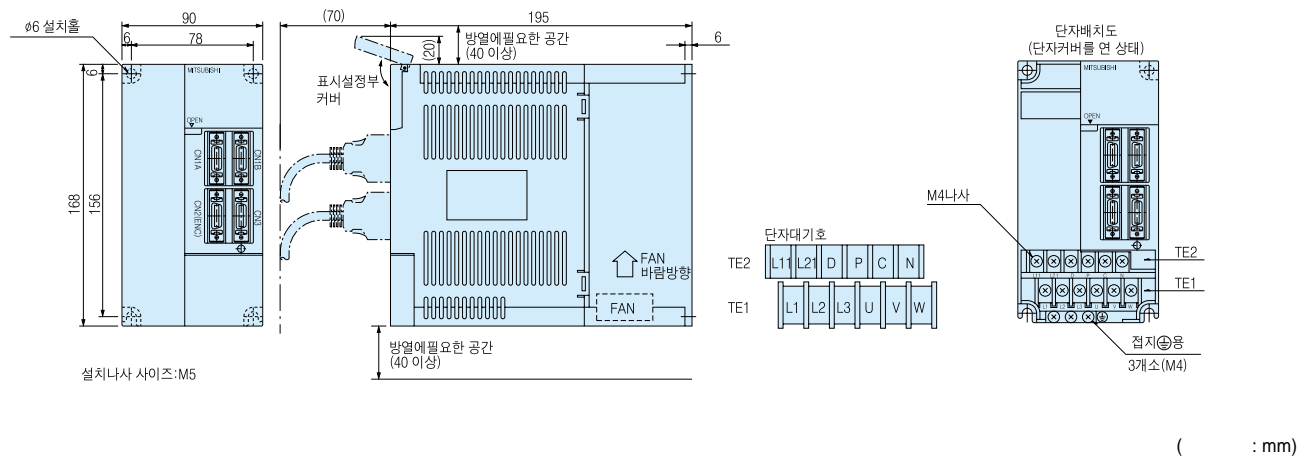

MR-J2S-500A/B/CP/CL (1), 350A4/B4, 500A4/B4


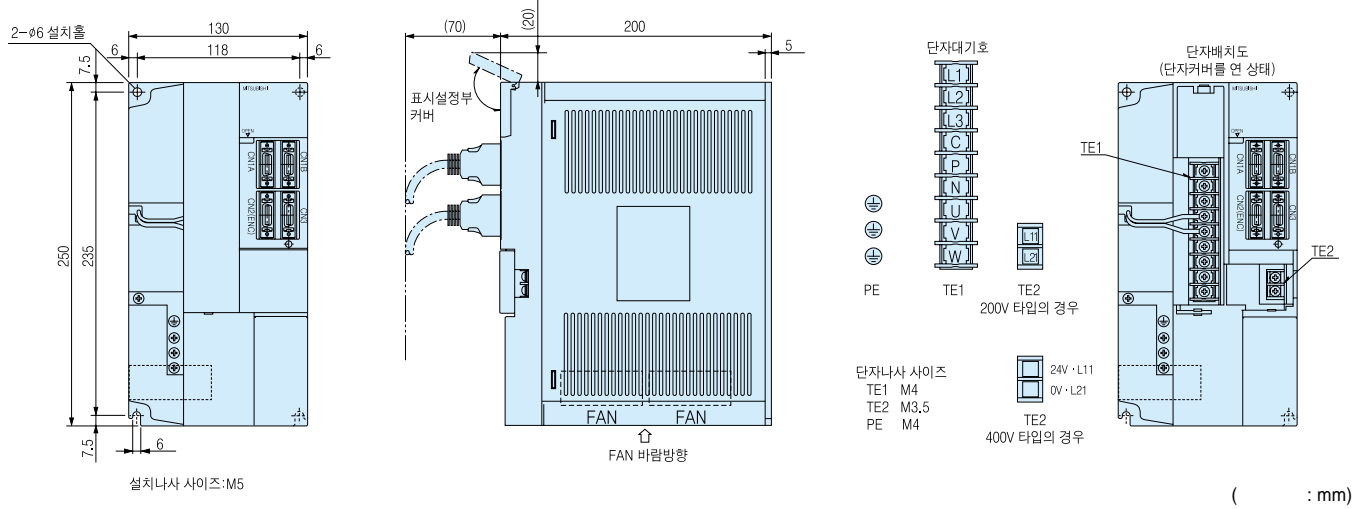


MR-J2S-700A/B/CP/CL (1), 700A4/B4

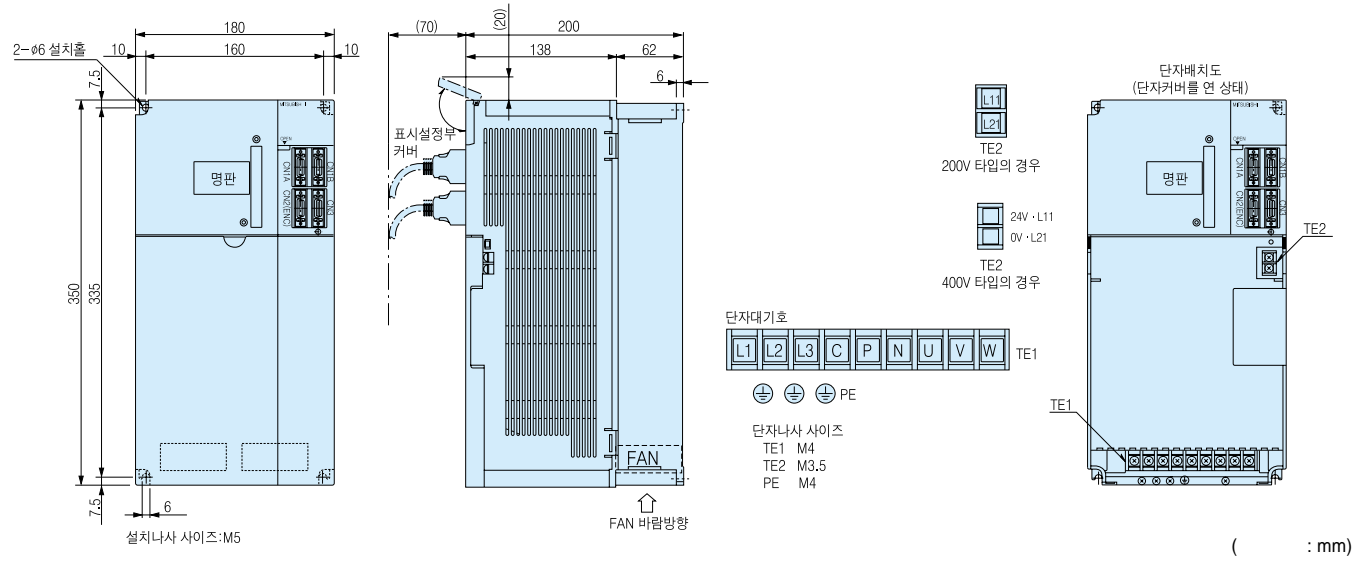


1. MR-J2S-CP(1)-S084 MR-J2S-CP(1)

MR-J2S-11KA/B, 15KA/B, 22KA/B, 11KA4/B4, 15KA4/B4, 22KA4/B4

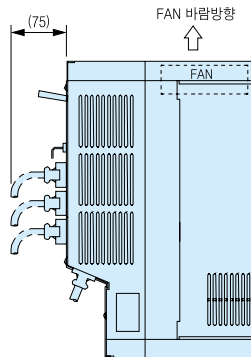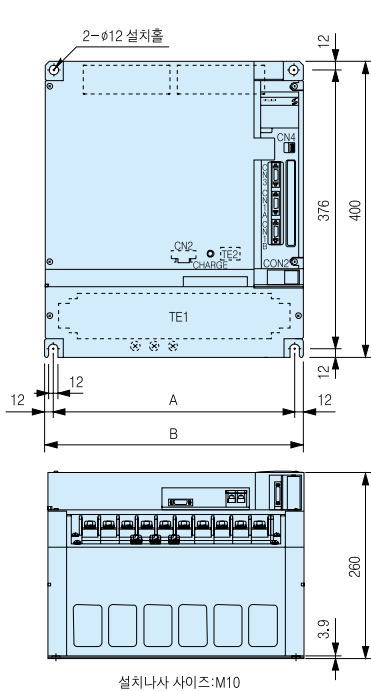

단자대배열




나사사이즈 : M6(MR-J2S-11KA(4)/B(4), 15KA(4)/B(4)의 경우)
 나사사이즈 : M8(MR-J2S-22KA(4)/B(4)의 경우)

TE2



나사사이즈 : M4

PE단자





나사사이즈 : M6(MR-J2S-11KA(4)/B(4), 15KA(4)/B(4)의 경우)
 나사사이즈 : M8(MR-J2S-22KA(4)/B(4)의 경우)


	A	B
MR - J2S - 11KA/B	236	260
MR - J2S - 15KA/B		
MR - J2S - 11KA4/B4		
MR - J2S - 15KA4/B4	326	350
MR - J2S - 22KA/B		
MR - J2S - 22KA4/B4		

(: mm)

MR-J2S-60A4/B4, 100A4/B4, 200A4/B4

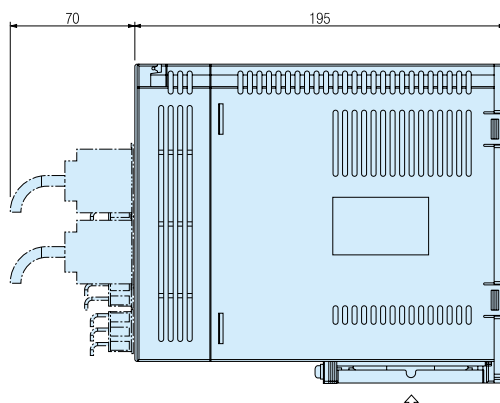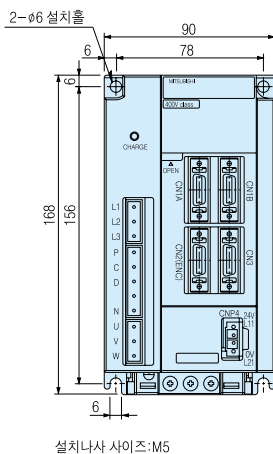


단자대배열



CNP1, CNP2, CNP3, CNP4

(: mm)

MR - J2S - 30KA/B, 37KA/B, 30KA4/B4~55KA4/B4

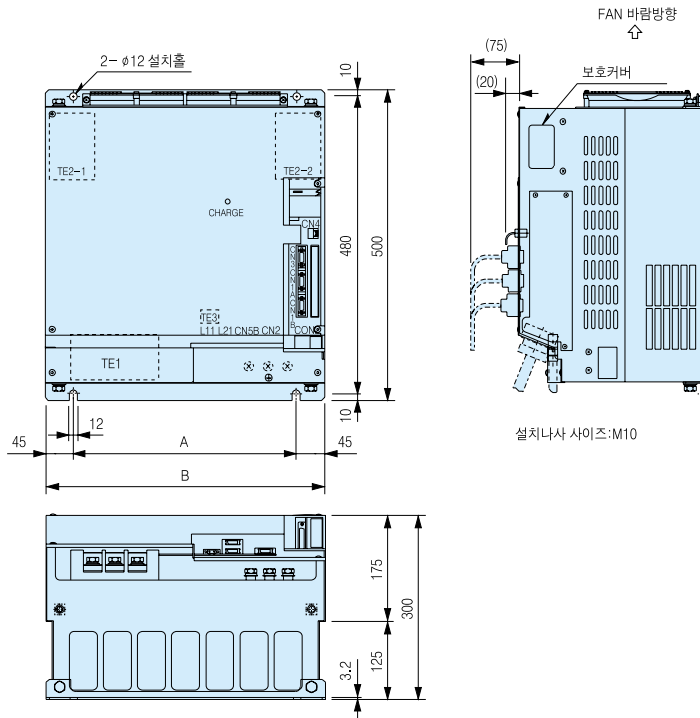

단자대배열
TE1
U V W 나사사이즈 : M10

TE3
L11 L21 나사사이즈 : M3
TE2


TE2-1
TE2-2
P 나사사이즈 : M10
N

⊕ 나사사이즈 : M10

	A	B
MR - J2S - 30KA4/B4	290	380
MR - J2S - 30KA/B MR - J2S - 37KA/B MR - J2S - 37KA4/B4 MR - J2S - 45KA4/B4 MR - J2S - 55KA4/B4	360	450

(: mm)

MR-HP30KA, MR-HP55KA4

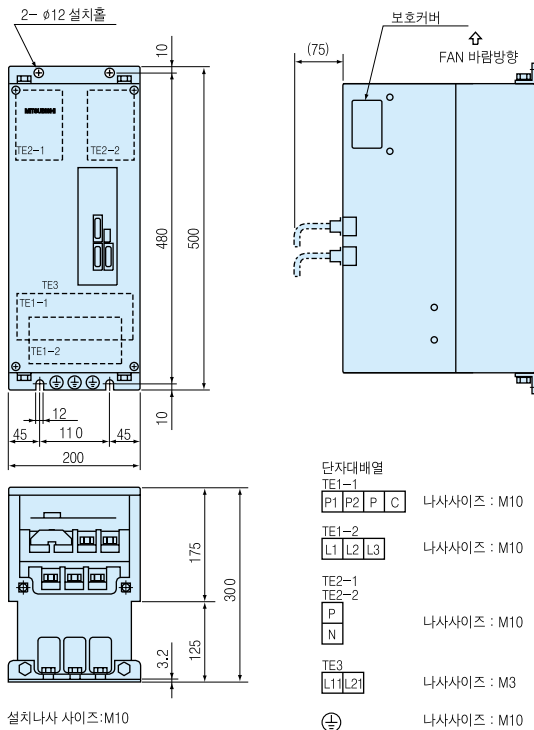


단자대배열
TE1-1
P1 P2 P C 나사사이즈 : M10

TE1-2
L1 L2 L3 나사사이즈 : M10

TE2-1
TE2-2
P 나사사이즈 : M10
N

TE3
L11 L21 나사사이즈 : M3
⊕ 나사사이즈 : M10



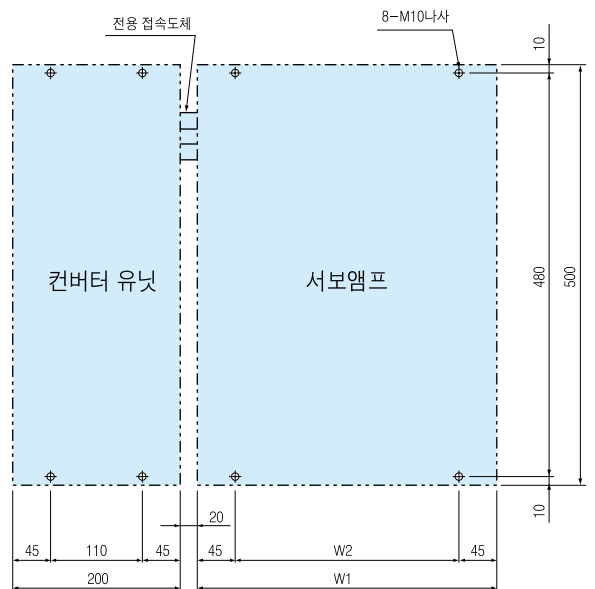


	A	B
MR - J2S - 30KA4/B4	380	290
MR - J2S - 30KA/B, 37KA/B MR - J2S - 37KA4/B4, 45KA4/B4 MR - J2S - 55KA4/B4	450	360

(: mm)

(: mm)



HC-KFS053(B), HC-KFS13(B) HC-MFS053(B), HC-MFS13(B)

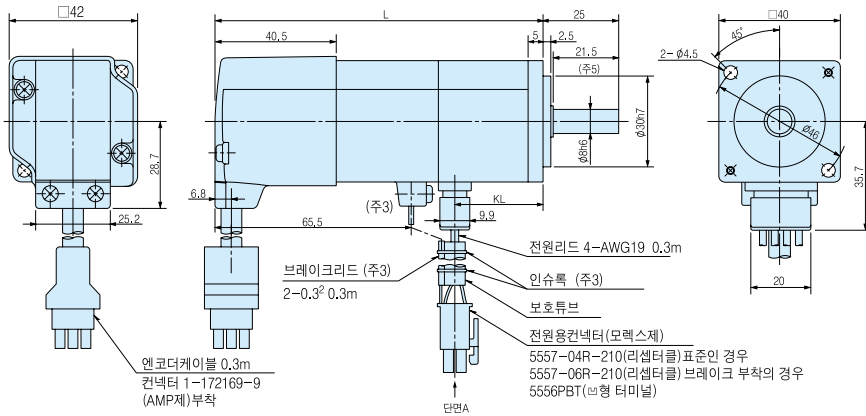

	L	KL
HC-KFS053(B) HC-MFS053(B)	81.5(109.5)	29.5
HC-KFS13(B) HC-MFS13(B)	96.5(124.5)	44.5

(: mm)


HC-KFS23(B), HC-KFS43(B) HC-MFS23(B), HC-MFS43(B)

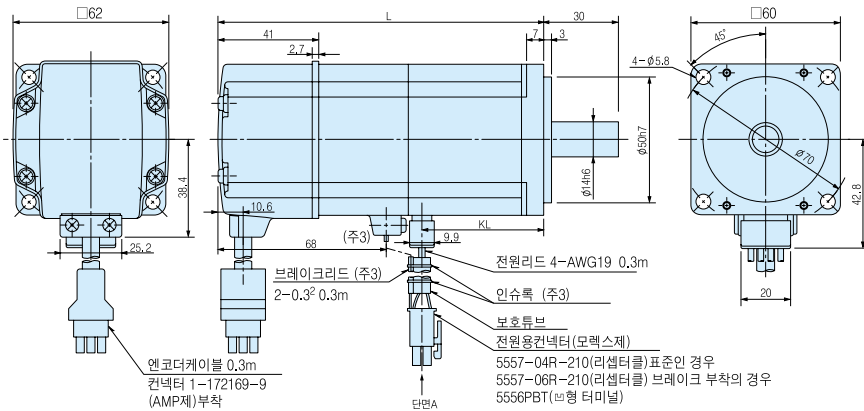

	L	KL
HC-KFS23(B) HC-MFS23(B)	99.5(131.5)	49.1
HC-KFS43(B) HC-MFS43(B)	124.5(156.5)	72.1

(: mm)

MC-KFS73(B), HC-MFS73(B)

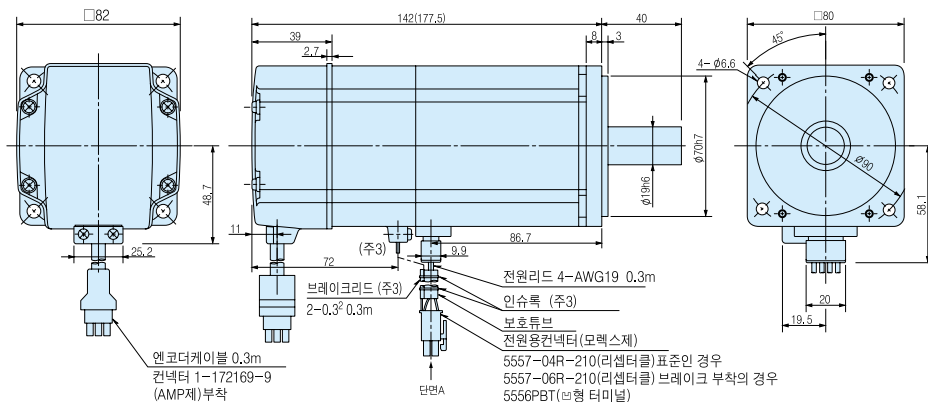


	L	KL
MC-KFS73(B) HC-MFS73(B)	142(177.5)	58.1


(: mm)

1. ()
2. ()
3. 가
4. 가
5. HC-KFS053(B), KFS13(B)


HC-KFS053(B)G1(1/5, 1/12, 1/20) HC-MFS053(B)G1(1/5, 1/12, 1/20)

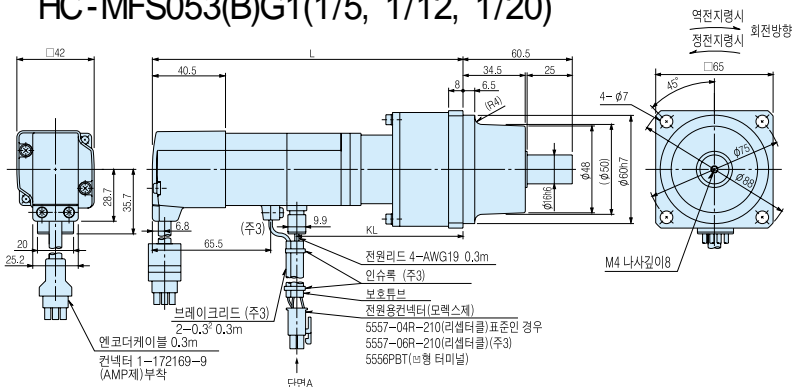

<표준인 경우>




<브레이크를 부착한 경우>




	()	J($\times 10^{-4}$ kg·m ²)		L	KL	(kg)
		HC-KFS053(B)G1	HC-MFS053(B)G1			
HC-KFS053(B)G1 HC-MFS053(B)G1	1/5 <9/44>	0.090 (0.093)	0.055 (0.058)	126 (154)	74	1.4 (1.8)
	1/12 <49/576>	0.112 (0.115)	0.077 (0.080)	144 (172)	92	1.8 (2.2)
	1/20 <25/484>	0.094 (0.097)	0.059 (0.062)	144 (172)	92	1.8 (2.2)

(: mm)


HC-KFS13(B)G1(1/5, 1/12, 1/20) HC-MFS13(B)G1(1/5, 1/12, 1/20)

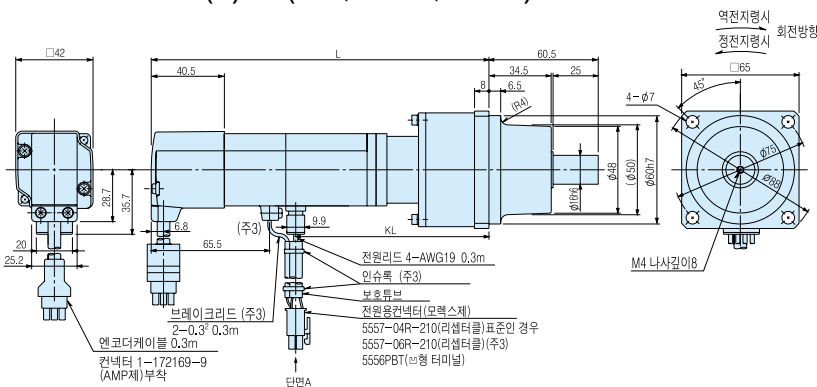

<표준인 경우>




<브레이크를 부착한 경우>




	()	J($\times 10^{-4}$ kg·m ²)		L	KL	(kg)
		HC-KFS13(B)G1	HC-MFS13(B)G1			
HC-KFS13(B)G1 HC-MFS13(B)G1	1/5 <9/44>	0.121 (0.124)	0.067 (0.069)	141 (169)	89	1.5 (1.9)
	1/12 <49/576>	0.143 (0.146)	0.089 (0.091)	159 (187)	107	1.9 (2.3)
	1/20 <25/484>	0.125 (0.128)	0.071 (0.073)	159 (187)	107	1.9 (2.3)

(: mm)


HC-KFS23(B)G1(1/5, 1/12, 1/20) HC-MFS23(B)G1(1/5, 1/12, 1/20)

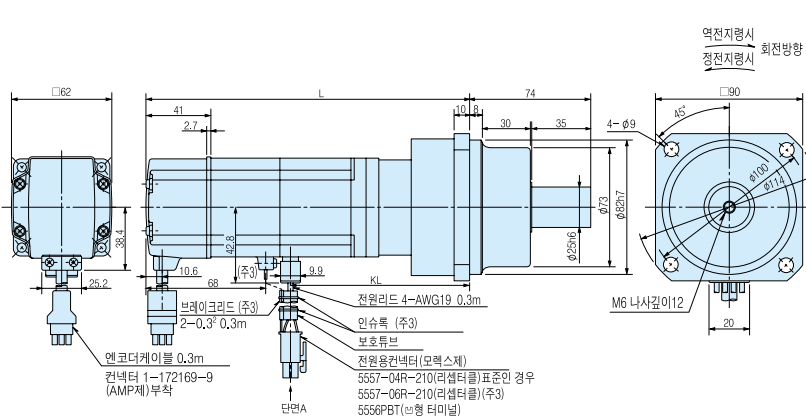

<표준인 경우>



<브레이크를 부착한 경우>



	()	J($\times 10^{-4}$ kg·m ²)		L	KL	(kg)
		HC-KFS23(B)G1	HC-MFS23(B)G1			
HC-KFS23(B)G1 HC-MFS23(B)G1	1/5 <19/96>	0.420 (0.470)	0.249 (0.289)	153 (185)	102.6	3.3 (3.9)
	1/12 <25/288>	0.470 (0.520)	0.293 (0.333)	173 (205)	122.6	3.9 (4.5)
	1/20 <253/5000>	0.440 (0.490)	0.266 (0.306)	173 (205)	122.6	3.9 (4.5)

(: mm)




1. ()
2. ()
3. ()
4. (+)
5. 가

가

1-3mm

가



HC-KFS43(B)G1(1/5, 1/12) HC-MFS43(B)G1(1/5, 1/12)

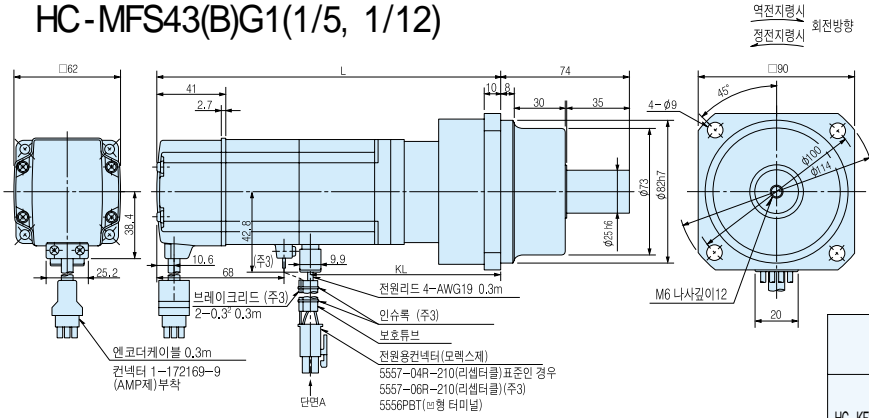

	()	J (x 10 ⁻⁴ kg · m ²)		L	KL	(kg)
		HC-KFS43(B)G1	HC-MFS43(B)G1			
HC-KFS43(B)G1	1/5 <19/96>	0.610 (0.660)	0.296 (0.344)	178 (210)	125.6	3.8 (4.4)
HC-MFS43(B)G1	1/12 <25/288>	0.660 (0.710)	0.339 (0.388)	198 (230)	145.6	4.4 (5.0)

() : mm

HC-KFS43(B)G1(1/20), HC-KFS73(B)G1(1/5, 1/12, 1/20) HC-MFS43(B)G1(1/20), HC-MFS73(B)G1(1/5, 1/12, 1/20)

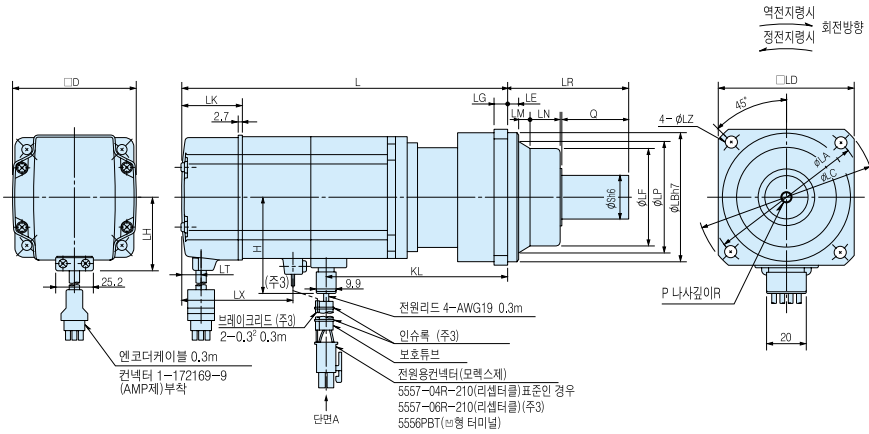




			J (x 10 ⁻⁴ kg · m ²)																	(kg)									
			HC-KFS43(B)G1	HC-MFS43(B)G1	D	LH	LK	LT	LX	H	LA	LB	LC	LD	LE	LF	LG	LM	LN		LP								
HC-KFS43(B)G1	1/20	253/5000	0.970 (1.02)	0.653 (0.700)	62	38.4	41	10.6	68	42.8	115	95	132	100	10	73	10	13	16	86	201.5(233.5)	149.1	90	9	50	32	M8	16	5.5(6.1)

			J (x 10 ⁻⁴ kg · m ²)																	(kg)									
			HC-KFS73(B)G1	HC-MFS73(B)G1	D	LH	LK	LT	LX	H	LA	LB	LC	LD	LE	LF	LG	LM	LN		LP								
HC-KFS73(B)G1	1/5	1/5	1.930(2.055)	1.02(1.145)	82	48.7	39	11	72	58.1	115	95	132	100	10	73	10	13	16	86	207(242.5)	151.7	90	9	50	32	M8	16	6.2(7.2)
HC-MFS73(B)G1	1/12	525/6048	2.596(2.721)	1.686(1.811)	82	48.7	39	11	72	58.1	115	95	132	100	10	73	10	13	16	86	229(264.5)	173.7	90	9	50	32	M8	16	7.3(8.3)
	1/20	625/12544	2.660(2.785)	1.75(1.875)	82	48.7	39	11	72	58.1	140	115	162	120	12	90	15	13	20	104	242(277.5)	186.7	106	14	60	40	M10	20	10.1(11.1)

() : mm

1. ()
2. ()
3. ()
4. (+)
5. 가 , 1-3mm 가


HC-KFS053(B)G2(1/5, 1/9, 1/20, 1/29) HC-MFS053(B)G2(1/5, 1/9, 1/20, 1/29)

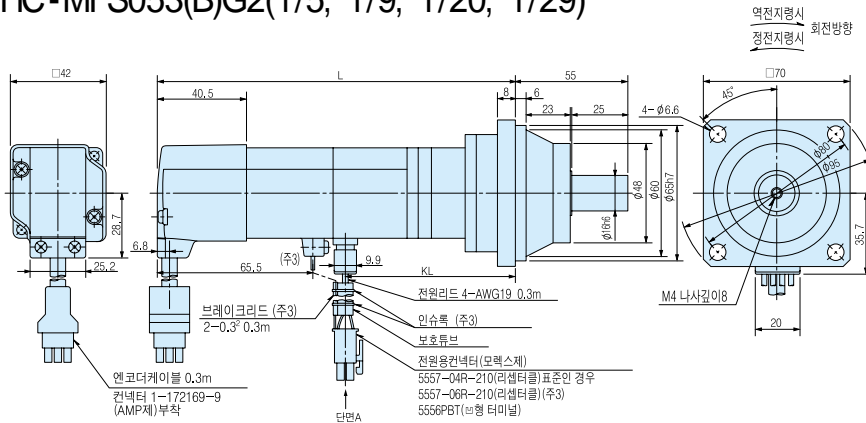

	()	J (× 10 ⁻⁴ kg · m ²)		L	KL	(kg)
		HC-KFS053(B)G2	HC-MFS053(B)G2			
HC-KFS053(B)G2	1/5	0.101(0.104)	0.067(0.07)	130(158)	78	1.4(1.8)
	1/9	0.095(0.098)	0.060(0.063)	146(174)	94	1.7(2.1)
HC-MFS053(B)G2	1/20	0.104(0.107)	0.069(0.072)	146(174)	94	1.8(2.2)
	1/29	0.092(0.095)	0.057(0.060)	146(174)	94	1.8(2.2)

(: mm)

HC-KFS13(B)G2(1/5, 1/9, 1/20, 1/29) HC-MFS13(B)G2(1/5, 1/9, 1/20, 1/29)

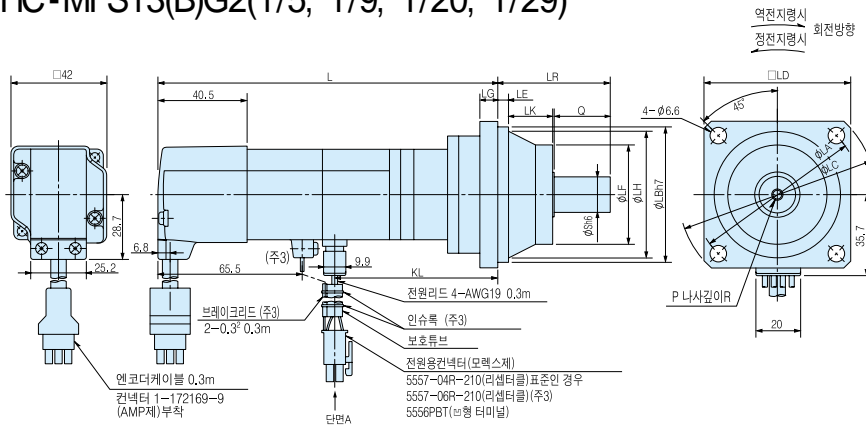

	()	J (× 10 ⁻⁴ kg · m ²)																(kg)		
		HC-KFS13(B)G2	HC-MFS13(B)G2	LA	LB	LC	LD	LE	LF	LG	LH	LK	L	KL	LR	Q	S		P	R
HC-KFS13(B)G2	1/5	0.132(0.135)	0.078(0.080)	80	65	95	70	6	48	8	60	23	145 (173)	93	55	25				1.5(1.9)
	1/9	0.126(0.129)	0.072(0.074)	80	65	95	70	6	48	8	60	23	161 (189)	109	55	25	16	M4	8	1.8(2.2)
HC-MFS13(B)G2	1/20	0.176(0.179)	0.122(0.124)	100	80	115	85	6	65	10	74	33	167 (195)	115	75	35				3.0(3.4)
	1/29	0.150(0.153)	0.096(0.098)	100	80	115	85	6	65	10	74	33	167 (195)	115	75	35	20	M5	10	3.0(3.4)


(: mm)

1. ()
2. ()
- 3.
4. (+)
5. 가

가 , 1-3mm 가

MELSERVO J2 Super


HC-KFS23(B)G2(1/5, 1/9, 1/20, 1/29) HC-MFS23(B)G2(1/5, 1/9, 1/20, 1/29)

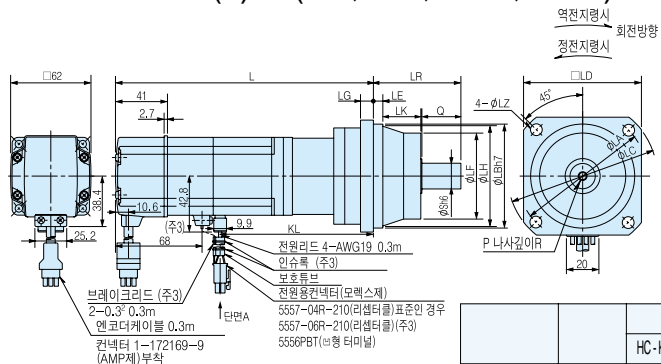

(: mm)

		J (x10 ⁴ kg·m ²)																	(kg)		
		HC-KFS23(B)G2	HC-MFS23(B)G2	LA	LB	LC	LD	LE	LF	LG	LH	LK	L	KL	LR	LZ	Q	S		P	R
HC-KFS23(B)G2	1/5	0.360(0.410)	0.191(0.239)	80	65	95	70	6	48	8	60	23	157 (180)	106.6	55	6.6	25	16	M4	8	2.1(2.7)
	1/9	0.380(0.430)	0.208(0.256)	100	80	115	85	6	65	10	74	33	175 (207)	124.6	75	6.6	35	20	M5	10	3.5(4.1)
HC-MFS23(B)G2	1/20	0.530(0.580)	0.357(0.405)	115	95	135	100	8	75	10	85	35	180 (212)	129.6	85	9	40	25	M6	12	5.0(5.6)
	1/29	0.450(0.500)	0.276(0.324)	115	95	135	100	8	75	10	85	35	180 (212)	129.6	85	9	40	25	M6	12	5.0(5.6)


HC-KFS43(B)G2(1/5, 1/9, 1/20, 1/29) HC-MFS43(B)G2(1/5, 1/9, 1/20, 1/29)

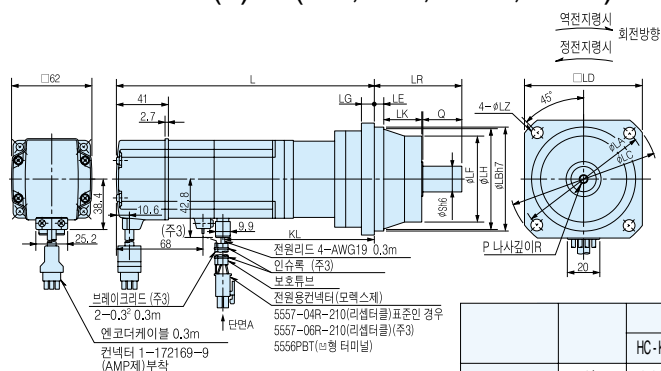

(: mm)

		J (x10 ⁴ kg·m ²)																	(kg)		
		HC-KFS43(B)G2	HC-MFS43(B)G2	LA	LB	LC	LD	LE	LF	LG	LH	LK	L	KL	LR	LZ	Q	S		P	R
HC-KFS43(B)G2	1/5	0.610(0.660)	0.295(0.344)	100	80	115	85	6	65	10	74	33	184 (216)	131.6	75	6.6	35	20	M5	10	3.7(4.3)
	1/9	0.640(0.690)	0.323(0.372)	115	95	135	100	8	75	10	85	35	205 (237)	152.6	85	9	40	25	M6	12	5.3(5.9)
HC-MFS43(B)G2	1/20	0.740(0.790)	0.426(0.475)	135	110	155	115	8	90	12	100	40	211 (243)	158.6	100	11	50	32	M8	16	7.5(8.1)
	1/29	0.660(0.710)	0.338(0.386)	135	110	155	115	8	90	12	100	40	211 (243)	158.6	100	11	50	32	M8	16	7.5(8.1)

HC-KFS73(B)G2(1/5, 1/9, 1/20, 1/29) HC-MFS73(B)G2(1/5, 1/9, 1/20, 1/29)

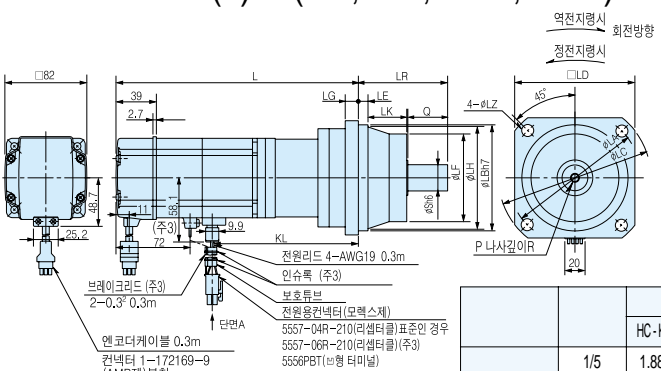


(: mm)

		J (x10 ⁴ kg·m ²)																	(kg)		
		HC-KFS73(B)G2	HC-MFS73(B)G2	LA	LB	LC	LD	LE	LF	LG	LH	LK	L	KL	LR	LZ	Q	S		P	R
HC-KFS73(B)G2	1/5	1.883(2.008)	0.973(1.098)	115	95	135	100	8	75	10	85	35	212 (247.5)	156.7	85	9	40	25	M6	12	6.3(7.3)
	1/9	1.890(2.015)	0.98(1.105)	135	110	155	115	8	90	12	100	40	240 (275.5)	184.7	100	11	50	32	M8	16	8.6(9.6)
HC-MFS73(B)G2	1/20	1.926(2.051)	1.016(1.141)	150	125	175	130	10	105	16	115	43	245 (283.5)	192.7	115	14	60	40	M10	20	12.0(13.0)
	1/29	1.820(1.945)	0.91(1.035)	150	125	175	130	10	105	16	115	43	245 (283.5)	192.7	115	14	60	40	M10	20	12.0(13.0)

1. ()
2. ()
3. ()
4. ()
5. 가 (+)

HC-KFS (B)G5
HC-MFS (B)G5

가

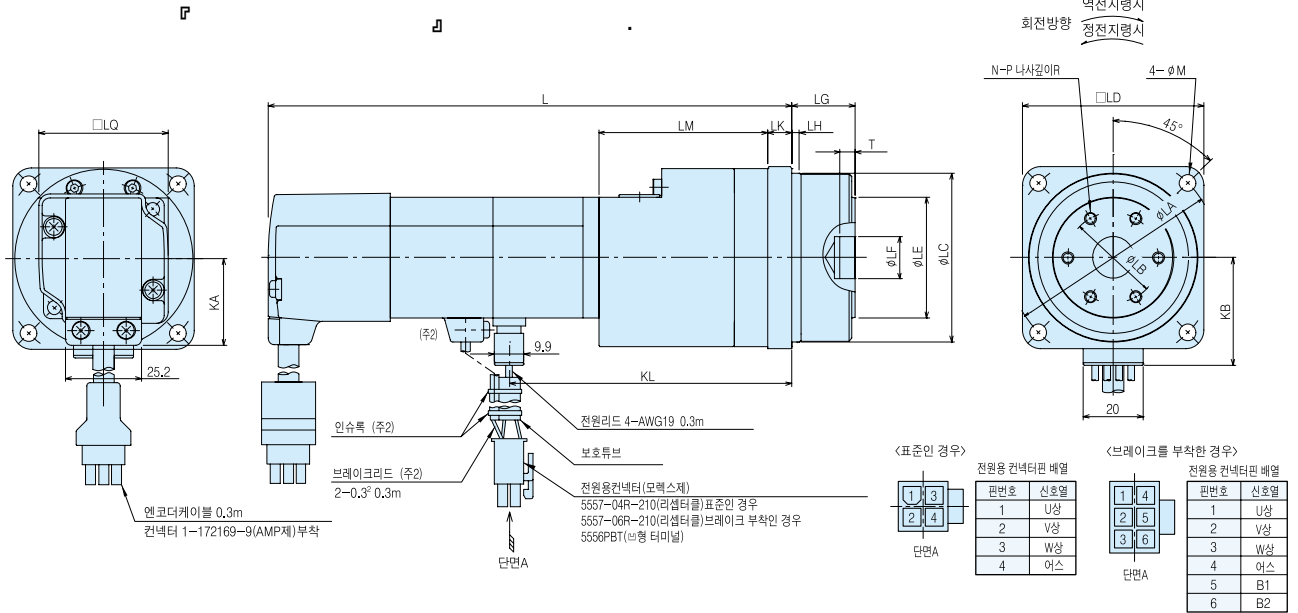

(: mm)

		J (x 10 ⁻⁴ kg · m ²)																			(kg)				
		HC-KFS (B)G5	HC-MFS (B)G5	L	LA	LB	LC	LD	LE	LF	LG	LH	LK	LM	KL	T	N	P	R	M		KA	KB	LQ	
HC-KFS053(B)G5 HC-MFS053(B)G5	1/5	0.121 (0.124)	0.087 (0.090)	145.5(173.5)		70	30	56h7	60	40	14H7	21 ^{+0.4} _{-0.5}	3	8	56	93.5	5	6	M4	7	5.5	28.7	35.7	42	1.1(1.5)
	1/11	0.113 (0.116)	0.079 (0.082)																						1.2(1.6)
	1/21	0.104 (0.107)	0.070 (0.073)																						1.3(1.6)
	1/33	0.098 (0.101)	0.064 (0.067)																						1.3(1.7)
	1/45	0.098 (0.101)	0.064 (0.067)																						2.5(2.9)
HC-KFS13(B)G5 HC-MFS13(B)G5	1/5	0.152 (0.155)	0.098 (0.100)	160.5(188.5)		70	30	56h7	60	40	14H7	21 ^{+0.4} _{-0.5}	3	8	56	108.5	5	6	M4	7	5.5	28.7	35.7	42	1.3(1.6)
	1/11	0.144 (0.147)	0.090 (0.092)																						1.3(1.7)
	1/21	0.135 (0.138)	0.081 (0.083)																						2.5(2.9)
	1/33	0.146 (0.149)	0.092 (0.094)																						1.8(2.4)
	1/45	0.145 (0.148)	0.091 (0.093)																						1.9(2.5)
HC-KFS23(B)G5 HC-MFS23(B)G5	1/5	0.461 (0.511)	0.289 (0.337)	163.5(191)	105	45	85h7	90	59	24H7	27 ^{+0.4} _{-0.5}	8	10	56.5	111	5	6	M6	10	9	38.4	42.8	62	1.8(2.4)	
	1/11	0.463 (0.513)	0.291 (0.339)																					1.9(2.5)	
	1/21	0.758 (0.808)	0.586 (0.634)																					3.5(4.1)	
	1/33	0.712 (0.762)	0.540 (0.588)																					2.3(2.9)	
	1/45	0.711 (0.761)	0.539 (0.587)																					4.0(4.6)	
HC-KFS43(B)G5 HC-MFS43(B)G5	1/5	0.661 (0.711)	0.344 (0.392)	188.5(220.5)	105	45	85h7	90	59	24H7	21 ^{+0.4} _{-0.5}	3	8	56	136.1	5	6	M4	7	5.5	38.4	42.8	62	2.3(2.9)	
	1/11	1.04 (1.09)	0.719 (0.767)																					4.0(4.6)	
	1/21	0.960 (1.01)	0.641 (0.689)																					6.1(6.7)	
	1/33	1.01 (1.06)	0.693 (0.741)																					1.8(2.4)	
	1/45	1.00 (1.05)	0.687 (0.735)																					1.9(2.5)	
HC-KFS73(B)G5 HC-MFS73(B)G5	1/5	2.16 (2.28)	1.25 (1.37)	220(255.5)	105	45	85h7	90	59	24H7	27 ^{+0.4} _{-0.5}	8	10	68	164.7	5	6	M6	10	9	48.7	58.1	82	5.0(6.0)	
	1/11	2.07 (2.19)	1.16 (1.28)																					5.3(6.3)	
	1/21	2.26 (2.39)	1.35 (1.48)																					7.4(8.4)	
	1/33	2.04 (2.17)	1.13 (1.26)																					1.8(2.4)	
	1/45	2.04 (2.16)	1.13 (1.25)																					1.9(2.5)	


1. ()
2.
3. (+)
4. 가

가 1-3mm 가

MELSERVO J2 Super

HC-KFS (B)G7
HC-MFS (B)G7

가

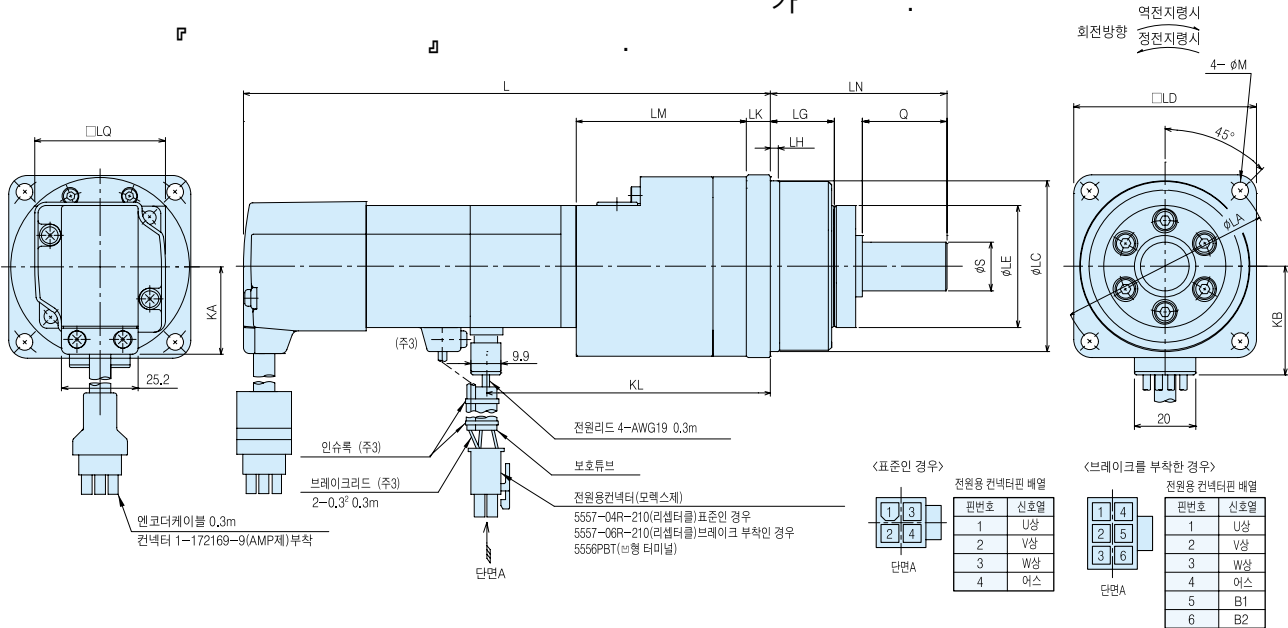

(: mm)

		J(× 10 ⁻⁴ kg · m ²)				L	LA	LC	LD	LE	S	LG	LH	Q	LN	LK	LM	KL	M	KA	KB	LQ	(kg)
		HC-KFS (B)G7	HC-MFS (B)G7	HC-KFS (B)G7	HC-MFS (B)G7																		
HC - KFS053(B)G7 HC - MFS053(B)G7	1/5	0.127 (0.130)	0.093 (0.096)	145.5(173.5)	70	56h7	60	40	16h7	21	3	28	58	8	56	93.5	5.5	28.7	35.7	42	1.2(1.6)		
	1/11	0.114 (0.117)	0.080 (0.083)																				
	1/21	0.104 (0.107)	0.070 (0.073)																				
	1/33	0.098 (0.101)	0.064 (0.067)																				
HC - KFS13(B)G7 HC - MFS13(B)G7	1/45	0.098 (0.101)	0.064 (0.067)	160.5(188.5)	105	85h7	90	59	25h7	27	8	42	80	10	56.5	111	9	1.4(1.7)	1.4(1.8)	2.9(3.3)			
	1/5	0.158 (0.161)	0.104 (0.106)																				
	1/11	0.145 (0.148)	0.091 (0.093)																				
	1/21	0.135 (0.138)	0.081 (0.083)																				
HC - KFS23(B)G7 HC - MFS23(B)G7	1/33	0.147 (0.150)	0.093 (0.095)	163.5(195.5)	70	56h7	60	40	16h7	21	3	28	58	8	56	113.1	5.5	38.4	42.8	62	1.9(2.5)	2.0(2.6)	
	1/5	0.145 (0.148)	0.091 (0.093)																				
	1/11	0.463 (0.513)	0.291 (0.339)																				
	1/21	0.467 (0.517)	0.295 (0.343)																				
HC - KFS43(B)G7 HC - MFS43(B)G7	1/33	0.713 (0.763)	0.541 (0.589)	170.5(202.5)	105	85h7	90	59	25h7	27	8	42	80	10	61	120.1	9	3.9(4.5)	2.4(3.0)	4.4(5.0)			
	1/5	0.467 (0.517)	0.295 (0.343)																				
	1/11	0.463 (0.513)	0.291 (0.339)																				
	1/21	0.760 (0.810)	0.588 (0.636)																				
HC - KFS73(B)G7 HC - MFS73(B)G7	1/45	0.711 (0.761)	0.539 (0.587)	207.5(239.5)	135	115h7	120	84	40h7	35	13	82	133	13	70	155.1	11	7.5(8.1)	5.4(6.4)	5.7(6.7)			
	1/5	0.667 (0.717)	0.350 (0.398)																				
	1/11	1.04 (1.09)	0.727 (0.775)																				
	1/21	0.960 (1.01)	0.643 (0.691)																				
HC - KFS73(B)G7 HC - MFS73(B)G7	1/33	1.02 (1.07)	0.699 (0.747)	220(255.5)	105	85h7	90	59	25h7	27	8	42	80	10	68	164.7	9	48.7	58.1	82	5.4(6.4)	5.7(6.7)	
	1/5	1.01 (1.06)	0.690 (0.738)																				
	1/11	2.20 (2.32)	1.29 (1.41)																				
	1/21	2.08 (2.20)	1.17 (1.29)																				
HC - KFS73(B)G7 HC - MFS73(B)G7	1/33	2.05 (2.17)	1.14 (1.26)	230(265.5)	135	115h7	120	84	40h7	35	13	82	133	13	75	174.7	11	8.8(9.8)					
	1/45	2.04 (2.17)	1.13 (1.26)																				


1. ()
2. ()
3. ()
4. (+)
5. 가

가

1-3mm


가

HC-KFS46

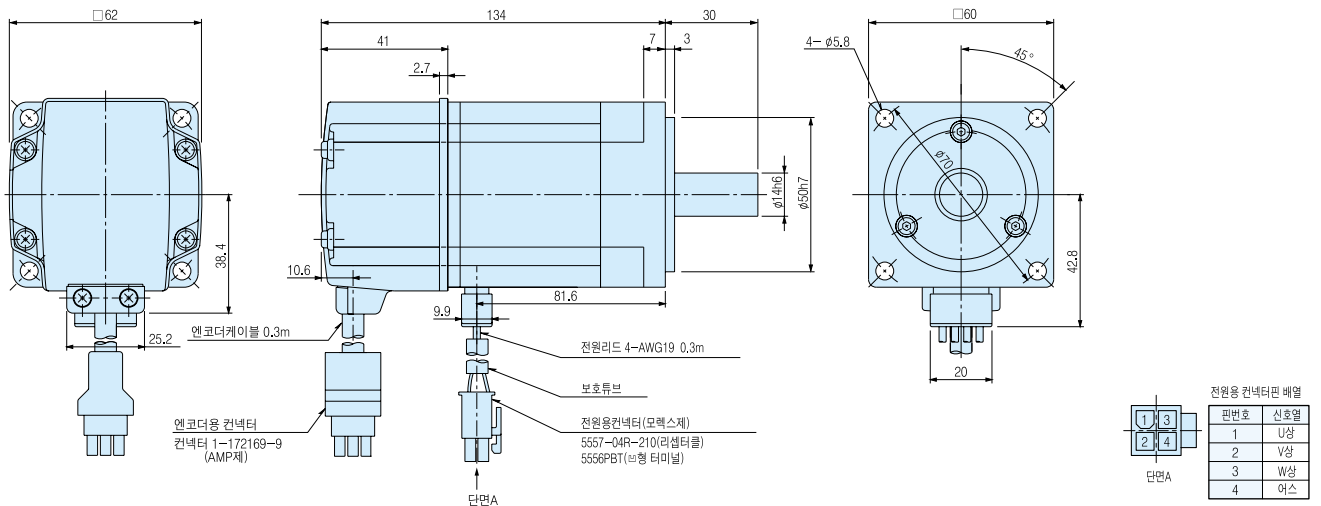

(: mm)


HC-KFS410

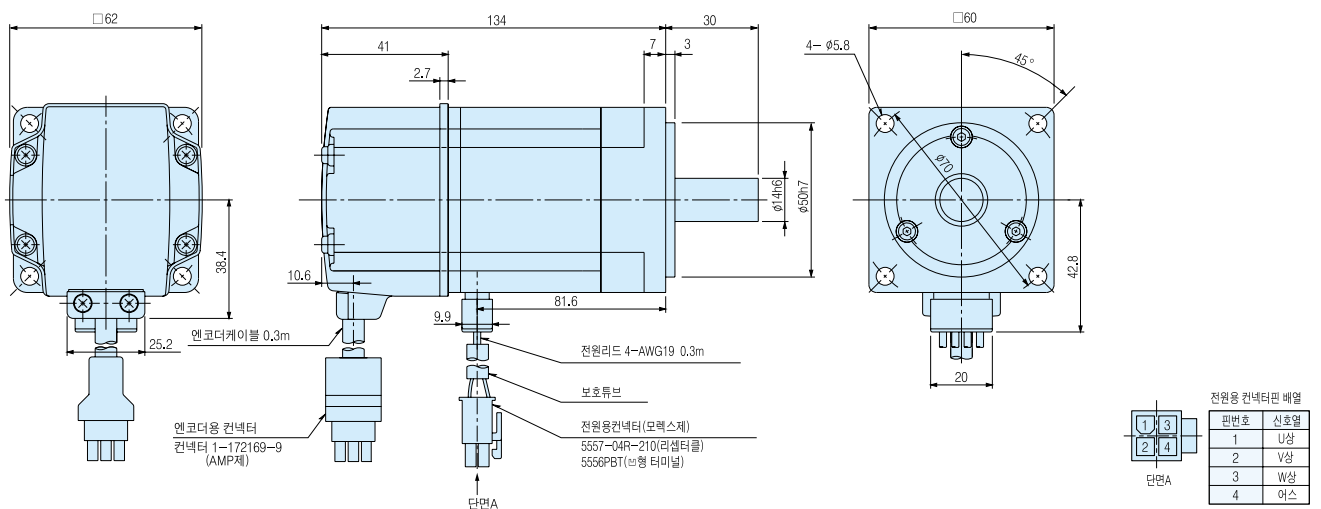

(: mm)

1. ()
2. 가 .


HC-SFS81(B)
 HC-SFS52(4)(B) ~ HC-SFS152(4)(B)
 HC-SFS53(B) ~ HC-SFS153(B)

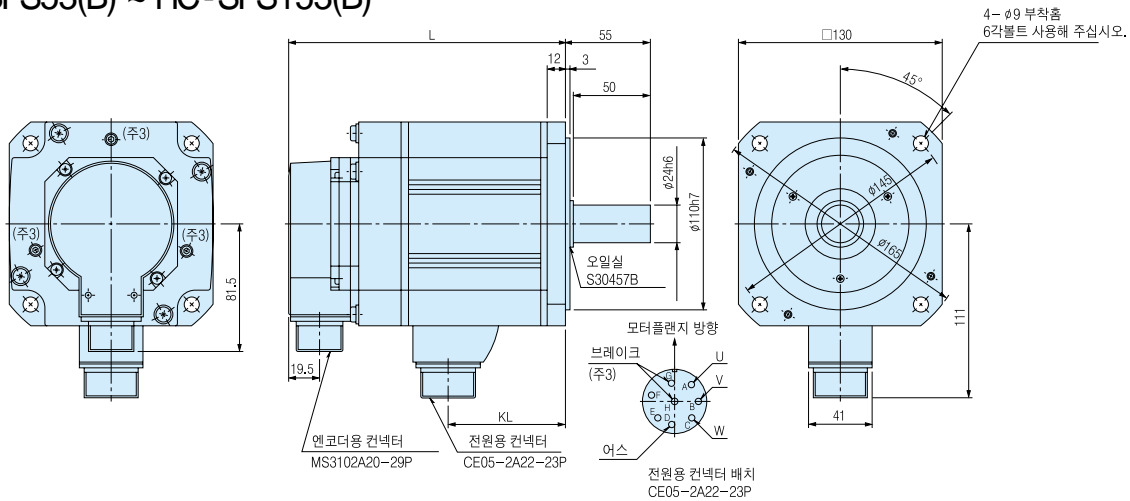

1000r/min	2000r/min	3000r/min	L	KL
-	HC-SFS52(4)(B)	HC-SFS53(B)	120(153)	51.5
-	HC-SFS102(4)(B)	HC-SFS103(B)	145(178)	76.5
HC-SFS81(B)	HC-SFS152(4)(B)	HC-SFS153(B)	170(203)	101.5

(: mm)

HC-SFS121(B) ~ HC-SFS301(B)
 HC-SFS202(4)(B) ~ HC-SFS702(4)(B)
 HC-SFS203(B), HC-SFS353(B)

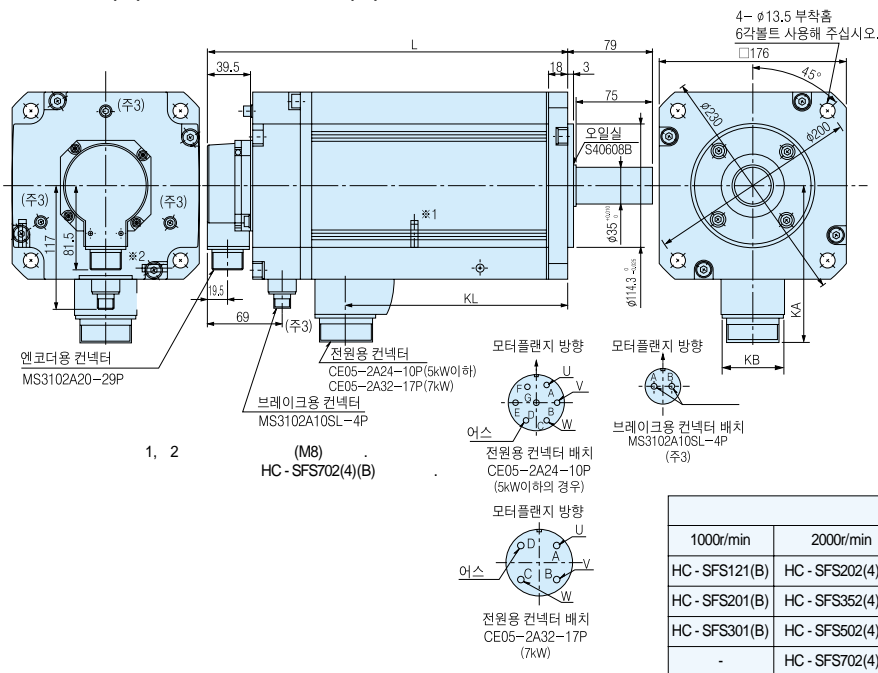


1000r/min	2000r/min	3000r/min	L	KL	KA	KB
HC-SFS121(B)	HC-SFS202(4)(B)	HC-SFS203(B)	145(193)	68.5	142	46
HC-SFS201(B)	HC-SFS352(4)(B)	HC-SFS353(B)	187(235)	110.5	142	46
HC-SFS301(B)	HC-SFS502(4)(B)	-	208(256)	131.5	142	46
-	HC-SFS702(4)(B)	-	292(340)	210.5	150	58

(: mm)

1. () 가
2. () 가
3. 가
4. 가

HC-SFS (B)G1H()

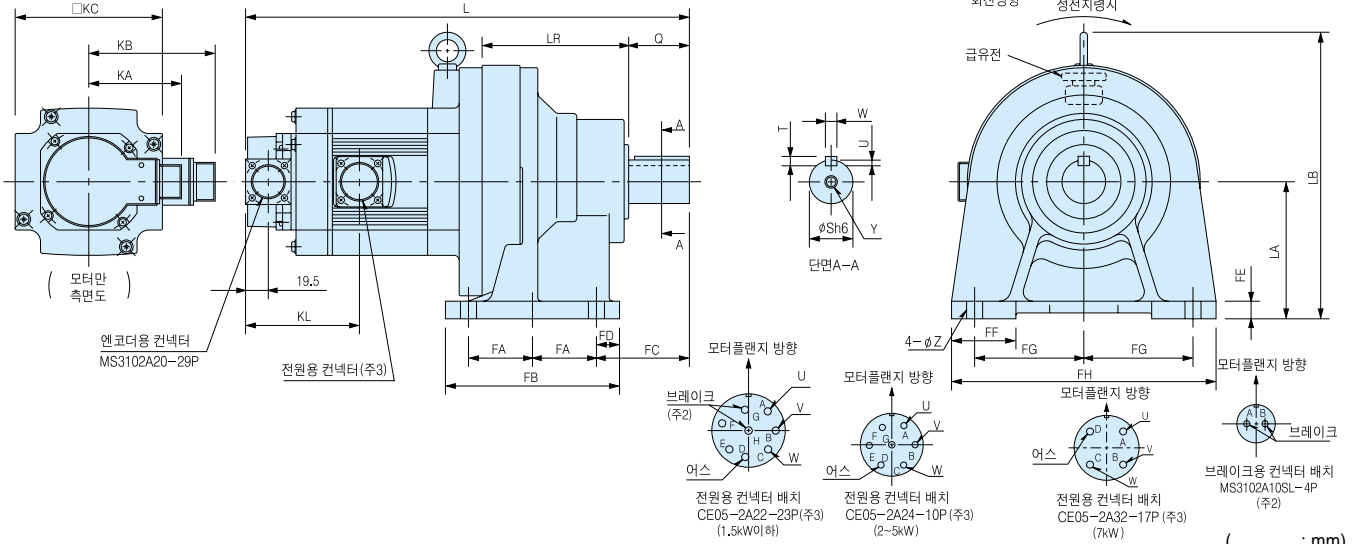


		J(x 10 ⁻⁴ kg · m ²)		L																	Y	(kg)					
		L	LA	LB	LR	KL	KA	KB	KC	Z	FA	FB	FC	FD	FE	FF	FG	FH	Q	S			T	U	V	W	
HC - SFS52(4)(B)G1H	1/6	7.33 (9.03)	325(358)	100	219	121	68.5(101.5)	81.5	111	130	11	45	135	60	15	12	40	75	180	35	28	7	4	8	-	21(23)	
	1/11	6.95 (8.65)	325(358)	100	219	121	68.5(101.5)	81.5	111	130	11	45	135	60	15	12	40	75	180	35	28	7	4	8	-	21(23)	
	1/17	6.85 (8.55)	325(358)	100	219	121	68.5(101.5)	81.5	111	130	11	45	135	60	15	12	40	75	180	35	28	7	4	8	-	21(23)	
	1/29	6.78 (8.48)	325(358)	100	219	121	68.5(101.5)	81.5	111	130	11	45	135	60	15	12	40	75	180	35	28	7	4	8	-	21(23)	
	1/35	7.5 (9.2)	338(371)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	28(33)	
	1/43	7.45 (9.15)	338(371)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	28(33)	
1/59	7.43 (9.13)	338(371)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	28(33)		
HC - SFS102(4)(B)G1H	1/6	16.8 (18.5)	363(396)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	30(35)	
	1/11	15.3 (17.0)	363(396)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	30(35)	
	1/17	14.9 (16.6)	363(396)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	30(35)	
	1/29	14.6 (16.3)	363(396)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	30(35)	
	1/35	14.6 (16.3)	363(396)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	30(35)	
	1/43	15.7 (17.4)	416(449)	150	295	170	68.5(101.5)	81.5	111	130	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	51(53)
1/59	19.5 (21.2)	488(521)	160	352	218	68.5(101.5)	81.5	111	130	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	90(92)	
HC - SFS152(4)(B)G1H	1/6	20.8 (22.5)	388(421)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	32(37)	
	1/11	21.5 (23.2)	388(421)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	32(37)	
	1/17	21.2 (22.9)	388(421)	120	252	131	68.5(101.5)	81.5	111	130	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	32(37)	
	1/29	22.1 (23.8)	441(474)	150	295	170	68.5(101.5)	81.5	111	130	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	53(55)
	1/35	22.0 (23.7)	441(474)	150	295	170	68.5(101.5)	81.5	111	130	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	53(55)
	1/43	25.8 (27.5)	513(546)	160	352	218	68.5(101.5)	81.5	111	130	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	92(94)
1/59	25.7 (27.4)	513(546)	160	352	218	68.5(101.5)	81.5	111	130	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	92(94)	
HC - SFS202(4)(B)G1H	1/6	45.6 (55.6)	381(429)	120	262	131	76.5(124.5)	81.5	142	176	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	35(41)	
	1/11	44.1 (54.1)	381(429)	120	262	131	76.5(124.5)	81.5	142	176	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	35(41)	
	1/17	43.7 (53.7)	381(429)	120	262	131	76.5(124.5)	81.5	142	176	14	57.5	155	82	20	15	55	95	230	55	38	8	5	10	-	35(41)	
	1/29	48.9 (58.9)	498(546)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	91(97)
	1/35	48.6 (58.6)	498(546)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	91(97)
	1/43	48.4 (58.4)	498(546)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	91(97)
1/59	48.3 (58.3)	498(546)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	91(97)	
HC - SFS352(4)(B)G1H	1/6	90.1 (100.1)	473(521)	150	292	170	76.5(124.5)	81.5	142	176	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	60(66)
	1/11	86.2 (96.2)	473(521)	150	292	170	76.5(124.5)	81.5	142	176	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	60(66)
	1/17	85.0 (95.0)	473(521)	150	292	170	76.5(124.5)	81.5	142	176	18	72.5	195	100	25	22	65	145	330	70	50	9	5.5	14	M10	18	60(66)
	1/29	88.4 (98.4)	540(588)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	98(104)
	1/35	88.1 (98.1)	540(588)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	98(104)
	1/43	106.5 (116.5)	584(632)	200	381	262	76.5(124.5)	81.5	142	176	22	137.5	335	125	30	30	80	190	430	90	70	12	7.5	20	M12	24	139(145)
1/59	105.9 (115.9)	584(632)	200	381	262	76.5(124.5)	81.5	142	176	22	137.5	335	125	30	30	80	190	430	90	70	12	7.5	20	M12	24	139(145)	
HC - SFS502(4)(B)G1H	1/11	113.4 (123.4)	561(609)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	102(108)
	1/17	109.4 (119.4)	561(609)	160	341	218	76.5(124.5)	81.5	142	176	18	75	238	139	44	25	75	185	410	90	60	11	7	18	M10	18	102(108)
	1/29	138.5 (148.5)	645(693)	220	405	279	76.5(124.5)	81.5	142	176	22	160	380	145	30	30	85	210	470	110	80	14	9	22	M12	24	171(177)
	1/35	138 (148)	645(693)	220	405	279	76.5(124.5)	81.5	142	176	22	160	380	145	30	30	85	210	470	110	80	14	9	22	M12	24	171(177)
	1/43	137 (147)	645(693)	220	405	279	76.5(124.5)	81.5	142	176	22	160	380	145	30	30	85	210	470	110	80	14	9	22	M12	24	171(177)
	1/59	199 (209)	689(737)	200	381	262	81.5(129.5)	81.5	150	176	22	137.5	335	125	30	30	80	190	430	90	70	12	7.5	20	M12	24	138(144)
HC - SFS702(4)(B)G1H	1/17	190 (200)	689(737)	200	381	262	81.5(129.5)	81.5	150	176	22	137.5	335	125	30	30	80	190	430	90	70	12	7.5	20	M12	24	138(144)
	1/29	197.5 (207.5)	729(777)	220	405	279	81.5(129.5)	81.5	150	176	22	160	380	145	30	30	85	210	470	110	80	14	9	22	M12	24	180(186)
	1/35	197 (207)	729(777)	220	405	279	81.5(129.5)	81.5	150	176	22	160	380	145	30	30	85	210	470	110	80	14	9	22	M12	24	180(186)
	1/43	257 (267)	820(868)	250	465	330	81.5(129.5)	81.5	150	176	26	190	440	170	30	35	90	240	530	135	95	14	9	25	M20	34	261(267)

1. ()
- 2.
- 3.
4. (+)
5. HC-SFS (B)G1H
6. 가

가 , 1~3mm 가


HC-SFS (B)G1()

가 가

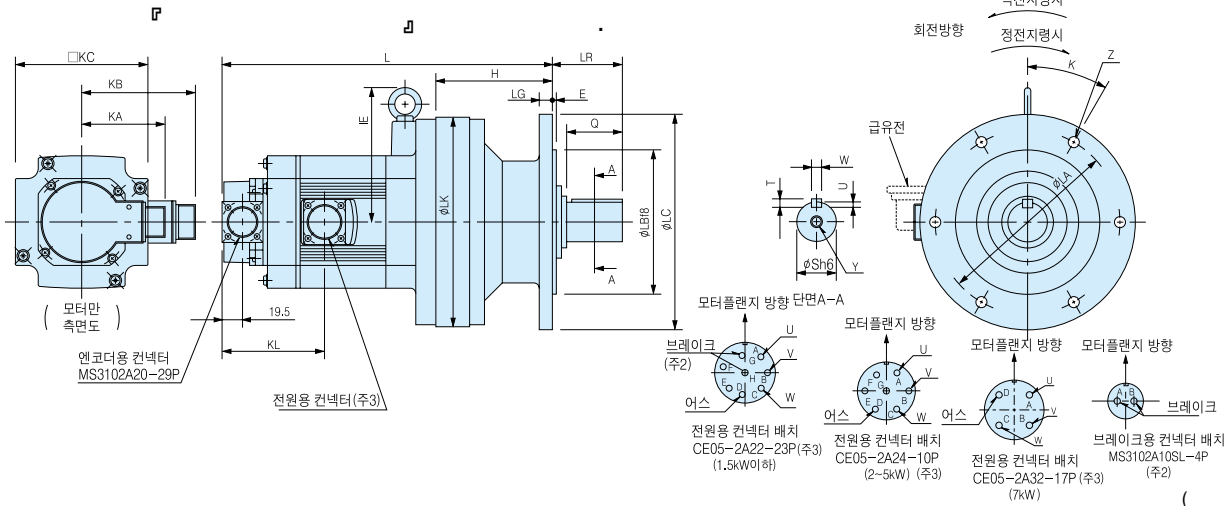

		J($\times 10^{-4}$ kg·m ²)																		(kg)						
			L	LA	LB	LC	LG	LK	LR	IE	KL	Z	K	E	H	KA	KB	KC	Q		S	T	U	W	Y	
HC-SFS52(4)(B)G1	1/6	7.33 (9.03)	277(310)	134	110	160	9	150	48	119	68.5(101.5)	4- ϕ 11	45°	3	108	81.5	111	130	35	28	7	4	8	-	18.5(20.5)	
	1/11	6.95 (8.65)	277(310)	134	110	160	9	150	48	119	68.5(101.5)	4- ϕ 11	45°	3	108	81.5	111	130	35	28	7	4	8	-	18.5(20.5)	
	1/17	6.85 (8.55)	277(310)	134	110	160	9	150	48	119	68.5(101.5)	4- ϕ 11	45°	3	108	81.5	111	130	35	28	7	4	8	-	18.5(20.5)	
	1/29	6.78 (8.48)	277(310)	134	110	160	9	150	48	119	68.5(101.5)	4- ϕ 11	45°	3	108	81.5	111	130	35	28	7	4	8	-	18.5(20.5)	
	1/35	7.5 (9.2)	269(302)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	27(32.5)	
HC-SFS102(4)(B)G1	1/43	7.45 (9.15)	269(302)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	27(32.5)	
	1/59	7.43 (9.13)	269(302)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	27(32.5)	
	1/6	16.8 (18.5)	294(327)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	29(34.5)	
	1/11	15.3 (17.0)	294(327)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	29(34.5)	
	1/17	14.9 (16.6)	294(327)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	29(34.5)	
HC-SFS152(4)(B)G1	1/29	14.6 (16.3)	294(327)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	29(34.5)	
	1/35	14.6 (16.3)	294(327)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	29(34.5)	
	1/43	15.7 (17.4)	340(373)	230	200	260	15	230	76	145	68.5(101.5)	6- ϕ 11	60°	4	164	81.5	111	130	70	50	9	5.5	14	M10	18	48(50)
	1/59	19.5 (21.2)	399(432)	310	270	340	20	300	89	192	68.5(101.5)	6- ϕ 11	60°	4	219	81.5	111	130	90	60	11	7	18	M10	18	83(85)
	1/6	20.8 (22.5)	319(352)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	31(36.5)	
HC-SFS202(4)(B)G1	1/11	21.5 (23.2)	319(352)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	31(36.5)	
	1/17	21.2 (22.9)	319(352)	180	140	210	13	204	69	132	68.5(101.5)	6- ϕ 11	30°	4	117	81.5	111	130	55	38	8	5	10	-	31(36.5)	
	1/29	22.1 (23.8)	365(398)	230	200	260	15	230	76	145	68.5(101.5)	6- ϕ 11	60°	4	164	81.5	111	130	70	50	9	5.5	14	M10	18	50(52)
	1/35	22.0 (23.7)	365(398)	230	200	260	15	230	76	145	68.5(101.5)	6- ϕ 11	60°	4	164	81.5	111	130	70	50	9	5.5	14	M10	18	50(52)
	1/43	25.8 (27.5)	424(457)	310	270	340	20	300	89	192	68.5(101.5)	6- ϕ 11	60°	4	219	81.5	111	130	90	60	11	7	18	M10	18	85(87)
HC-SFS252(4)(B)G1	1/59	25.7 (27.4)	424(457)	310	270	340	20	300	89	192	68.5(101.5)	6- ϕ 11	60°	4	219	81.5	111	130	90	60	11	7	18	M10	18	85(87)
	1/6	45.6 (55.6)	312(360)	180	140	210	13	204	69	142	76.5(124.5)	6- ϕ 11	30°	4	117	81.5	142	176	55	38	8	5	10	-	34(40)	
	1/11	44.1 (54.1)	312(360)	180	140	210	13	204	69	142	76.5(124.5)	6- ϕ 11	30°	4	117	81.5	142	176	55	38	8	5	10	-	34(40)	
	1/17	43.7 (53.7)	312(360)	180	140	210	13	204	69	142	76.5(124.5)	6- ϕ 11	30°	4	117	81.5	142	176	55	38	8	5	10	-	34(40)	
	1/29	48.9 (58.9)	409(457)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	84(90)
HC-SFS352(4)(B)G1	1/35	48.6 (58.6)	409(457)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	84(90)
	1/43	48.4 (58.4)	409(457)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	84(90)
	1/59	48.3 (58.3)	409(457)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	84(90)
	1/6	90.1 (100.1)	397(445)	230	200	260	15	230	76	142	76.5(124.5)	6- ϕ 11	60°	4	164	81.5	142	176	70	50	9	5.5	14	M10	18	57(63)
	1/11	86.2 (96.2)	397(445)	230	200	260	15	230	76	142	76.5(124.5)	6- ϕ 11	60°	4	164	81.5	142	176	70	50	9	5.5	14	M10	18	57(63)
HC-SFS502(4)(B)G1	1/17	85.0 (95.0)	397(445)	230	200	260	15	230	76	142	76.5(124.5)	6- ϕ 11	60°	4	164	81.5	142	176	70	50	9	5.5	14	M10	18	57(63)
	1/29	88.4 (98.4)	451(499)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	91(97)
	1/35	88.1 (98.1)	451(499)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	90	60	11	7	18	M10	18	91(97)
	1/43	106.5 (116.5)	490(538)	360	316	400	22	340	94	181	76.5(124.5)	8- ϕ 14	22.5°	5	258	81.5	142	176	90	70	12	7.5	20	M12	24	133(139)
	1/59	105.9 (115.9)	490(538)	360	316	400	22	340	94	181	76.5(124.5)	8- ϕ 14	22.5°	5	258	81.5	142	176	90	70	12	7.5	20	M12	24	133(139)
HC-SFS702(4)(B)G1	1/11	113.4 (123.4)	472(520)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	89	60	11	7	18	M10	18	95(101)
	1/17	109.4 (119.4)	472(520)	310	270	340	20	300	89	181	76.5(124.5)	6- ϕ 11	60°	4	219	81.5	142	176	89	60	11	7	18	M10	18	95(101)
	1/29	138.5 (148.5)	535(583)	390	345	430	22	370	110	176	76.5(124.5)	8- ϕ 18	22.5°	5	279	81.5	142	176	105	80	14	9	22	M12	24	162(168)
	1/35	138 (148)	535(583)	390	345	430	22	370	110	176	76.5(124.5)	8- ϕ 18	22.5°	5	279	81.5	142	176	105	80	14	9	22	M12	24	162(168)
HC-SFS102(4)(B)G1	1/43	137 (147)	535(583)	390	345	430	22	370	110	176	76.5(124.5)	8- ϕ 18	22.5°	5	279	81.5	142	176	105	80	14	9	22	M12	24	162(168)
	1/11	199 (209)	595(643)	360	316	400	22	340	94	181	81.5(129.5)	8- ϕ 14	22.5°	5	258	81.5	150	176	90	70	12	7.5	20	M12	24	146(152)
	1/17	190 (200)	595(643)	360	316	400	22	340	94	181	81.5(129.5)	8- ϕ 14	22.5°	5	258	81.5	150	176	90	70	12	7.5	20	M12	24	146(152)
	1/29	197.5 (207.5)	619(667)	390	345	430	22	370	110	176	81.5(129.5)	8- ϕ 18	22.5°	5	279	81.5	150	176	105	80	14	9	22	M12	24	171(177)
HC-SFS152(4)(B)G1	1/35	197 (207)	619(667)	390	345	430	22	370	110	176	81.5(129.5)	8- ϕ 18	22.5°	5	279	81.5	150	176	105	80	14	9	22	M12	24	171(177)
	1/43	257 (267)	675(723)	450	400	490	30	430	145	210	81.5(129.5)	12- $\$														

HC-SFS (B)G2

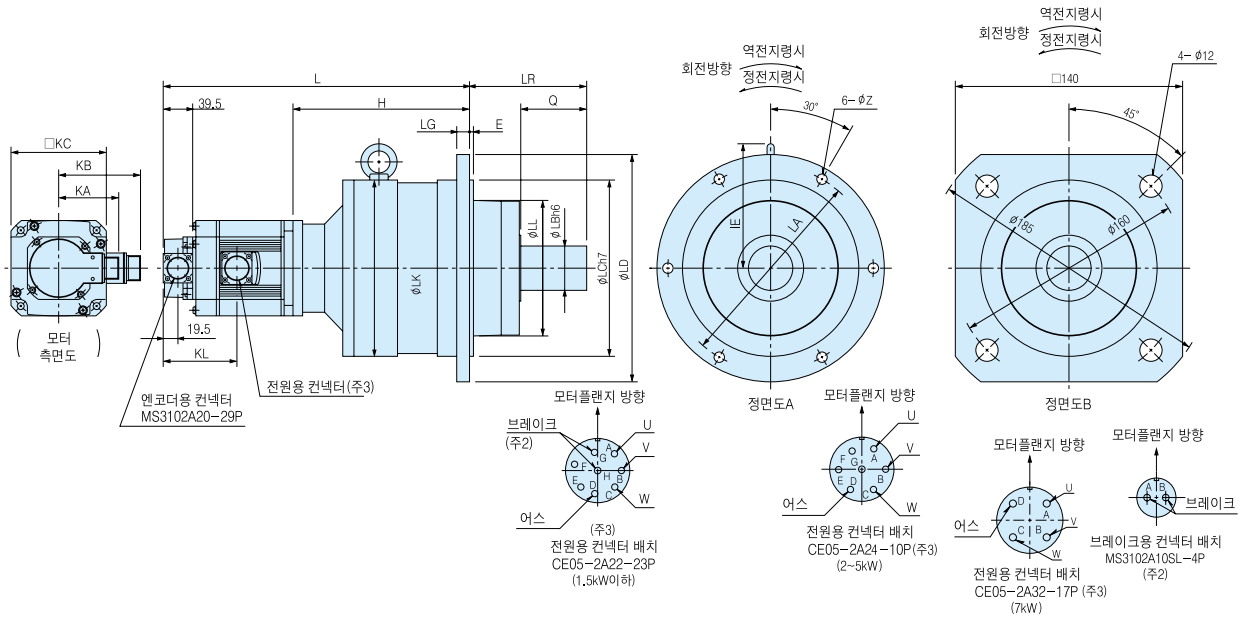

(: mm)

		J (x 10 ⁻⁴ kg · m ²)																		(kg)		
			L	LA	LB	LC	LD	LG	LK	LL	LR	IE	KL	Z	E	H	KA	KB	KC		Q	
HC - SFS52(4)(B)G2	1/5	7.9 (9.6)	276(309)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	156	81.5	111	130	55	B	13(15)
	1/9	7.55 (9.25)	288(321)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	168	81.5	111	130	55	B	13(15)
	1/20	8.03 (9.73)	309(342)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	189	81.5	111	130	55	B	15(17)
	1/29	9.4 (11.1)	337(370)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	217	81.5	111	130	75	A	30(32)
HC - SFS102(4)(B)G2	1/45	8.43 (10.1)	343(376)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	223	81.5	111	130	75	A	30(32)
	1/5	15.0 (16.7)	301(334)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	156	81.5	111	130	55	B	15(17)
	1/9	14.6 (16.3)	313(346)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	168	81.5	111	130	55	B	15(17)
	1/20	18.4 (20.1)	362(395)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	217	81.5	111	130	75	A	32(34)
HC - SFS152(4)(B)G2	1/29	16.5 (18.2)	362(395)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	217	81.5	111	130	75	A	32(34)
	1/45	20.3 (22.0)	389(422)	280	60	240	310	18	240	186	160	171	68.5(101.5)	14	5	244	81.5	111	130	90	A	52(54)
	1/5	21.2 (22.9)	326(359)	-	35	130	-	12	132	94	100	-	68.5(101.5)	-	3	156	81.5	111	130	55	B	17(19)
	1/9	24.7 (26.4)	379(412)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	209	81.5	111	130	75	A	34(36)
HC - SFS202(4)(B)G2	1/20	24.6 (26.3)	387(420)	220	50	190	245	15	190	135	140	137	68.5(101.5)	12	5	217	81.5	111	130	75	A	34(36)
	1/29	30.3 (32.0)	411(444)	280	60	240	310	18	240	186	160	171	68.5(101.5)	14	5	241	81.5	111	130	90	A	54(56)
	1/45	26.5 (28.2)	414(447)	280	60	240	310	18	240	186	160	171	68.5(101.5)	14	5	244	81.5	111	130	90	A	54(56)
	1/5	49.6 (59.6)	348(396)	220	50	190	245	15	190	135	140	137	76.5(124.5)	12	5	203	81.5	142	176	75	A	30(36)
HC - SFS352(4)(B)G2	1/9	47.2 (57.2)	375(423)	220	50	190	245	15	190	135	140	137	76.5(124.5)	12	5	230	81.5	142	176	75	A	37(43)
	1/20	59.6 (69.6)	407(455)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	262	81.5	142	176	90	A	57(63)
	1/29	52.8 (62.8)	407(455)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	262	81.5	142	176	90	A	57(63)
	1/45	49.1 (59.1)	410(458)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	265	81.5	142	176	90	A	57(63)
HC - SFS502(4)(B)G2	1/5	99.4 (109.4)	410(458)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	223	81.5	142	176	90	A	54(60)
	1/9	91.5 (101.5)	442(490)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	255	81.5	142	176	90	A	64(70)
HC - SFS702(4)(B)G2	1/20	99.1 (109.1)	449(497)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	262	81.5	142	176	90	A	64(70)
	1/5	118.4 (128.4)	431(479)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	223	81.5	142	176	90	A	58(64)
HC - SFS502(4)(B)G2	1/9	110.5 (120.5)	463(511)	280	60	240	310	18	240	186	160	171	76.5(124.5)	14	5	255	81.5	142	176	90	A	68(74)
	1/5	177.4 (187.4)	515(563)	280	60	240	310	18	240	186	160	171	81.5(129.5)	14	5	223	81.5	150	176	90	A	67(73)

1. ()
- 2.
- 3.
- 4.
5. 가

(+)

HC - SFS (B)


가

1~3mm

가

HC-SFS (B)G5

가

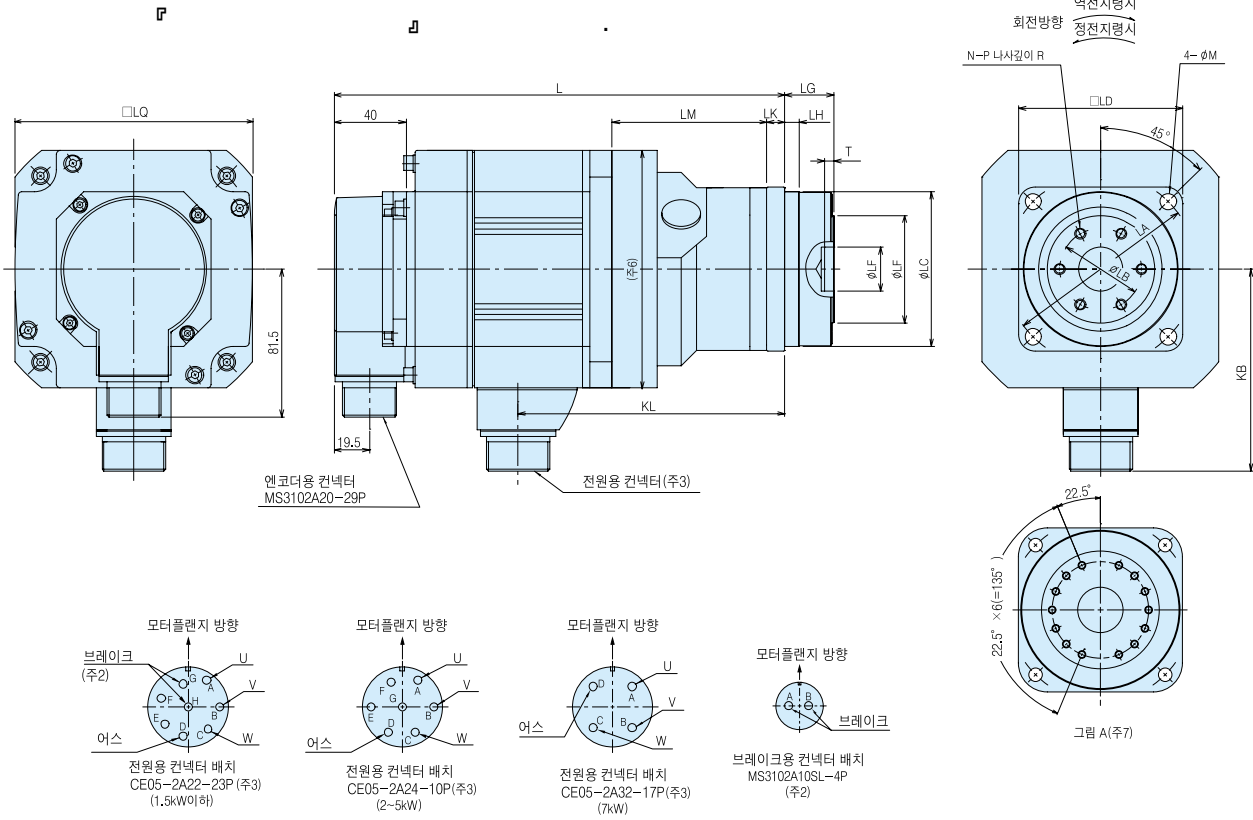

(: mm)

		J (x 10 ⁻⁴ kg · m ²)	가																(kg)								
			L	LA	LB	LC	LD	LE	LF	LG	LH	LK	LM	KL	T	N	P	R		M	KB	LQ					
HC - SFS52(4)(B)G5	1/5	7.25 (9.25)	215(248)	105	45	85h7	90	59	24H7	27 ^{+0.4} _{-0.5}	8	10	85	146.5	5	6	M6	10	9	111	130	7.8(9.8)					
	1/11	7.16 (9.16)																								8.0(10.0)	
	1/21	9.50 (11.5)																									11.5(13.5)
	1/33	9.30 (11.3)	227(260)	135	60	115h7	120	84	32H7	35 ^{+0.4} _{-0.5}	13	13	94	158.5					M8			12	11				11.5(13.5)
HC - SFS102(4)(B)G5	1/45	9.30 (11.3)																				9.8(11.8)					
	1/5	14.4 (16.4)	240(273)	105	45	85h7	90	59	24H7	27 ^{+0.4} _{-0.5}	8	10	85	171.5	7	14(7)	M6	10	9	111	130	13.5(15.5)					
	1/11	17.0 (19.0)																									23.0(25.0)
	1/21	16.6 (18.6)																									13.5(15.5)
1/33	18.4 (20.4)	268(301)	190	100	165h8	170	122	47H7	53 ^{+0.5} _{-0.8}	13	16	107	199.5					M8	12			11				23.0(25.0)	
HC - SFS152(4)(B)G5	1/45	18.3 (20.3)																				11.8(13.8)					
	1/5	20.7 (22.7)	265(298)	105	45	85h7	90	59	24H7	27 ^{+0.4} _{-0.5}	8	10	85	196.5	5	6	M6	10	9	111	130	11.8(13.8)					
	1/11	23.3 (25.3)																									15.5(17.5)
	1/21	25.7 (27.7)																									15.5(17.5)
1/33	24.7 (26.7)	293(326)	190	100	165h8	170	122	47H7	53 ^{+0.5} _{-0.8}	13	16	107	224.5									14				25.0(27.0)	
HC - SFS202(4)(B)G5	1/45	24.6 (26.6)																				19.5(25.5)					
	1/5	47.1 (57.1)	274(322)	135	60	115h7	120	84	32H7	35 ^{+0.4} _{-0.5}	13	13	116(6)	197.5	5	6				111	130	19.5(25.5)					
	1/11	46.9 (56.9)																									20.0(26.0)
	1/21	48.9 (58.9)																									20.0(26.0)
1/33	47.9 (57.9)	294(342)	190	100	165h8	170	122	47H7	53 ^{+0.5} _{-0.8}	13	16	133(6)	217.5					M8	12			14				29.1(35.1)	
HC - SFS352(4)(B)G5	1/45	47.9 (57.9)																				26.5(32.5)					
	1/5	86.6 (96.6)	316(364)	135	60	115h7	120	84	32H7	35 ^{+0.4} _{-0.5}	13	13	116(6)	239.5	5	6				111	130	26.5(32.5)					
	1/11	90.1 (100)																									36.1(42.1)
	1/21	88.4 (98.4)	336(384)											259.5													
1/33	111 (121)												280.5														38.6(44.6)
HC - SFS502(4)(B)G5	1/5	109 (119)	357(405)	190	100	165h8	170	122	47H7	53 ^{+0.5} _{-0.8}	13	16	133(6)	280.5	7	14(7)				111	130	38.6(44.6)					
	1/11	109 (119)												280.5													40.1(46.1)
HC - SFS702(4)(B)G5	1/5	170 (180)	441(489)											359.5									47.6(53.6)				
	1/11	170 (180)												359.5									47.6(53.6)				

1. ()
- 2.
- 3.
4. (+)
5. 가
6. LM (6)
7. A


HC-SFS (B)

180 가

1~3mm 가

HC-SFS (B)G7

가

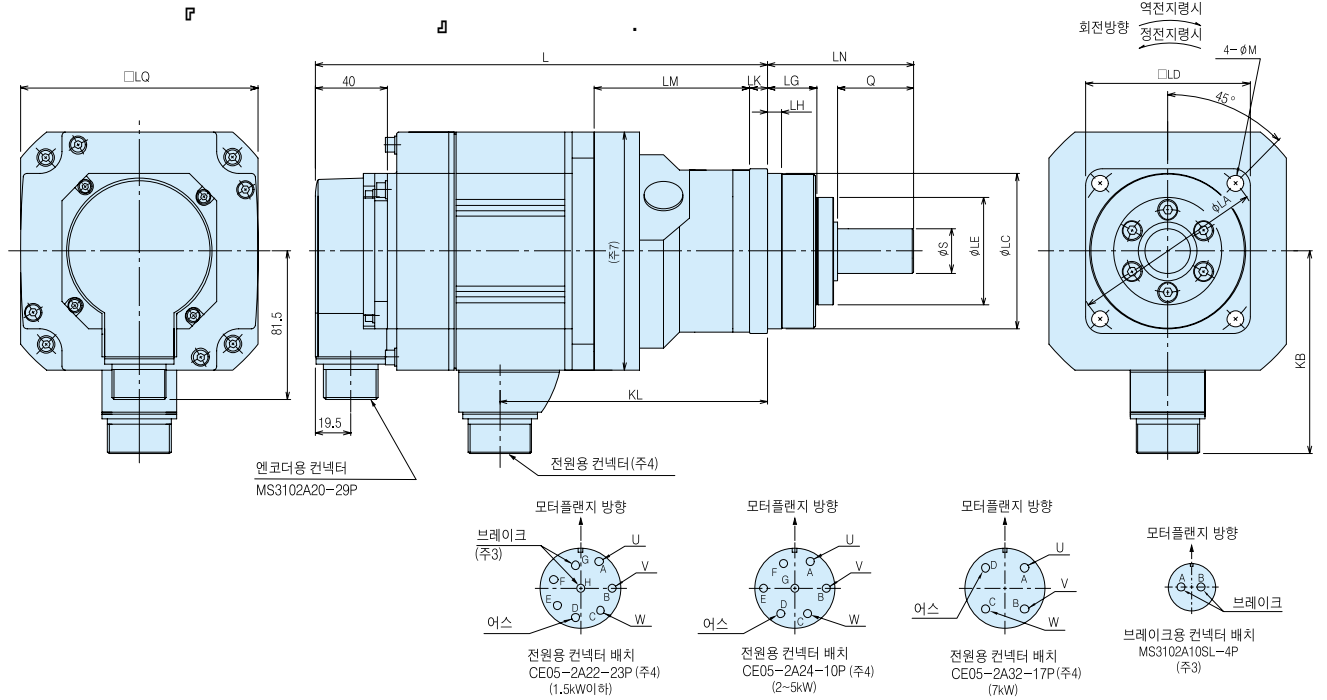


(: mm)

		J($\times 10^{-4}$ kg·m ²)															KB	LQ	(kg)		
			L	LA	LC	LD	LE	S	LG	LH	Q	LN	LK	LM	KL	M					
HC - SFS52(4)(B)G7	1/5	7.29 (9.29)	215(248)	105	85h7	90	59	25h7	27	8	42	80	10	85	146.5	9	111	130	8.2(10.2)		
	1/11	7.16 (9.16)																			8.4(10.4)
	1/21	9.50 (11.5)	227(260)	135	115h7	120	84	40h7	35	13	82	133	13	94	158.5	11					12.9(14.9)
	1/33	9.30 (11.3)																			
	1/45	9.30 (11.3)																			
HC - SFS102(4)(B)G7	1/5	14.4 (16.4)	240(273)	105	85h7	90	59	25h7	27	8	42	80	10	85	171.5	9	111	130	10.2(12.2)		
	1/11	17.1 (19.1)	252(285)	135	115h7	120	84	40h7	35	13	82	133	13	94	183.5	11					14.9(16.9)
	1/21	16.6 (18.6)																			
	1/33	18.4 (20.4)	268(301)	190	165h8	170	122	50h7	53	13	82	156	16	107	199.5	14					26.0(28.0)
	1/45	18.4 (20.4)																			
HC - SFS152(4)(B)G7	1/5	20.7 (22.7)	265(298)	105	85h7	90	59	25h7	27	8	42	80	10	85	196.5	9	111	130	12.2(14.2)		
	1/11	23.4 (25.4)	277(310)	135	115h7	120	84	40h7	35	13	82	133	13	94	208.5	11					16.9(18.9)
	1/21	25.7 (27.7)																			
	1/33	24.7 (26.7)	293(326)	190	165h8	170	122	50h7	53	13	82	156	16	107	224.5	14					28.0(30.0)
	1/45	24.7 (26.7)																			
HC - SFS202(4)(B)G7	1/5	47.4 (57.4)	274(322)	135	115h7	120	84	40h7	35	13	82	133	13	116(7)	197.5	11	142	176	20.9(26.9)		
	1/11	47.0 (57.0)																			21.4(27.4)
	1/21	49.0 (59.0)																			
	1/33	47.9 (57.9)	294(342)	190	165h8	170	122	50h7	53	13	82	156	16	133(7)	217.5	14					32.1(38.1)
	1/45	47.9 (57.9)																			
HC - SFS352(4)(B)G7	1/5	86.9 (96.9)	316(364)	135	115h7	120	84	40h7	35	13	82	133	13	116(7)	239.5	11	142	176	27.9(33.9)		
	1/11	90.4 (100)	336(384)												259.5						39.1(45.1)
HC - SFS502(4)(B)G7	1/5	113 (123)	357(405)	190	165h8	170	122	50h7	53	13	82	156	16	133(7)	280.5	14	150	180	41.6(47.6)		
	1/11	109 (119)																			43.1(49.1)
HC - SFS702(4)(B)G7	1/5	172 (182)	441(489)												359.5		150	180	50.6(56.6)		

1. ()
2. ()
- 3.
4. HC-SFS (B)
5. (+)
6. 가
7. LM (7) 180 가


HC-LFS52(B), HC-LFS102(B), HC-LFS152(B)

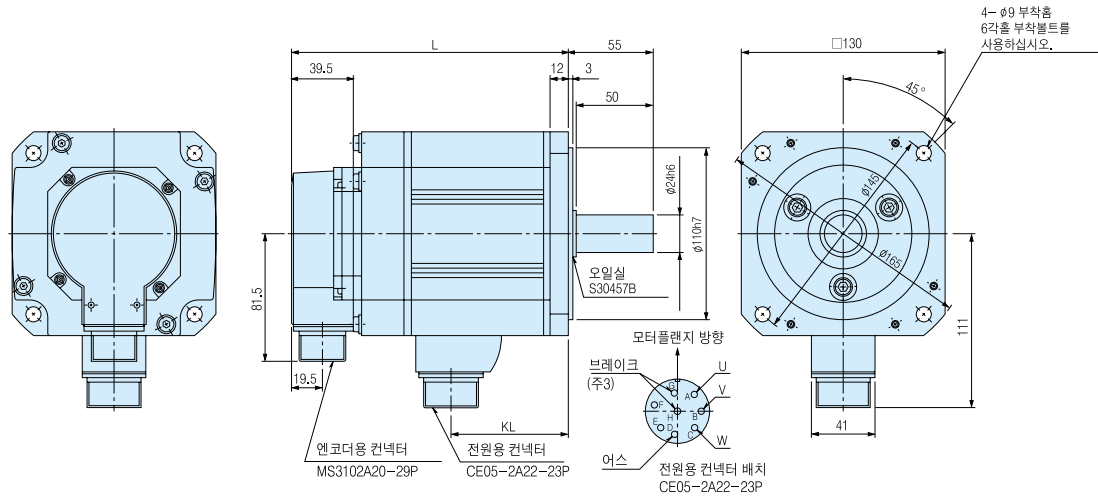

	L	KL
HC-LFS52(B)	145.5(178.5)	77
HC-LFS102(B)	165.5(198.5)	97
HC-LFS152(B)	193(226)	124.5

(: mm)

HC-LFS202(B), HC-LFS302(B)

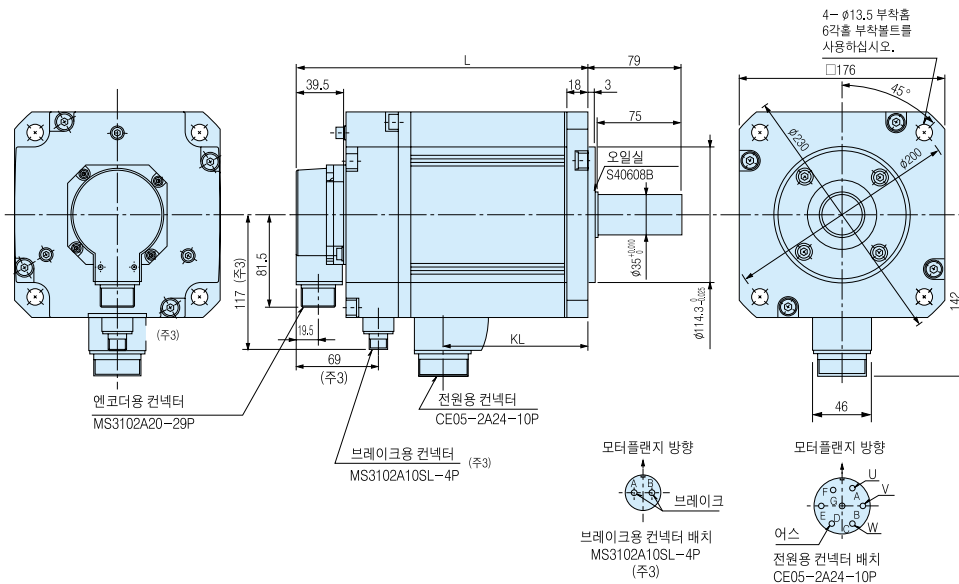


	L	KL
HC-LFS202(B)	200(248)	123.5
HC-LFS302(B)	250(298)	173.5

(: mm)

1. ()
2. ()
3. ()
4. 가


HC-RFS103(B), HC-RFS153(B), HC-RFS203(B)

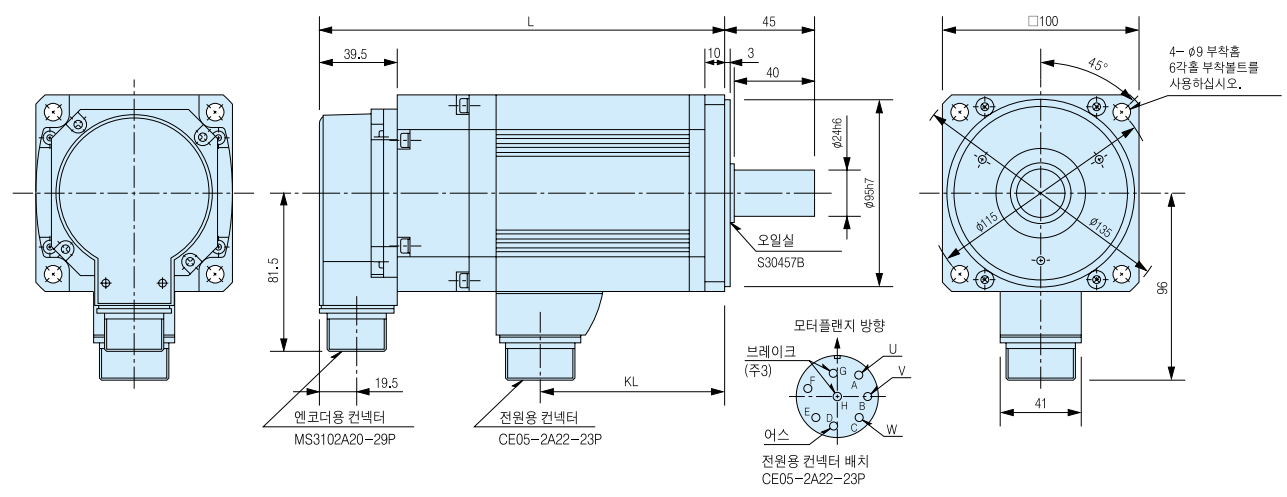

	L	KL
HC-RFS103(B)	147(185)	71
HC-RFS153(B)	172(210)	96
HC-RFS203(B)	197(235)	121

(: mm)

HC-RFS353(B), HC-RFS503(B)

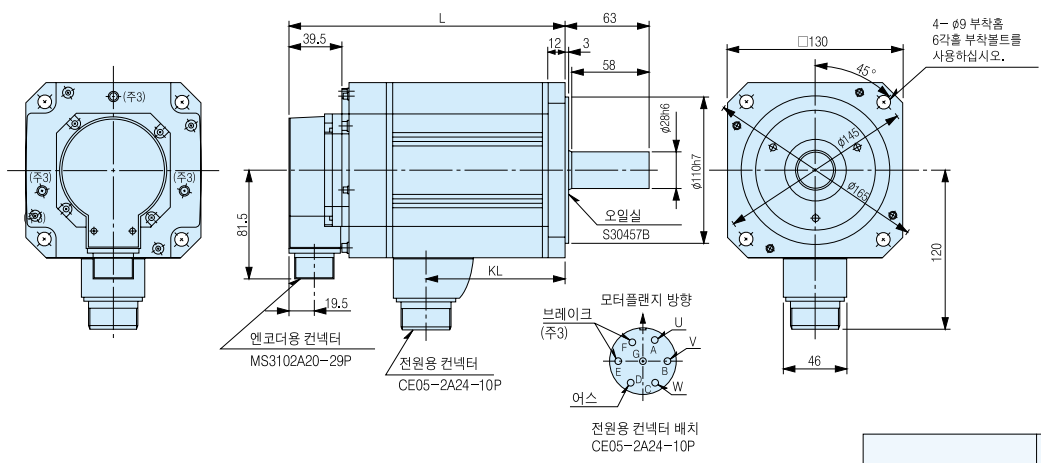


	L	KL
HC-RFS353(B)	214(254)	148
HC-RFS503(B)	274(311)	205

(: mm)

1. ()
2. ()
3. ()
4. 가

HC-RFS (B)G2

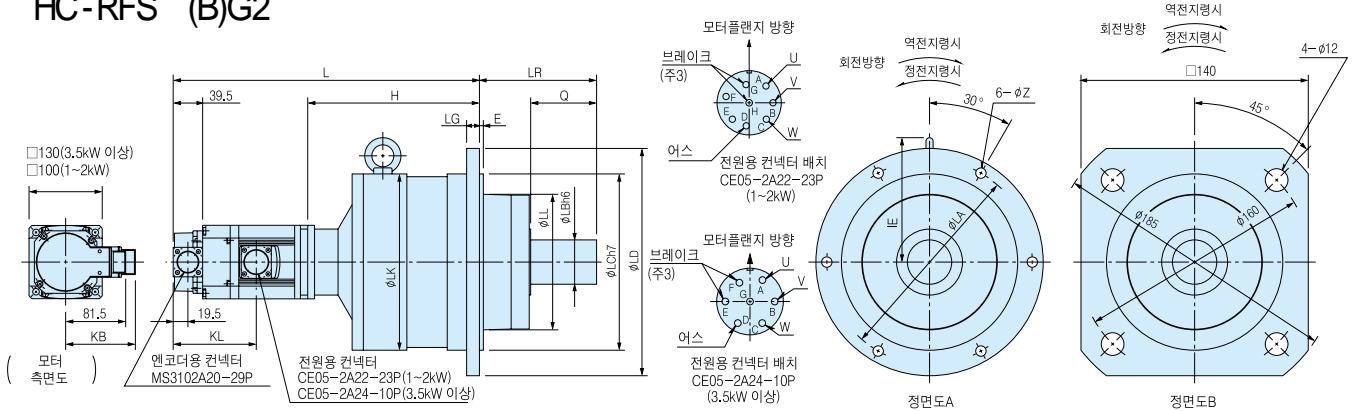

(: mm)


		J ($\times 10^{-4} \text{kg} \cdot \text{m}^2$)														KB	Q		(kg)	
			L	LA	LB	LC	LD	LG	LK	LL	LR	IE	KL	Z	E					H
HC - RFS103(B)G2	1/5	4.95 (5.3)	301(339)	-	35	130	-	12	132	94	100	-	76 (113.5)	-	3	154	96	55	B	11.9(14)
	1/9	4.6 (4.95)	313(351)	-	35	130	-	12	132	94	100	-		-	3	166		55	B	11.9(14)
	1/20	8.35 (8.7)	354(392)	220	50	190	245	15	190	135	140	136.5		12	5	207		75	A	28.9(31)
	1/29	6.45 (6.8)	354(392)	220	50	190	245	15	190	135	140	136.5		12	5	207		75	A	28.9(31)
HC - RFS153(B)G2	1/45	5.48 (5.83)	364(402)	220	50	190	245	15	190	135	140	136.5	12	5	217	75	A	28.9(31)		
	1/5	5.35 (5.7)	326(364)	-	35	130	-	12	132	94	100	-	-	3	154	55	B	13(15.1)		
	1/9	6.68 (7.03)	375(413)	220	50	190	245	15	190	135	140	136.5	12	5	203	75	A	30(32.1)		
	1/20	8.75 (9.1)	379(417)	220	50	190	245	15	190	135	140	136.5	12	5	207	75	A	30(32.1)		
HC - RFS203(B)G2	1/29	6.85 (7.2)	379(417)	220	50	190	245	15	190	135	140	136.5	12	5	207	75	A	30(32.1)		
	1/45	8.55 (8.9)	410(448)	280	60	240	310	18	240	186	160	171	14	5	238	90	A	50(52.1)		
	1/5	5.75 (6.1)	351(389)	-	35	130	-	12	132	94	100	-	-	3	154	55	B	14.2(16.3)		
	1/9	7.08 (7.43)	400(438)	220	50	190	245	15	190	135	140	136.5	12	5	203	75	A	31.2(33.3)		
HC - RFS353(B)G2	1/20	9.15 (9.5)	404(442)	220	50	190	245	15	190	135	140	136.5	12	5	207	75	A	31.2(33.3)		
	1/29	12.7 (13.1)	425(463)	280	60	240	310	18	240	186	160	171	14	5	228	90	A	51.2(53.3)		
	1/45	8.95 (9.3)	435(473)	280	60	240	310	18	240	186	160	171	14	5	238	90	A	51.2(53.3)		
	1/5	18.8 (20.8)	418(455)	220	50	190	245	15	190	135	140	136.5	12	5	201	75	A	30(33)		
HC - RFS503(B)G2	1/9	21.1 (23.1)	470(507)	280	60	240	310	18	240	186	160	171	69.5 (106)	14	5	253	120	90	A	57(60)
	1/20	28.8 (30.8)	470(507)	280	60	240	310	18	240	186	160	171		14	5	253		90	A	57(60)
	1/29	22.0 (24.0)	470(507)	280	60	240	310	18	240	186	160	171		14	5	253		90	A	57(60)
HC - RFS503(B)G2	1/5	32.4 (34.4)	495(532)	280	60	240	310	18	240	186	160	171	14	5	221	90	A	52(56)		
	1/9	24.5 (26.5)	527(564)	280	60	240	310	18	240	186	160	171	14	5	253	90	A	62(66)		
HC - RFS503(B)G2	1/20	32.2 (34.2)	527(564)	280	60	240	310	18	240	186	160	171	14	5	253	90	A	62(66)		

1. ()
2. ()
- 3.
4. (+)
5. 가

가 1-3mm 가

HC-RFS (B)G5

가

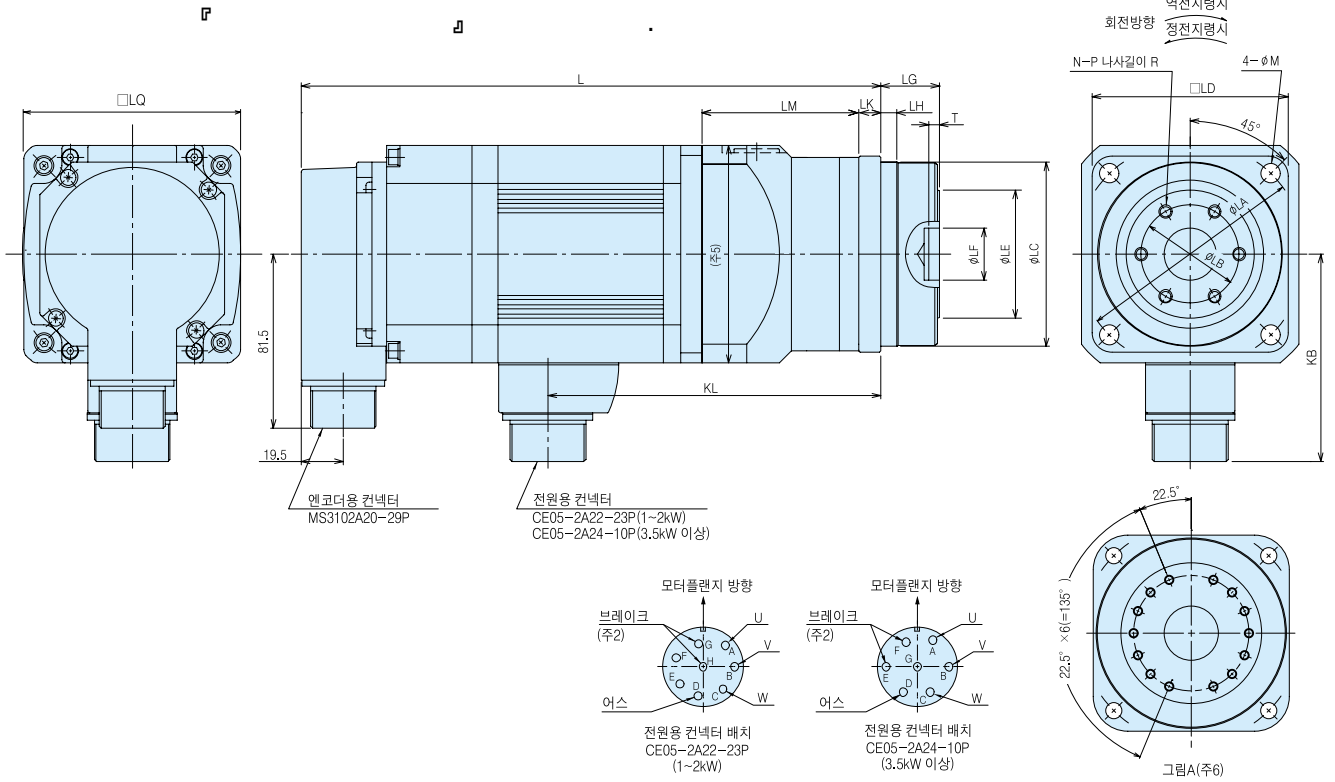

(: mm)

		J ($\times 10^{-4} \text{kg} \cdot \text{m}^2$)	가													P	R	M	KB	LQ	(kg)		
			L	LA	LB	LC	LD	LE	LF	LG	LH	LK	LM	KL	T							N	
HC-RFS103(B)G5	1/5	2.33 (2.68)	229(267)	105	45	85h7	90	59	24H7	27 $^{+0.4}_{-0.5}$	8	10	72	153	5	6	M6	10	9	96	100		6.4(8.5)
	1/11	2.25 (2.60)																					6.6(8.7)
	1/21	4.40 (4.75)																					10.4(12.5)
	1/33	4.20 (4.55)																					14
HC-RFS153(B)G5	1/5	6.10 (6.45)	270(308)	190	100	165h8	170	122	47H7	53 $^{+0.5}_{-0.8}$	13	16	107	194	7	14(6)	M6	10	9	96	100		7.5(9.5)
	1/11	5.20 (5.55)																					11.5(13.5)
	1/21	4.80 (5.15)																					21.0(23.0)
	1/33	6.60 (6.95)																					14
HC-RFS203(B)G5	1/5	2.73 (3.08)	254(292)	105	45	85h7	90	59	24H7	27 $^{+0.4}_{-0.5}$	8	10	72	178	5	6	M6	10	9	96	100		7.5(9.5)
	1/11	5.20 (5.55)																					11.5(13.5)
	1/21	4.80 (5.15)																					21.0(23.0)
	1/33	6.60 (6.95)																					14
HC-RFS303(B)G5	1/5	3.13 (3.48)	279(317)	105	45	85h7	90	59	24H7	27 $^{+0.4}_{-0.5}$	8	10	72	203	5	6	M6	10	9	96	100		8.7(10.8)
	1/11	5.60 (5.95)																					12.7(14.8)
	1/21	8.00 (8.35)																					22.2(24.3)
	1/33	7.00 (7.35)																					14
HC-RFS353(B)G5	1/5	6.90 (7.25)	320(358)	190	100	165h8	170	122	47H7	53 $^{+0.5}_{-0.8}$	13	16	107	244	7	14(6)	M8	12	11	120	130		18.5(21.5)
	1/11	13.3 (16.5)																					19.0(22.0)
	1/21	15.3 (18.5)																					28.1(31.1)
	1/33	14.4 (17.6)																					14
HC-RFS503(B)G5	1/5	13.5 (16.7)	346(383)	135	60	115h7	120	84	32H7	35 $^{+0.4}_{-0.5}$	13	13	116	277	5	6	M8	12	11	120	130		18.5(21.5)
	1/11	13.3 (16.5)																					19.0(22.0)
	1/21	15.3 (18.5)																					28.1(31.1)
HC-RFS503(B)G5	1/33	14.4 (17.6)	366(403)	190	100	165h8	170	122	47H7	53 $^{+0.5}_{-0.8}$	13	16	133	297	7	14(6)	M8	12	11	120	130		23.5(27.5)
	1/5	16.9 (20.4)																					33.1(37.1)
1/11	20.5 (24.0)	42.3(46.0)	190	100	165h8	170	122	47H7	53 $^{+0.5}_{-0.8}$	13	16	133	354	7	14(6)	M8	12	11	120	130		33.1(37.1)	

1. ()

2. ()

3. ()

4. 가

5. LM (5)

6. A

(+)

가


1~3mm

가

ϕ 135 가

HC-RFS (B)G7

가

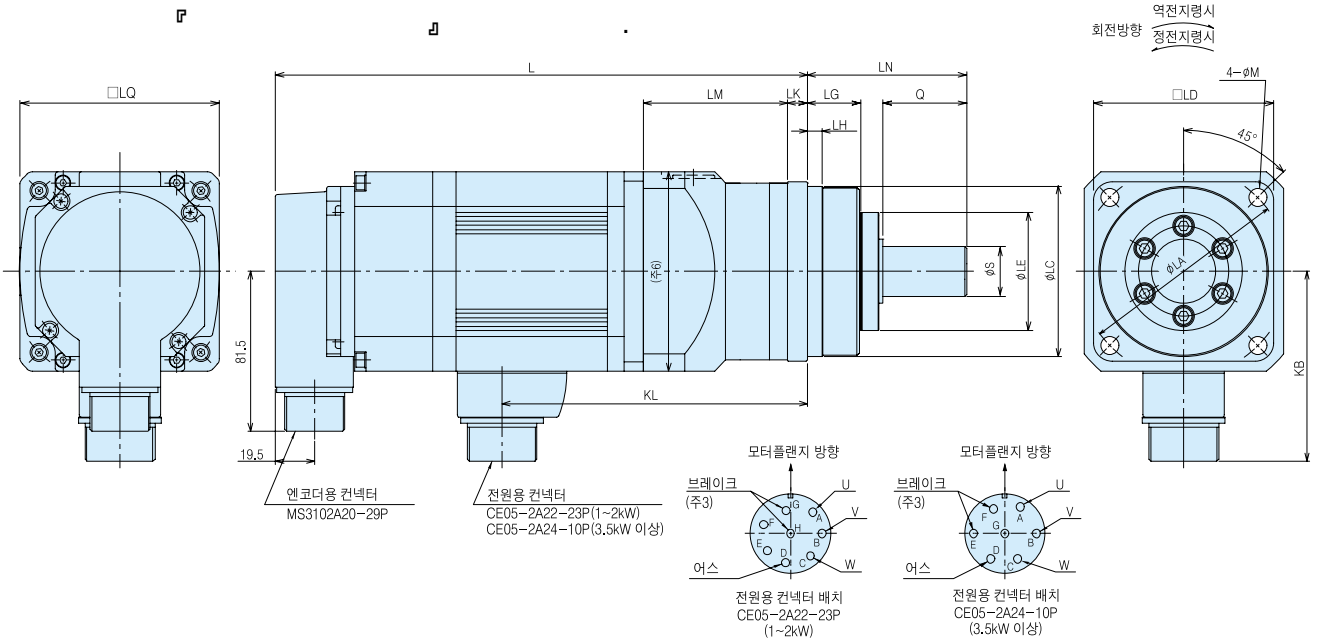


(: mm)

		J(×10 ⁻⁴ kg·m ²)	가													KB	LQ	(kg)		
			L	LA	LC	LD	LE	S	LG	LH	Q	LN	LK	LM	KL				M	
HC-RFS103(B)G7	1/5	2.37 (2.72)	229(267)	105	85h7	90	59	25h7	27	8	42	80	10	72	153	9	96	100	6.8(8.9)	
	1/11	2.25 (2.60)																		7.0(9.1)
	1/21	4.40 (4.75)	257(295)	135	115h7	120	84	40h7	35	13	82	133	13	97(6)	181	11			11.8(13.9)	
	1/33	4.20 (4.55)																		22.9(25.0)
HC-RFS153(B)G7	1/45	6.20 (6.55)	270(308)	190	165h7	170	122	50h7	53	13	156	16	107	194	14			22.9(25.0)		
	1/5	2.77 (3.12)	254(292)	105	85h7	90	59	25h7	27	8	42	80	10	72	178	9		7.9(9.9)		
	1/11	5.30 (5.65)	282(320)	135	115h7	120	84	40h7	35	13	82	133	13	97(6)	206	11		12.9(14.9)		
	1/21	4.80 (5.15)																24.0(26.0)		
HC-RFS203(B)G7	1/33	6.60 (6.95)	295(333)	190	165h8	170	122	50h7	53	13	156	16	107	219	14			24.0(26.0)		
	1/45	6.60 (6.95)																9.1(11.2)		
	1/5	3.17 (3.52)	279(317)	105	85h7	90	59	25h7	27	8	42	80	10	72	203	9		14.1(16.2)		
	1/11	5.70 (6.05)	307(345)	135	115h7	120	84	40h7	35	13	133	13	97(6)	231	11					
HC-RFS353(B)G7	1/21	8.00 (8.35)	320(358)	190	165h8	170	122	50h7	53	13	156	16	107	244	14			25.2(27.3)		
	1/33	7.00 (7.35)																		
	1/45	7.00 (7.35)																		
	1/5	13.8 (17.0)	346(383)	135	115h7	120	84	40h7	35	13	82	133	13	116	277	11		19.9(22.9)		
HC-RFS503(B)G7	1/11	13.4 (16.6)																20.4(23.4)		
	1/21	15.4 (18.6)	366(403)	190	165h8	170	122	50h7	53	13	156	16	133	297	14			31.1(34.1)		
	1/33	14.4 (17.6)																		
	1/5	17.2 (20.7)	403(440)	135	115h7	120	84	40h7	35	13	133	13	116	334	11			24.9(28.9)		
HC-RFS503(B)G7	1/11	20.7 (24.2)	423(460)	190	165h8	170	122	50h7	53	13	156	16	133	354	14			36.1(40.1)		
	1/21	18.8 (22.3)																		


1. ()
2. ()
- 3.
4. (+)
5. 가 가 1-3mm 가
6. LM (6) ø135 가

HA-LFS502

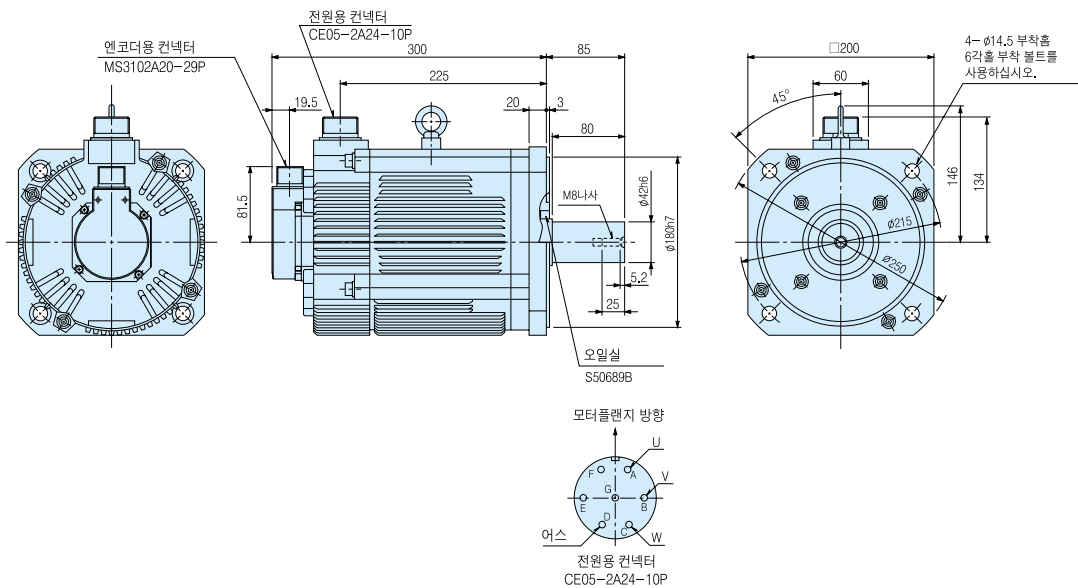

(: mm)


HA-LFS702

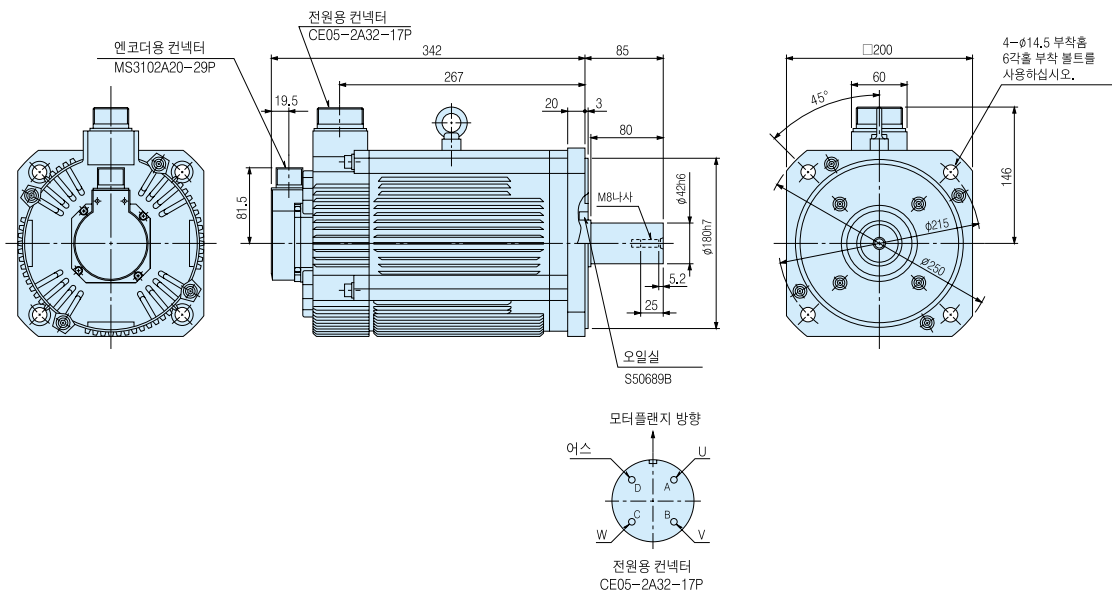


(: mm)

- 1.)
- 2. 가

HA-LFS601(B), HA-LFS6014(B) () (7)
 HA-LFS701M(B) () (7), HA-LFS701M4(B) () (7)
 HA-LFS11K2(B), HA-LFS11K24(B)

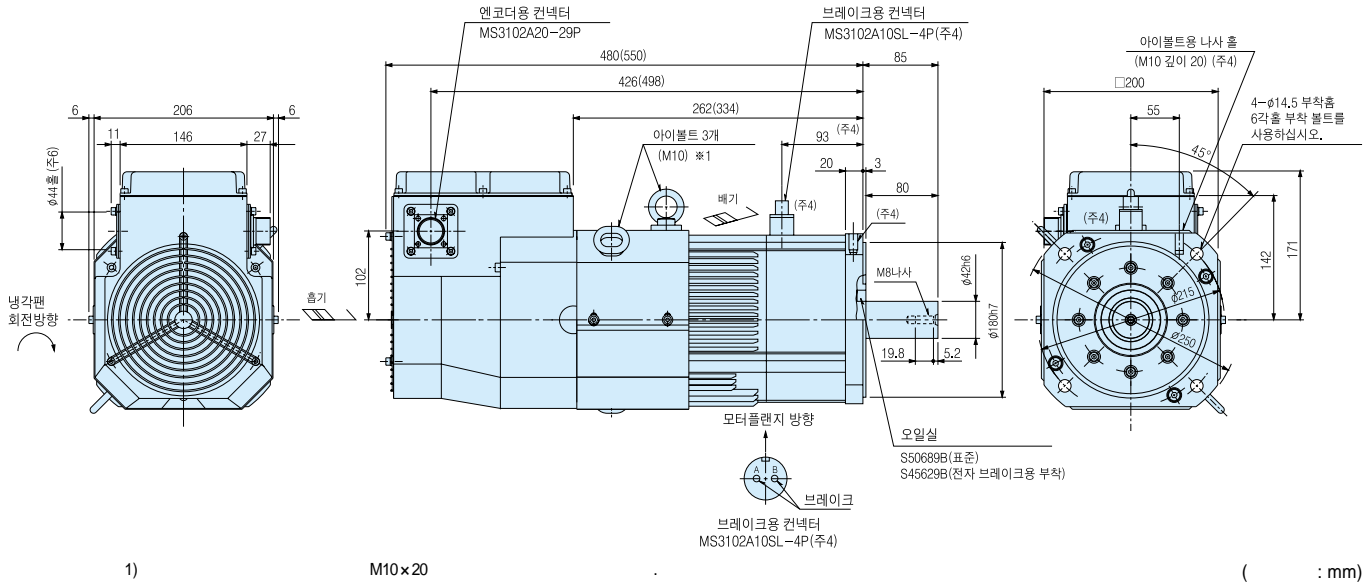


HA-LFS801(B), HA-LFS12K1(B), HA-LFS8014(B) () (7), HA-LFS12K14(B) () (7)
 HA-LFS11K1M(B), HA-LFS15K1M(B), HA-LFS11K1M4(B), HA-LFS15K1M4(B)
 HA-LFS15K2(B), HA-LFS22K2(B), HA-LFS15K24(B), HA-LFS22K24(B)

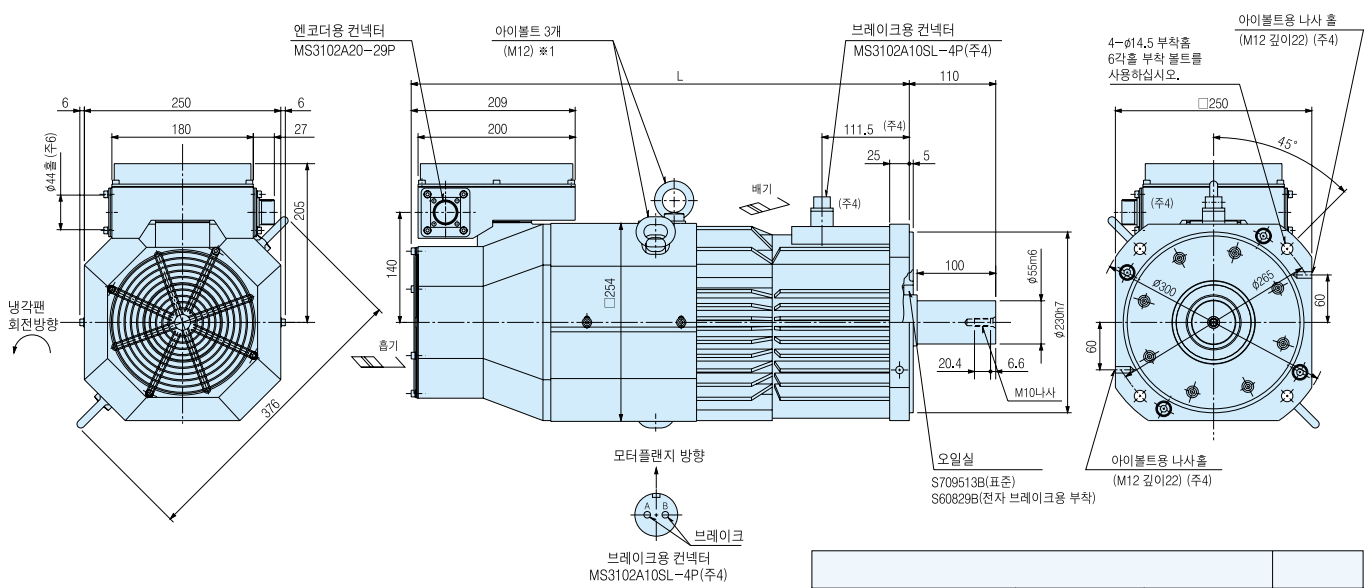

	1000r/min	1500r/min	2000r/min	L
HA-LFS801(B) HA-LFS8014(B) ()	HA-LFS11K1M(B) HA-LFS11K1M4(B)	HA-LFS15K2(B) HA-LFS15K24(B)		495(610)
HA-LFS12K1(B) HA-LFS12K14(B) ()	HA-LFS15K1M(B) HA-LFS15K1M4(B)	HA-LFS22K2(B) HA-LFS22K24(B)		555(670)

1. 가 ()
2. 가
3. ()
4. 가
5. 100mm 가
6. 가
7. 가


HA-LFS30K1M
HA-LFS30K2, HA-LFS37K2

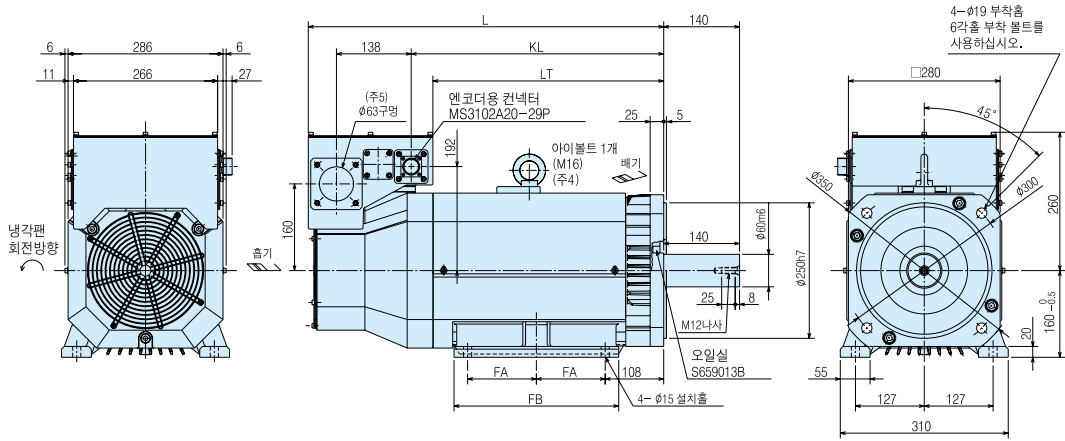

1500r/min	2000r/min	L	LT	KL	FA	FB
-	HA-LFS30K2	615	381	421	105	260
HA-LFS30K1M	HA-LFS37K2	660	426	466	127	304

(: mm)


HA-LFS37K1, HA-LFS37K14
HA-LFS50K1M4

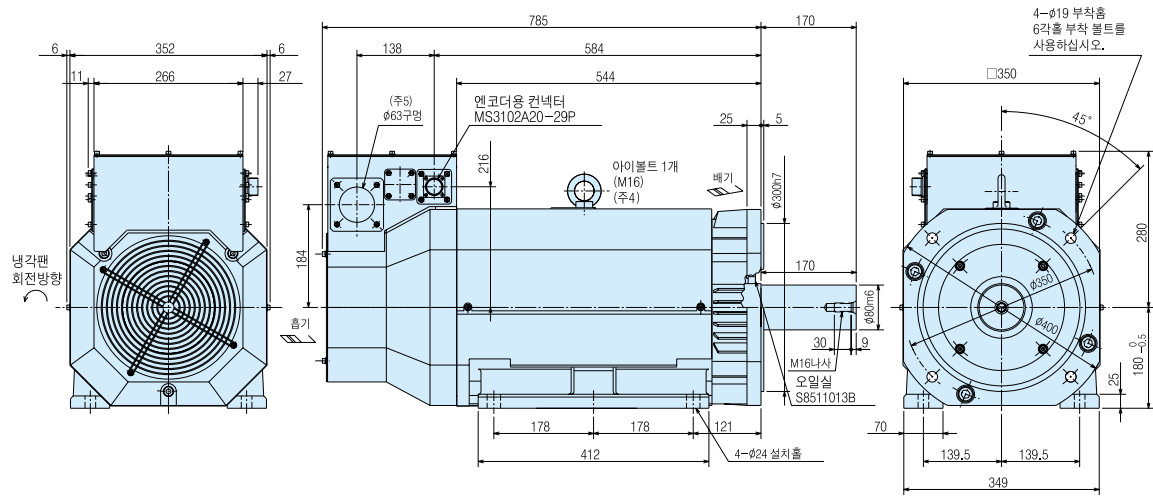

(: mm)

1.)
2. 가 ()
3. 150mm
4. M16 x 20
5. 가
6.)


HA-LFS15K1, HA-LFS20K1, HA-LFS15K14, HA-LFS20K14 () (6)
 HA-LFS22K1M, HA-LFS22K1M4, HA-LFS30K1M4
 HA-LFS30K24, HA-LFS37K24

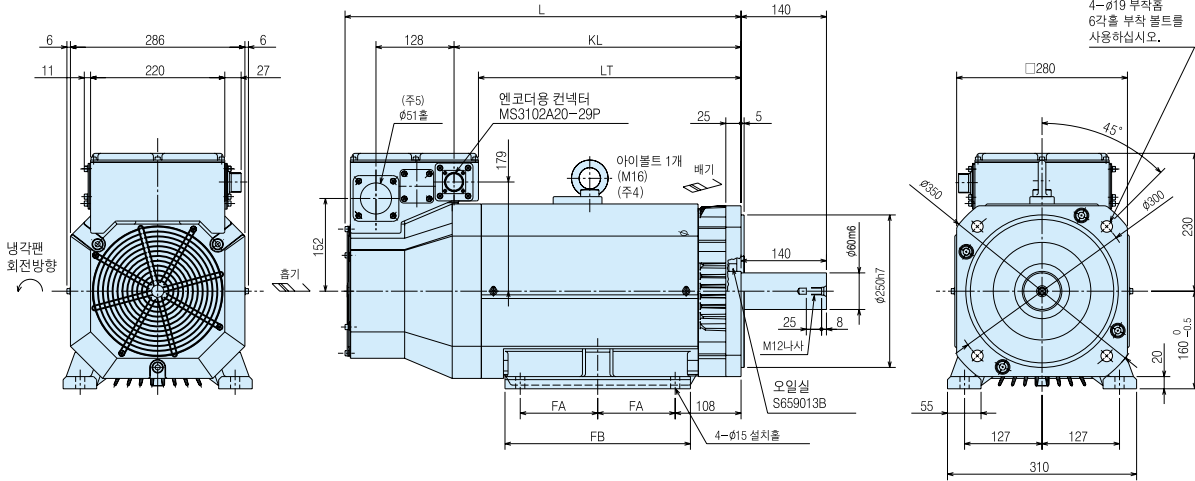

			L	LT	KL	FA	FB
1000r/min	1500r/min	2000r/min					
HA-LFS15K1 HA-LFS15K14	HA-LFS22K1M HA-LFS22K1M4	HA-LFS30K24	605	386	426	105	260
HA-LFS20K1 HA-LFS20K14()	HA-LFS30K1M4	HA-LFS37K24	650	431	471	127	304

() () : mm

HA-LFS25K1, HA-LFS30K1, HA-LFS25K14 () (6), HA-LFS30K14
 HA-LFS37K1M, HA-LFS37K1M4, HA-LFS45K1M4
 HA-LFS45K24, HA-LFS55K24

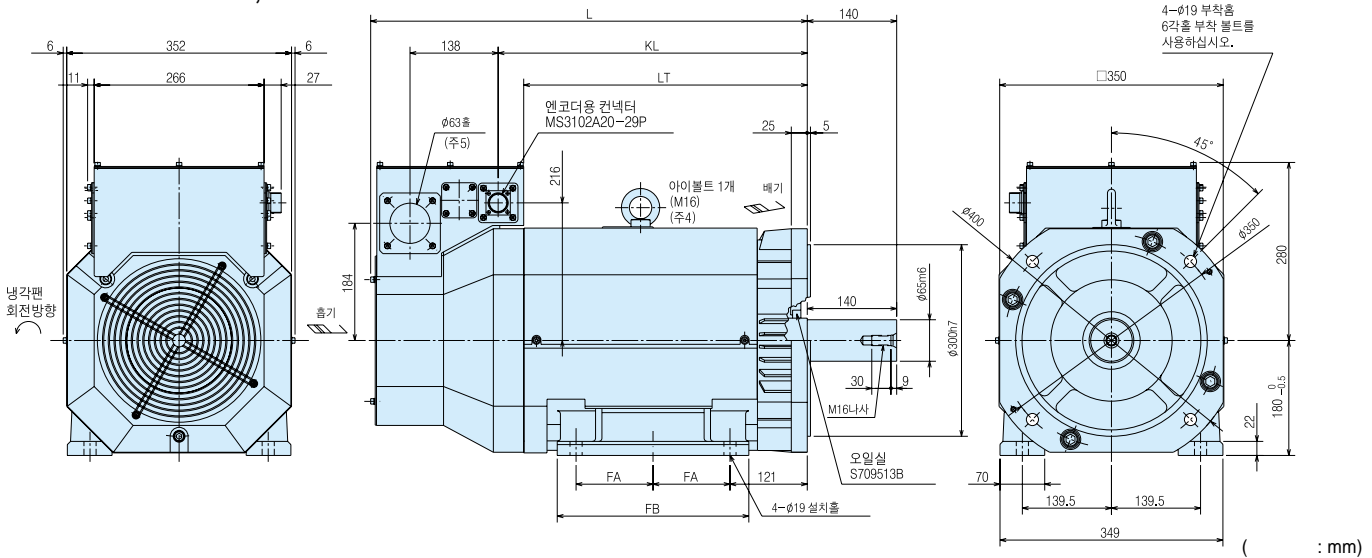


			L	LT	KL	FA	FB
1000r/min	1500r/min	2000r/min					
HA-LFS25K1 HA-LFS25K14()	HA-LFS37K1M HA-LFS37K1M4	HA-LFS45K24	640	399	439	101.5	262
HA-LFS30K1 HA-LFS30K14	HA-LFS45K1M4	HA-LFS55K24	685	444	484	120.5	300

() () : mm

1. 가 ()
2. 가
3. 150mm
4. M16 x 20
5. 가
- 6.
- 7.


HC-UFS72(B), HC-UFS152(B)

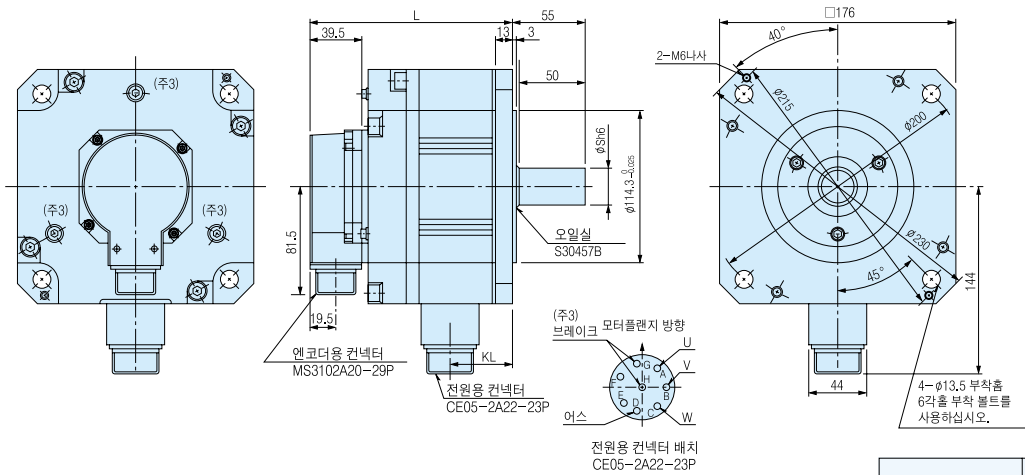

	L	KL	S
HC - UFS72(B)	110.5(144)	38	22
HC - UFS152(B)	120(153.5)	47.5	28

(: mm)

HC-UFS202(B)~HC-UFS502(B)

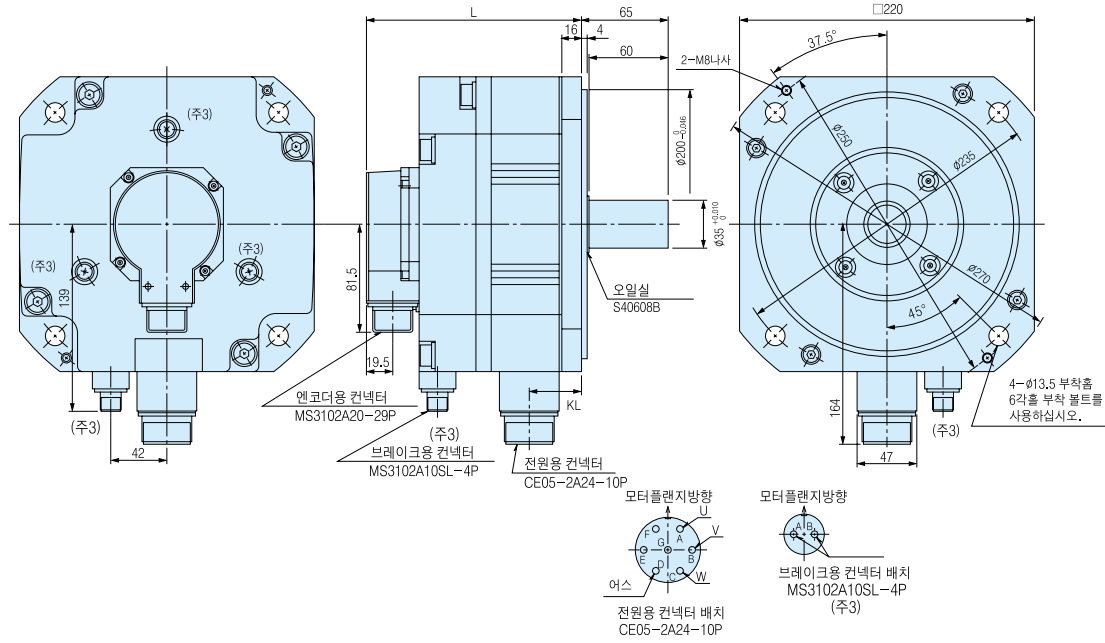

	L	KL
HC - UFS202(B)	118(161)	42.5
HC - UFS352(B)	142(185)	66.5
HC - UFS502(B)	166(209)	90.5

(: mm)

1. ()
2. ()
3. ()
4. 가

MR - J2S - A	MR - J2S - 10A	50W, 100W	AC200~230V	AC230V		
	MR - J2S - 10A1		AC100~120V			
	MR - J2S - 20A	200W	AC200~230V	AC230V		
	MR - J2S - 20A1		AC100~120V			
	MR - J2S - 40A	400W	AC200~230V	AC230V		
	MR - J2S - 40A1		AC100~120V			
	MR - J2S - 60A	600W	AC200~230V	AC230V		
	MR - J2S - 70A	750W				
	MR - J2S - 70A - U005				HC - KFS46	
	MR - J2S - 70A - U006		HC - KFS410			
	MR - J2S - 100A	1kW	AC200~230V			
	MR - J2S - 200A	2kW				
	MR - J2S - 350A	3.5kW				
	MR - J2S - 500A	5kW				
	MR - J2S - 700A	7kW				
	MR - J2S - 11KA	11kW				
	MR - J2S - 15KA	15kW				
	MR - J2S - 22KA	22kW				
	MR - J2S - 30KA	30kW				
	MR - J2S - 37KA	37kW				
	MR - J2S - 60A4	600W		AC380~480V		
	MR - J2S - 100A4	1kW				
	MR - J2S - 200A4	2kW				
	MR - J2S - 350A4	3.5kW				
	MR - J2S - 500A4	5kW				
	MR - J2S - 700A4	7kW				
	MR - J2S - 11KA4	11kW				
	MR - J2S - 15KA4	15kW				
	MR - J2S - 22KA4	22kW				
	MR - J2S - 30KA4	30kW				
	MR - J2S - 37KA4	37kW				
	MR - J2S - 45KA4	45kW				
MR - J2S - 55KA4	55kW					
MR - J2S - B	MR - J2S - 10B	50W, 100W	AC200~230V	AC230V		
	MR - J2S - 10B1		AC100~120V			
	MR - J2S - 20B	200W	AC200~230V	AC230V		
	MR - J2S - 20B1		AC100~120V			
	MR - J2S - 40B	400W	AC200~230V	AC230V		
	MR - J2S - 40B1		AC100~120V			
	MR - J2S - 60B	600W	AC200~230V	AC230V		
	MR - J2S - 70B	750W				
	MR - J2S - 70B - U005				HC - KFS46	
	MR - J2S - 70B - U006		HC - KFS410			
	MR - J2S - 100B	1kW	AC200~230V			
	MR - J2S - 200B	2kW				
	MR - J2S - 350B	3.5kW				
	MR - J2S - 500B	5kW				
	MR - J2S - 700B	7kW				
	MR - J2S - 11KB	11kW				
	MR - J2S - 15KB	15kW				
	MR - J2S - 22KB	22kW				
	MR - J2S - 30KB	30kW				
	MR - J2S - 37KB	37kW				
	MR - J2S - 60B4	600W		AC380~480V		
	MR - J2S - 100B4	1kW				
	MR - J2S - 200B4	2kW				
	MR - J2S - 350B4	3.5kW				

⋮

MR - J2S - B	MR - J2S - 500B4	5kW	AC380~480V		
	MR - J2S - 700B4	7kW			
	MR - J2S - 11KB4	11kW			
	MR - J2S - 15KB4	15kW			
	MR - J2S - 22KB4	22kW			
	MR - J2S - 30KB4	30kW			
	MR - J2S - 37KB4	37kW			
	MR - J2S - 45KB4	45kW			
	MR - J2S - 55KB4	55kW			
MR - J2S - CP	MR - J2S - 10CP	50W, 100W	AC200~230V	AC230V	
	MR - J2S - 10CP1		AC100~120V		
	MR - J2S - 20CP	200W	AC200~230V	AC230V	
	MR - J2S - 20CP1		AC100~120V		
	MR - J2S - 40CP	400W	AC200~230V	AC230V	
	MR - J2S - 40CP1		AC100~120V		
	MR - J2S - 60CP	600W	AC200~230V	AC230V	
	MR - J2S - 70CP	750W			
	MR - J2S - 70CP - U005				HC - KFS46
	MR - J2S - 70CP - U006				HC - KFS410
	MR - J2S - 100CP	1kW	AC200~230V		
	MR - J2S - 200CP	2kW			
	MR - J2S - 350CP	3.5kW			
	MR - J2S - 500CP	5kW			
MR - J2S - 700CP	7kW				
MR - J2S - CP CC - Link	MR - J2S - 10CP - S084	50W, 100W	AC200~230V	AC230V	
	MR - J2S - 10CP1 - S084		AC100~120V		
	MR - J2S - 20CP - S084	200W	AC200~230V	AC230V	
	MR - J2S - 20CP1 - S084		AC100~120V		
	MR - J2S - 40CP - S084	400W	AC200~230V	AC230V	
	MR - J2S - 40CP1 - S084		AC100~120V		
	MR - J2S - 60CP - S084	600W	AC200~230V	AC230V	
	MR - J2S - 70CP - S084	750W			
	MR - J2S - 70CP - S084U005				HC - KFS46
	MR - J2S - 70CP - S084U006				HC - KFS410
	MR - J2S - 100CP - S084	1kW	AC200~230V		
	MR - J2S - 200CP - S084	2kW			
	MR - J2S - 350CP - S084	3.5kW			
	MR - J2S - 500CP - S084	5kW			
MR - J2S - 700CP - S084	7kW				
CC - Link	MR - J2S - T01				
MR - J2S - CL	MR - J2S - 10CL	50W, 100W	AC200~230V	AC230V	
	MR - J2S - 10CL1		AC100~120V		
	MR - J2S - 20CL	200W	AC200~230V	AC230V	
	MR - J2S - 20CL1		AC100~120V		
	MR - J2S - 40CL	400W	AC200~230V	AC230V	
	MR - J2S - 40CL1		AC100~120V		
	MR - J2S - 60CL	600W	AC200~230V	AC230V	
	MR - J2S - 70CL	750W			
	MR - J2S - 70CL - U005				HC - KFS46
	MR - J2S - 70CL - U006				HC - KFS410
	MR - J2S - 100CL	1kW	AC200~230V		
	MR - J2S - 200CL	2kW			
	MR - J2S - 350CL	3.5kW			
	MR - J2S - 500CL	5kW			
MR - J2S - 700CL	7kW				
	MR - HP30KA	30kW, 37kW	AC200~230V		
	MR - HP55KA4	30kW, 37kW, 45kW, 55kW	AC380~480V		

⋮

(1)	MR - JCCBL2M - H	2m		HC - KFS HC - MFS HC - UFS3000r/min
	MR - JCCBL5M - H	5m		
	MR - JCCBL10M - H	10m		
	MR - JCCBL20M - H	20m		
	MR - JCCBL30M - H	30m		
	MR - JCCBL50M - H	50m		
	MR - JCCBL2M - L	2m		HC - SFS HC - LFS HC - RFS HA - LFS HC - UFS2000r/min
	MR - JCCBL5M - L	5m		
	MR - JCCBL10M - L	10m		
	MR - JCCBL20M - L	20m		
	MR - JCCBL30M - L	30m		
	MR - JCCBL50M - L	50m		
	MR - JHSCBL2M - H	2m		HC - SFS HC - LFS HC - RFS HA - LFS HC - UFS2000r/min
	MR - JHSCBL5M - H	5m		
	MR - JHSCBL10M - H	10m		
	MR - JHSCBL20M - H	20m		
	MR - JHSCBL30M - H	30m		
	MR - JHSCBL50M - H	50m		
	MR - JHSCBL2M - L	2m	IP65, IP67	HC - SFS HC - LFS HC - RFS HA - LFS HC - UFS2000r/min
	MR - JHSCBL5M - L	5m		
	MR - JHSCBL10M - L	10m		
	MR - JHSCBL20M - L	20m		
	MR - JHSCBL30M - L	30m		
	MR - JHSCBL50M - L	50m		
	MR - ENCBL2M - H	2m		HC - KFS, MFS, UFS3000r/min HC - SFS, HC - LFS, HC - RFS, HA - LFS, HC - UFS2000r/min
	MR - ENCBL5M - H	5m		
	MR - ENCBL10M - H	10m		
	MR - ENCBL20M - H	20m		
MR - ENCBL30M - H	30m			
MR - ENCBL50M - H	50m			
MR - J2CNM	(CN2) × 1, × 1	HC - KFS, MFS, UFS3000r/min		
MR - J2CNS		HC - SFS, HC - LFS, HC - RFS, HA - LFS, HC - UFS2000r/min		
MR - ENCNS	IP65, IP67 , EN			
MR - PWCNK1		HC - KFS, MFS, UFS3000r/min		
MR - PWCNK2				
MR - PWCNS1	IP65, IP67 , EN	HC - SFS, LFS, UFS2000r/min 1.5kW , HC - RFS 2kW (3)		
MR - PWCNS2	IP65, IP67 , EN	HC - SFS, LFS, UFS2000r/min 2~5kW(2) HC - RFS 3.5~5kW, HA - LFS502		
MR - PWCNS3		HC - SFS702(4), HA - LFS702		
MR - BKCN	IP65, IP67 , EN	HC - SFS, LFS, UFS2000r/min 2kW , HA - LFS1000r/min 12kW , HA - LFS1500r/min 15kW , HA - LFS2000r/min 11~22kW (2)		
CN1 CN5	MR - J2CN1	1 2 : × 1, (CN1A) × 1, (CN1B) × 1 (CN5) × 1, (CN5A) × 1	(CN1A) × 1	
	MR - J2HBUS05M - A	0.5m	(CN1A)	
	MR - J2HBUS1M - A	1m		
	MR - J2HBUS5M - A	5m		
	MR - J2CN1 - A	× 1,	(CN1A) × 1	
	MR - J2HBUS05M	0.5m		
	MR - J2HBUS1M	1m		
CN5 CC - Link (4) (5)	MR - J2HBUS5M	5m		

-) 1. 가 가 가 :
 2. HC - SFS121 . :
 3. HC - SFS121 . :
 4. CN5 1m :
 5. CC - Link 0.5m :

MELSERVO J2 Super

	MR - J2CN3TM		
	MR - A - TM		(CN1B) × 1 (CN5B) × 1
	MR - CPCATCBL3M	3m	DOS/V (IBM PC/AT)
	MR - JRPCATCBL3M	3m(MR - J2S - CP(1) - S084)	
	MR - TB20		
	MR - J2TBL05M	0.5m	
	MR - J2TBL1M	1m	
CN4	MR - H3CBL1M	1m	(CN4)
CN1	MR - HP4CN1		(CN1) × 1
CON2	MR - J2CMP2		(CON2) × 1
HC - KFS < 750W A : A4 B : A3	HC - KFS053	50W	()
	HC - KFS13	100W	
	HC - KFS23	200W	
	HC - KFS43	400W	
	HC - KFS73	750W	
	HC - KFS053B	50W	
	HC - KFS13B	100W	
	HC - KFS23B	200W	
	HC - KFS43B	400W	
	HC - KFS73B	750W	
	HC - KFS053(B)G1 1/5	50W (1/5)	()
	HC - KFS053(B)G1 1/12	50W (1/12)	
	HC - KFS053(B)G1 1/20	50W (1/20)	
	HC - KFS13(B)G1 1/5	100W (1/5)	
	HC - KFS13(B)G1 1/12	100W (1/12)	
	HC - KFS13(B)G1 1/20	100W (1/20)	
	HC - KFS23(B)G1 1/5	200W (1/5)	
	HC - KFS23(B)G1 1/12	200W (1/12)	
	HC - KFS23(B)G1 1/20	200W (1/20)	
	HC - KFS43(B)G1 1/5	400W (1/5)	
	HC - KFS43(B)G1 1/12	400W (1/12)	()
	HC - KFS43(B)G1 1/20	400W (1/20)	
	HC - KFS73(B)G1 1/5	750W (1/5)	
	HC - KFS73(B)G1 1/12	750W (1/12)	
	HC - KFS73(B)G1 1/20	750W (1/20)	
	HC - KFS053(B)G2 1/5	50W (1/5)	
	HC - KFS053(B)G2 1/9	50W (1/9)	
	HC - KFS053(B)G2 1/20	50W (1/20)	
	HC - KFS053(B)G2 1/29	50W (1/29)	
	HC - KFS13(B)G2 1/5	100W (1/5)	
	HC - KFS13(B)G2 1/9	100W (1/9)	
	HC - KFS13(B)G2 1/20	100W (1/20)	
	HC - KFS13(B)G2 1/29	100W (1/29)	
	HC - KFS23(B)G2 1/5	200W (1/5)	
	HC - KFS23(B)G2 1/9	200W (1/9)	
	HC - KFS23(B)G2 1/20	200W (1/20)	
	HC - KFS23(B)G2 1/29	200W (1/29)	
	HC - KFS43(B)G2 1/5	400W (1/5)	
	HC - KFS43(B)G2 1/9	400W (1/9)	
	HC - KFS43(B)G2 1/20	400W (1/20)	
HC - KFS43(B)G2 1/29	400W (1/29)		
HC - KFS73(B)G2 1/5	750W (1/5)		
HC - KFS73(B)G2 1/9	750W (1/9)		
HC - KFS73(B)G2 1/20	750W (1/20)		
HC - KFS73(B)G2 1/29	750W (1/29)		

⋮

HC - KFS < 750W A : A4 B : A3	HC - KFS053(B)G5 1/5	50W (1/5)	()	
	HC - KFS053(B)G5 1/11	50W (1/11)		
	HC - KFS053(B)G5 1/21	50W (1/21)		
	HC - KFS053(B)G5 1/33	50W (1/33)		
	HC - KFS053(B)G5 1/45	50W (1/45)		
	HC - KFS13(B)G5 1/5	100W (1/5)		
	HC - KFS13(B)G5 1/11	100W (1/11)		
	HC - KFS13(B)G5 1/21	100W (1/21)		
	HC - KFS13(B)G5 1/33	100W (1/33)		
	HC - KFS13(B)G5 1/45	100W (1/45)		
	HC - KFS23(B)G5 1/5	200W (1/5)		
	HC - KFS23(B)G5 1/11	200W (1/11)		
	HC - KFS23(B)G5 1/21	200W (1/21)		
	HC - KFS23(B)G5 1/33	200W (1/33)		
	HC - KFS23(B)G5 1/45	200W (1/45)		
	HC - KFS43(B)G5 1/5	400W (1/5)		
	HC - KFS43(B)G5 1/11	400W (1/11)		
	HC - KFS43(B)G5 1/21	400W (1/21)		
	HC - KFS43(B)G5 1/33	400W (1/33)		
	HC - KFS43(B)G5 1/45	400W (1/45)		
	HC - KFS73(B)G5 1/5	750W (1/5)		
	HC - KFS73(B)G5 1/11	750W (1/11)		
	HC - KFS73(B)G5 1/21	750W (1/21)		
	HC - KFS73(B)G5 1/33	750W (1/33)		
	HC - KFS73(B)G5 1/45	750W (1/45)		
	HC - KFS053(B)G7 1/5	50W (1/5)		
	HC - KFS053(B)G7 1/11	50W (1/11)		
	HC - KFS053(B)G7 1/21	50W (1/21)		
	HC - KFS053(B)G7 1/33	50W (1/33)		
	HC - KFS053(B)G7 1/45	50W (1/45)		
	HC - KFS13(B)G7 1/5	100W (1/5)		
	HC - KFS13(B)G7 1/11	100W (1/11)		
	HC - KFS13(B)G7 1/21	100W (1/21)		
	HC - KFS13(B)G7 1/33	100W (1/33)		
	HC - KFS13(B)G7 1/45	100W (1/45)		
	HC - KFS23(B)G7 1/5	200W (1/5)		
	HC - KFS23(B)G7 1/11	200W (1/11)		
	HC - KFS23(B)G7 1/21	200W (1/21)		
	HC - KFS23(B)G7 1/33	200W (1/33)		
	HC - KFS23(B)G7 1/45	200W (1/45)		
	HC - KFS43(B)G7 1/5	400W (1/5)		
	HC - KFS43(B)G7 1/11	400W (1/11)		
	HC - KFS43(B)G7 1/21	400W (1/21)		
	HC - KFS43(B)G7 1/33	400W (1/33)		
HC - KFS43(B)G7 1/45	400W (1/45)			
HC - KFS73(B)G7 1/5	750W (1/5)			
HC - KFS73(B)G7 1/11	750W (1/11)			
HC - KFS73(B)G7 1/21	750W (1/21)			
HC - KFS73(B)G7 1/33	750W (1/33)			
HC - KFS73(B)G7 1/45	750W (1/45)			
HC - KFS	HC - KFS46	400W	MR - J2S - 70 - U005	
	HC - KFS410		MR - J2S - 70 - U006	
HC - MFS	HC - MFS053	50W		
	HC - MFS13	100W		
	HC - MFS23	200W		
	HC - MFS43	400W		

⋮
⋮

HC - MFS	HC - MFS73	750W	()
	HC - MFS053B	50W	
	HC - MFS13B	100W	
	HC - MFS23B	200W	
	HC - MFS43B	400W	
	HC - MFS73B	750W	
	HC - MFS053(B)G1 1/5	50W (1/5)	
	HC - MFS053(B)G1 1/12	50W (1/12)	
	HC - MFS053(B)G1 1/20	50W (1/20)	
	HC - MFS13(B)G1 1/5	100W (1/5)	
	HC - MFS13(B)G1 1/12	100W (1/12)	
	HC - MFS13(B)G1 1/20	100W (1/20)	
	HC - MFS23(B)G1 1/5	200W (1/5)	
	HC - MFS23(B)G1 1/12	200W (1/12)	
	HC - MFS23(B)G1 1/20	200W (1/20)	
	HC - MFS43(B)G1 1/5	400W (1/5)	
	HC - MFS43(B)G1 1/12	400W (1/12)	
	HC - MFS43(B)G1 1/20	400W (1/20)	
	HC - MFS73(B)G1 1/5	750W (1/5)	
	HC - MFS73(B)G1 1/12	750W (1/12)	
	HC - MFS73(B)G1 1/20	750W (1/20)	
	HC - MFS053(B)G2 1/5	50W (1/5)	
	HC - MFS053(B)G2 1/9	50W (1/9)	
	HC - MFS053(B)G2 1/20	50W (1/20)	
	HC - MFS053(B)G2 1/29	50W (1/29)	
	HC - MFS13(B)G2 1/5	100W (1/5)	
	HC - MFS13(B)G2 1/9	100W (1/9)	
	HC - MFS13(B)G2 1/20	100W (1/20)	
	HC - MFS13(B)G2 1/29	100W (1/29)	
	HC - MFS23(B)G2 1/5	200W (1/5)	
	HC - MFS23(B)G2 1/9	200W (1/9)	
	HC - MFS23(B)G2 1/20	200W (1/20)	
	HC - MFS23(B)G2 1/29	200W (1/29)	
	HC - MFS43(B)G2 1/5	400W (1/5)	
	HC - MFS43(B)G2 1/9	400W (1/9)	
	HC - MFS43(B)G2 1/20	400W (1/20)	
	HC - MFS43(B)G2 1/29	400W (1/29)	
	HC - MFS73(B)G2 1/5	750W (1/5)	
	HC - MFS73(B)G2 1/9	750W (1/9)	
	HC - MFS73(B)G2 1/20	750W (1/20)	
	HC - MFS73(B)G2 1/29	750W (1/29)	
	HC - MFS053(B)G5 1/5	50W (1/5)	
	HC - MFS053(B)G5 1/11	50W (1/11)	
	HC - MFS053(B)G5 1/21	50W (1/21)	
	HC - MFS053(B)G5 1/33	50W (1/33)	
	HC - MFS053(B)G5 1/45	50W (1/45)	
	HC - MFS13(B)G5 1/5	100W (1/5)	
	HC - MFS13(B)G5 1/11	100W (1/11)	
	HC - MFS13(B)G5 1/21	100W (1/21)	
	HC - MFS13(B)G5 1/33	100W (1/33)	
HC - MFS13(B)G5 1/45	100W (1/45)		
HC - MFS23(B)G5 1/5	200W (1/5)		
HC - MFS23(B)G5 1/11	200W (1/11)		

⋮

HC - MFS	HC - MFS23(B)G5 1/21	200W (1/21)	()	
	HC - MFS23(B)G5 1/33	200W (1/33)		
	HC - MFS23(B)G5 1/45	200W (1/45)		
	HC - MFS43(B)G5 1/5	400W (1/5)		
	HC - MFS43(B)G5 1/11	400W (1/11)		
	HC - MFS43(B)G5 1/21	400W (1/21)		
	HC - MFS43(B)G5 1/33	400W (1/33)		
	HC - MFS43(B)G5 1/45	400W (1/45)		
	HC - MFS73(B)G5 1/5	750W (1/5)		
	HC - MFS73(B)G5 1/11	750W (1/11)		
	HC - MFS73(B)G5 1/21	750W (1/21)		
	HC - MFS73(B)G5 1/33	750W (1/33)		
	HC - MFS73(B)G5 1/45	750W (1/45)		
	HC - MFS053(B)G7 1/5	50W (1/5)	()	
	HC - MFS053(B)G7 1/11	50W (1/11)		
	HC - MFS053(B)G7 1/21	50W (1/21)		
	HC - MFS053(B)G7 1/33	50W (1/33)		
	HC - MFS053(B)G7 1/45	50W (1/45)		
	HC - MFS13(B)G7 1/5	100W (1/5)		
	HC - MFS13(B)G7 1/11	100W (1/11)		
	HC - MFS13(B)G7 1/21	100W (1/21)		
	HC - MFS13(B)G7 1/33	100W (1/33)		
	HC - MFS13(B)G7 1/45	100W (1/45)		
	HC - MFS23(B)G7 1/5	200W (1/5)		
	HC - MFS23(B)G7 1/11	200W (1/11)		
	HC - MFS23(B)G7 1/21	200W (1/21)		
	HC - MFS23(B)G7 1/33	200W (1/33)		
	HC - MFS23(B)G7 1/45	200W (1/45)		
	HC - MFS43(B)G7 1/5	400W (1/5)		
	HC - MFS43(B)G7 1/11	400W (1/11)		
	HC - MFS43(B)G7 1/21	400W (1/21)		
	HC - MFS43(B)G7 1/33	400W (1/33)		
	HC - MFS43(B)G7 1/45	400W (1/45)		
	HC - MFS73(B)G7 1/5	750W (1/5)		
	HC - MFS73(B)G7 1/11	750W (1/11)		
	HC - MFS73(B)G7 1/21	750W (1/21)		
HC - MFS73(B)G7 1/33	750W (1/33)			
HC - MFS73(B)G7 1/45	750W (1/45)			
HC - SFS1000r/min < A : A1 >	HC - SFS81	850W		
	HC - SFS121	1.2kW		
	HC - SFS201	2kW		
	HC - SFS301	3kW		
	HC - SFS81B	850W		
	HC - SFS121B	1.2kW		
	HC - SFS201B	2kW		
	HC - SFS301B	3kW		
HC - SFS2000r/min < 5.0kW, 7.0kW(200V) > A : B0 B : B0	HC - SFS52	500W	200V	
	HC - SFS102	1kW		
	HC - SFS152	1.5kW		
	HC - SFS202	2kW		
	HC - SFS352	3.5kW		
	HC - SFS502	5kW	400V	
	HC - SFS702	7kW		
	HC - SFS524	500W		
	HC - SFS1024	1kW		

⋮
⋮

MELSERVO J2 Super

HC - SFS2000r/min < 5.0kW, 7.0kW(200V) A : B0 B : B0	HC - SFS1524	1.5kW	400V	() G1 ... G1H ...
	HC - SFS2024	2kW		
	HC - SFS3524	3.5kW		
	HC - SFS5024	5kW		
	HC - SFS7024	7kW		
	HC - SFS52B	500W	200V	
	HC - SFS102B	1kW		
	HC - SFS152B	1.5kW		
	HC - SFS202B	2kW		
	HC - SFS352B	3.5kW		
	HC - SFS502B	5kW	400V	
	HC - SFS702B	7kW		
	HC - SFS524B	500W		
	HC - SFS1024B	1kW		
	HC - SFS1524B	1.5kW		
	HC - SFS2024B	2kW	200V	
	HC - SFS3524B	3.5kW		
	HC - SFS5024B	5kW		
	HC - SFS7024B	7kW		
	HC - SFS52(B)G1(H)1/6	500W (1/6)		
	HC - SFS52(B)G1(H)1/11	500W (1/11)		
	HC - SFS52(B)G1(H)1/17	500W (1/17)		
	HC - SFS52(B)G1(H)1/29	500W (1/29)		
	HC - SFS52(B)G1(H)1/35	500W (1/35)		
	HC - SFS52(B)G1(H)1/43	500W (1/43)		
	HC - SFS52(B)G1(H)1/59	500W (1/59)		
	HC - SFS102(B)G1(H)1/6	1kW (1/6)		
	HC - SFS102(B)G1(H)1/11	1kW (1/11)		
	HC - SFS102(B)G1(H)1/17	1kW (1/17)		
	HC - SFS102(B)G1(H)1/29	1kW (1/29)		
	HC - SFS102(B)G1(H)1/35	1kW (1/35)		
	HC - SFS102(B)G1(H)1/43	1kW (1/43)		
	HC - SFS102(B)G1(H)1/59	1kW (1/59)		
	HC - SFS152(B)G1(H)1/6	1.5kW (1/6)		
	HC - SFS152(B)G1(H)1/11	1.5kW (1/11)		
	HC - SFS152(B)G1(H)1/17	1.5kW (1/17)		
	HC - SFS152(B)G1(H)1/29	1.5kW (1/29)		
	HC - SFS152(B)G1(H)1/35	1.5kW (1/35)		
	HC - SFS152(B)G1(H)1/43	1.5kW (1/43)		
	HC - SFS152(B)G1(H)1/59	1.5kW (1/59)		
	HC - SFS202(B)G1(H)1/6	2kW (1/6)		
	HC - SFS202(B)G1(H)1/11	2kW (1/11)		
HC - SFS202(B)G1(H)1/17	2kW (1/17)			
HC - SFS202(B)G1(H)1/29	2kW (1/29)			
HC - SFS202(B)G1(H)1/35	2kW (1/35)			
HC - SFS202(B)G1(H)1/43	2kW (1/43)			
HC - SFS202(B)G1(H)1/59	2kW (1/59)			
HC - SFS352(B)G1(H)1/6	3.5kW (1/6)			
HC - SFS352(B)G1(H)1/11	3.5kW (1/11)			
HC - SFS352(B)G1(H)1/17	3.5kW (1/17)			
HC - SFS352(B)G1(H)1/29	3.5kW (1/29)			
HC - SFS352(B)G1(H)1/35	3.5kW (1/35)			

) G1(), G1H() 가 . :
:

HC - SFS2000r/min < 5.0kW, 7.0kW(200V) > A : B0 B : B0	HC - SFS352(B)G1(H)1/43	3.5kW (1/43)	200V	() G1 ... G1H ...	
	HC - SFS352(B)G1(H)1/59	3.5kW (1/59)			
	HC - SFS502(B)G1(H)1/11	5kW (1/11)			
	HC - SFS502(B)G1(H)1/17	5kW (1/17)			
	HC - SFS502(B)G1(H)1/29	5kW (1/29)			
	HC - SFS502(B)G1(H)1/35	5kW (1/35)			
	HC - SFS502(B)G1(H)1/43	5kW (1/43)			
	HC - SFS702(B)G1(H)1/11	7kW (1/11)			
	HC - SFS702(B)G1(H)1/17	7kW (1/17)			
	HC - SFS702(B)G1(H)1/29	7kW (1/29)			
	HC - SFS702(B)G1(H)1/35	7kW (1/35)			
	HC - SFS702(B)G1(H)1/43	7kW (1/43)			
	HC - SFS524(B)G1(H)1/6	500W (1/6)			400V
	HC - SFS524(B)G1(H)1/11	500W (1/11)			
	HC - SFS524(B)G1(H)1/17	500W (1/17)			
	HC - SFS524(B)G1(H)1/29	500W (1/29)			
	HC - SFS524(B)G1(H)1/35	500W (1/35)			
	HC - SFS524(B)G1(H)1/43	500W (1/43)			
	HC - SFS524(B)G1(H)1/59	500W (1/59)			
	HC - SFS1024(B)G1(H)1/6	1kW (1/6)			
	HC - SFS1024(B)G1(H)1/11	1kW (1/11)			
	HC - SFS1024(B)G1(H)1/17	1kW (1/17)			
	HC - SFS1024(B)G1(H)1/29	1kW (1/29)			
	HC - SFS1024(B)G1(H)1/35	1kW (1/35)			
	HC - SFS1024(B)G1(H)1/43	1kW (1/43)			
	HC - SFS1024(B)G1(H)1/59	1kW (1/59)			
	HC - SFS1524(B)G1(H)1/6	1.5kW (1/6)			
	HC - SFS1524(B)G1(H)1/11	1.5kW (1/11)			
	HC - SFS1524(B)G1(H)1/17	1.5kW (1/17)			
	HC - SFS1524(B)G1(H)1/29	1.5kW (1/29)			
	HC - SFS1524(B)G1(H)1/35	1.5kW (1/35)			
	HC - SFS1524(B)G1(H)1/43	1.5kW (1/43)			
	HC - SFS1524(B)G1(H)1/59	1.5kW (1/59)			
	HC - SFS2024(B)G1(H)1/6	2kW (1/6)			
	HC - SFS2024(B)G1(H)1/11	2kW (1/11)			
	HC - SFS2024(B)G1(H)1/17	2kW (1/17)			
	HC - SFS2024(B)G1(H)1/29	2kW (1/29)			
	HC - SFS2024(B)G1(H)1/35	2kW (1/35)			
	HC - SFS2024(B)G1(H)1/43	2kW (1/43)			
	HC - SFS2024(B)G1(H)1/59	2kW (1/59)			
	HC - SFS3524(B)G1(H)1/6	3.5kW (1/6)			
	HC - SFS3524(B)G1(H)1/11	3.5kW (1/11)			
	HC - SFS3524(B)G1(H)1/17	3.5kW (1/17)			
	HC - SFS3524(B)G1(H)1/29	3.5kW (1/29)			
	HC - SFS3524(B)G1(H)1/35	3.5kW (1/35)			
	HC - SFS3524(B)G1(H)1/43	3.5kW (1/43)			
	HC - SFS3524(B)G1(H)1/59	3.5kW (1/59)			
	HC - SFS5024(B)G1(H)1/11	5kW (1/11)			
	HC - SFS5024(B)G1(H)1/17	5kW (1/17)			
	HC - SFS5024(B)G1(H)1/29	5kW (1/29)			
HC - SFS5024(B)G1(H)1/35	5kW (1/35)				
HC - SFS5024(B)G1(H)1/43	5kW (1/43)				
HC - SFS7024(B)G1(H)1/11	7kW (1/11)				
HC - SFS7024(B)G1(H)1/17	7kW (1/17)				

) G1(), G1H() 가 . :

:

MELSERVO J2 Super

HC - SFS2000r/min < 5.0kW, 7.0kW(200V) A : B0 B : B0	HC - SFS7024(B)G1(H)1/29	7kW (1/29)	400V	() G1 ... G1H ...	
	HC - SFS7024(B)G1(H)1/35	7kW (1/35)			
	HC - SFS7024(B)G1(H)1/43	7kW (1/43)			
	HC - SFS52(B)G2 1/5	500W (1/5)	200V		
	HC - SFS52(B)G2 1/9	500W (1/9)			
	HC - SFS52(B)G2 1/20	500W (1/20)			
	HC - SFS52(B)G2 1/29	500W (1/29)			
	HC - SFS52(B)G2 1/45	500W (1/45)			
	HC - SFS102(B)G2 1/5	1kW (1/5)			
	HC - SFS102(B)G2 1/9	1kW (1/9)			
	HC - SFS102(B)G2 1/20	1kW (1/20)			
	HC - SFS102(B)G2 1/29	1kW (1/29)			
	HC - SFS102(B)G2 1/45	1kW (1/45)			
	HC - SFS152(B)G2 1/5	1.5kW (1/5)			
	HC - SFS152(B)G2 1/9	1.5kW (1/9)			
	HC - SFS152(B)G2 1/20	1.5kW (1/20)			
	HC - SFS152(B)G2 1/29	1.5kW (1/29)			
	HC - SFS152(B)G2 1/45	1.5kW (1/45)			
	HC - SFS202(B)G2 1/5	2kW (1/5)			
	HC - SFS202(B)G2 1/9	2kW (1/9)			
	HC - SFS202(B)G2 1/20	2kW (1/20)			
	HC - SFS202(B)G2 1/29	2kW (1/29)			
	HC - SFS202(B)G2 1/45	2kW (1/45)			
	HC - SFS352(B)G2 1/5	3.5kW (1/5)			
	HC - SFS352(B)G2 1/9	3.5kW (1/9)			
	HC - SFS352(B)G2 1/20	3.5kW (1/20)			
	HC - SFS502(B)G2 1/5	5kW (1/5)			
	HC - SFS502(B)G2 1/9	5kW (1/9)			
	HC - SFS702(B)G2 1/5	7kW (1/5)			
	HC - SFS524(B)G2 1/5	500W (1/5)	400V	()	
	HC - SFS524(B)G2 1/9	500W (1/9)			
	HC - SFS524(B)G2 1/20	500W (1/20)			
	HC - SFS524(B)G2 1/29	500W (1/29)			
	HC - SFS524(B)G2 1/45	500W (1/45)			
	HC - SFS1024(B)G2 1/5	1kW (1/5)			
	HC - SFS1024(B)G2 1/9	1kW (1/9)			
	HC - SFS1024(B)G2 1/20	1kW (1/20)			
	HC - SFS1024(B)G2 1/29	1kW (1/29)			
	HC - SFS1024(B)G2 1/45	1kW (1/45)			
	HC - SFS1524(B)G2 1/5	1.5kW (1/5)			
	HC - SFS1524(B)G2 1/9	1.5kW (1/9)			
	HC - SFS1524(B)G2 1/20	1.5kW (1/20)			
HC - SFS1524(B)G2 1/29	1.5kW (1/29)				
HC - SFS1524(B)G2 1/45	1.5kW (1/45)				
HC - SFS2024(B)G2 1/5	2kW (1/5)				
HC - SFS2024(B)G2 1/9	2kW (1/9)				
HC - SFS2024(B)G2 1/20	2kW (1/20)				
HC - SFS2024(B)G2 1/29	2kW (1/29)				
HC - SFS2024(B)G2 1/45	2kW (1/45)				
HC - SFS3524(B)G2 1/5	3.5kW (1/5)				
HC - SFS3524(B)G2 1/9	3.5kW (1/9)				
HC - SFS3524(B)G2 1/20	3.5kW (1/20)				
HC - SFS5024(B)G2 1/5	5kW (1/5)				
HC - SFS5024(B)G2 1/9	5kW (1/9)				
HC - SFS7024(B)G2 1/5	7kW (1/5)				

) G1(), G1H() 가

:
:

HC - SFS2000r/min < 5.0kW, 7.0kW(200V) > A : B0 B : B0	HC - SFS52(B)G5 1/5	500W (1/5)	200V	()
	HC - SFS52(B)G5 1/11	500W (1/11)		
	HC - SFS52(B)G5 1/21	500W (1/21)		
	HC - SFS52(B)G5 1/33	500W (1/33)		
	HC - SFS52(B)G5 1/45	500W (1/45)		
	HC - SFS102(B)G5 1/5	1kW (1/5)		
	HC - SFS102(B)G5 1/11	1kW (1/11)		
	HC - SFS102(B)G5 1/21	1kW (1/21)		
	HC - SFS102(B)G5 1/33	1kW (1/33)		
	HC - SFS102(B)G5 1/45	1kW (1/45)		
	HC - SFS152(B)G5 1/5	1.5kW (1/5)		
	HC - SFS152(B)G5 1/11	1.5kW (1/11)		
	HC - SFS152(B)G5 1/21	1.5kW (1/21)		
	HC - SFS152(B)G5 1/33	1.5kW (1/33)		
	HC - SFS152(B)G5 1/45	1.5kW (1/45)		
	HC - SFS202(B)G5 1/5	2kW (1/5)		
	HC - SFS202(B)G5 1/11	2kW (1/11)		
	HC - SFS202(B)G5 1/21	2kW (1/21)		
	HC - SFS202(B)G5 1/33	2kW (1/33)		
	HC - SFS202(B)G5 1/45	2kW (1/45)		
	HC - SFS352(B)G5 1/5	3.5kW (1/5)		
	HC - SFS352(B)G5 1/11	3.5kW (1/11)		
	HC - SFS352(B)G5 1/21	3.5kW (1/21)		
	HC - SFS502(B)G5 1/5	5kW (1/5)		
	HC - SFS502(B)G5 1/11	5kW (1/11)		
	HC - SFS702(B)G5 1/5	7kW (1/5)		
	HC - SFS524(B)G5 1/5	500W (1/5)	400V	
	HC - SFS524(B)G5 1/11	500W (1/11)		
	HC - SFS524(B)G5 1/21	500W (1/21)		
	HC - SFS524(B)G5 1/33	500W (1/33)		
	HC - SFS524(B)G5 1/45	500W (1/45)		
	HC - SFS1024(B)G5 1/5	1kW (1/5)		
	HC - SFS1024(B)G5 1/11	1kW (1/11)		
	HC - SFS1024(B)G5 1/21	1kW (1/21)		
	HC - SFS1024(B)G5 1/33	1kW (1/33)		
	HC - SFS1024(B)G5 1/45	1kW (1/45)		
	HC - SFS1524(B)G5 1/5	1.5kW (1/5)		
	HC - SFS1524(B)G5 1/11	1.5kW (1/11)		
	HC - SFS1524(B)G5 1/21	1.5kW (1/21)		
	HC - SFS1524(B)G5 1/33	1.5kW (1/33)		
	HC - SFS1524(B)G5 1/45	1.5kW (1/45)		
	HC - SFS2024(B)G5 1/5	2kW (1/5)		
	HC - SFS2024(B)G5 1/11	2kW (1/11)		
	HC - SFS2024(B)G5 1/21	2kW (1/21)		
	HC - SFS2024(B)G5 1/33	2kW (1/33)		
HC - SFS2024(B)G5 1/45	2kW (1/45)			
HC - SFS3524(B)G5 1/5	3.5kW (1/5)			
HC - SFS3524(B)G5 1/11	3.5kW (1/11)			
HC - SFS3524(B)G5 1/21	3.5kW (1/21)			
HC - SFS5024(B)G5 1/5	5kW (1/5)			
HC - SFS5024(B)G5 1/11	5kW (1/11)			
HC - SFS7024(B)G5 1/5	7kW (1/5)			
HC - SFS52(B)G7 1/5	500W (1/5)	200V		
HC - SFS52(B)G7 1/11	500W (1/11)			
HC - SFS52(B)G7 1/21	500W (1/21)			
HC - SFS52(B)G7 1/33	500W (1/33)			
HC - SFS52(B)G7 1/45	500W (1/45)			

⋮
⋮

HC - SFS2000r/min < > 5.0kW, 7.0kW(200V) A : B0 B : B0	HC - SFS102(B)G7 1/5	1kW (1/5)	200V	()
	HC - SFS102(B)G7 1/11	1kW (1/11)		
	HC - SFS102(B)G7 1/21	1kW (1/21)		
	HC - SFS102(B)G7 1/33	1kW (1/33)		
	HC - SFS102(B)G7 1/45	1kW (1/45)		
	HC - SFS152(B)G7 1/5	1.5kW (1/5)		
	HC - SFS152(B)G7 1/11	1.5kW (1/11)		
	HC - SFS152(B)G7 1/21	1.5kW (1/21)		
	HC - SFS152(B)G7 1/33	1.5kW (1/33)		
	HC - SFS152(B)G7 1/45	1.5kW (1/45)		
	HC - SFS202(B)G7 1/5	2kW (1/5)		
	HC - SFS202(B)G7 1/11	2kW (1/11)		
	HC - SFS202(B)G7 1/21	2kW (1/21)		
	HC - SFS202(B)G7 1/33	2kW (1/33)		
	HC - SFS202(B)G7 1/45	2kW (1/45)		
	HC - SFS352(B)G7 1/5	3.5kW (1/5)		
	HC - SFS352(B)G7 1/11	3.5kW (1/11)		
	HC - SFS352(B)G7 1/21	3.5kW (1/21)		
	HC - SFS502(B)G7 1/5	5kW (1/5)		
	HC - SFS502(B)G7 1/11	5kW (1/11)		
	HC - SFS702(B)G7 1/5	7kW (1/5)		
	HC - SFS524(B)G7 1/5	500W (1/5)	400V	
	HC - SFS524(B)G7 1/11	500W (1/11)		
	HC - SFS524(B)G7 1/21	500W (1/21)		
	HC - SFS524(B)G7 1/33	500W (1/33)		
	HC - SFS524(B)G7 1/45	500W (1/45)		
	HC - SFS1024(B)G7 1/5	1kW (1/5)		
	HC - SFS1024(B)G7 1/11	1kW (1/11)		
	HC - SFS1024(B)G7 1/21	1kW (1/21)		
	HC - SFS1024(B)G7 1/33	1kW (1/33)		
	HC - SFS1024(B)G7 1/45	1kW (1/45)		
	HC - SFS1524(B)G7 1/5	1.5kW (1/5)		
	HC - SFS1524(B)G7 1/11	1.5kW (1/11)		
HC - SFS1524(B)G7 1/21	1.5kW (1/21)			
HC - SFS1524(B)G7 1/33	1.5kW (1/33)			
HC - SFS1524(B)G7 1/45	1.5kW (1/45)			
HC - SFS2024(B)G7 1/5	2kW (1/5)			
HC - SFS2024(B)G7 1/11	2kW (1/11)			
HC - SFS2024(B)G7 1/21	2kW (1/21)			
HC - SFS2024(B)G7 1/33	2kW (1/33)			
HC - SFS2024(B)G7 1/45	2kW (1/45)			
HC - SFS3524(B)G7 1/5	3.5kW (1/5)			
HC - SFS3524(B)G7 1/11	3.5kW (1/11)			
HC - SFS3524(B)G7 1/21	3.5kW (1/21)			
HC - SFS5024(B)G7 1/5	5kW (1/5)			
HC - SFS5024(B)G7 1/11	5kW (1/11)			
HC - SFS7024(B)G7 1/5	7kW (1/5)			
HC - SFS3000r/min < > A : A1	HC - SFS53	500W		
	HC - SFS103	1kW		
	HC - SFS153	1.5kW		
	HC - SFS203	2kW		
	HC - SFS353	3.5kW		
	HC - SFS53B	500W		
	HC - SFS103B	1kW		
	HC - SFS153B	1.5kW		
	HC - SFS203B	2kW		
HC - SFS353B	3.5kW			

∴

HC - LFS2000r/min < > A : B3 B : B3 CP : A2	HC - LFS52	500W	
	HC - LFS102	1kW	
	HC - LFS152	1.5kW	
	HC - LFS202	2kW	
	HC - LFS302	3kW	
	HC - LFS52B	500W	
	HC - LFS102B	1kW	
	HC - LFS152B	1.5kW	
	HC - LFS202B	2kW	
	HC - LFS302B	3kW	
	HC - RFS2000r/min < > 3.5kW, 5.0kW A : B0 B : B0	HC - RFS103	
HC - RFS153		1.5kW	
HC - RFS203		2kW	
HC - RFS353		3.5kW	
HC - RFS503		5kW	
HC - RFS103B		1kW	
HC - RFS153B		1.5kW	
HC - RFS203B		2kW	
HC - RFS353B		3.5kW	
HC - RFS503B		5kW	
HC - RFS103(B)G2 1/5		1kW (1/5)	
HC - RFS103(B)G2 1/9		1kW (1/9)	
HC - RFS103(B)G2 1/20		1kW (1/20)	
HC - RFS103(B)G2 1/29		1kW (1/29)	
HC - RFS103(B)G2 1/45		1kW (1/45)	
HC - RFS153(B)G2 1/5		1.5kW (1/5)	
HC - RFS153(B)G2 1/9		1.5kW (1/9)	
HC - RFS153(B)G2 1/20		1.5kW (1/20)	
HC - RFS153(B)G2 1/29		1.5kW (1/29)	
HC - RFS153(B)G2 1/45		1.5kW (1/45)	
HC - RFS203(B)G2 1/5		2kW (1/5)	
HC - RFS203(B)G2 1/9		2kW (1/9)	
HC - RFS203(B)G2 1/20		2kW (1/20)	
HC - RFS203(B)G2 1/29		2kW (1/29)	
HC - RFS203(B)G2 1/45		2kW (1/45)	
HC - RFS353(B)G2 1/5		3.5kW (1/5)	
HC - RFS353(B)G2 1/9		3.5kW (1/9)	
HC - RFS353(B)G2 1/20		3.5kW (1/20)	
HC - RFS353(B)G2 1/29		3.5kW (1/29)	
HC - RFS503(B)G2 1/5		5kW (1/5)	
HC - RFS503(B)G2 1/9		5kW (1/9)	
HC - RFS503(B)G2 1/20		5kW (1/20)	
HC - RFS103(B)G5 1/5		1kW (1/5)	
HC - RFS103(B)G5 1/11		1kW (1/11)	
HC - RFS103(B)G5 1/21		1kW (1/21)	
HC - RFS103(B)G5 1/33		1kW (1/33)	
HC - RFS103(B)G5 1/45		1kW (1/45)	
HC - RFS153(B)G5 1/5		1.5kW (1/5)	
HC - RFS153(B)G5 1/11		1.5kW (1/11)	
HC - RFS153(B)G5 1/21		1.5kW (1/21)	
HC - RFS153(B)G5 1/33		1.5kW (1/33)	
HC - RFS153(B)G5 1/45		1.5kW (1/45)	
HC - RFS203(B)G5 1/5		2kW (1/5)	
HC - RFS203(B)G5 1/11		2kW (1/11)	
HC - RFS203(B)G5 1/21		2kW (1/21)	
HC - RFS203(B)G5 1/33	2kW (1/33)		
HC - RFS203(B)G5 1/45	2kW (1/45)		

⋮

HC - RFS2000r/min < > 3.5kW, 5.0kW A : B0 B : B0	HC - RFS353(B)G5 1/5	3.5kW (1/5)	()			
	HC - RFS353(B)G5 1/11	3.5kW (1/11)				
	HC - RFS353(B)G5 1/21	3.5kW (1/21)				
	HC - RFS353(B)G5 1/33	3.5kW (1/33)				
	HC - RFS503(B)G5 1/5	5kW (1/5)				
	HC - RFS503(B)G5 1/11	5kW (1/11)				
	HC - RFS503(B)G5 1/21	5kW (1/21)				
	HC - RFS103(B)G7 1/5	1kW (1/5)		()		
	HC - RFS103(B)G7 1/11	1kW (1/11)				
	HC - RFS103(B)G7 1/21	1kW (1/21)				
	HC - RFS103(B)G7 1/33	1kW (1/33)				
	HC - RFS103(B)G7 1/45	1kW (1/45)				
	HC - RFS153(B)G7 1/5	1.5kW (1/5)				
	HC - RFS153(B)G7 1/11	1.5kW (1/11)				
	HC - RFS153(B)G7 1/21	1.5kW (1/21)				
	HC - RFS153(B)G7 1/33	1.5kW (1/33)				
	HC - RFS153(B)G7 1/45	1.5kW (1/45)				
	HC - RFS203(B)G7 1/5	2kW (1/5)				
	HC - RFS203(B)G7 1/11	2kW (1/11)				
	HC - RFS203(B)G7 1/21	2kW (1/21)				
	HC - RFS203(B)G7 1/33	2kW (1/33)				
	HC - RFS203(B)G7 1/45	2kW (1/45)				
	HC - RFS353(B)G7 1/5	3.5kW (1/5)				
	HC - RFS353(B)G7 1/11	3.5kW (1/11)				
	HC - RFS353(B)G7 1/21	3.5kW (1/21)				
	HC - RFS353(B)G7 1/33	3.5kW (1/33)				
	HC - RFS503(B)G7 1/5	5kW (1/5)				
	HC - RFS503(B)G7 1/11	5kW (1/11)				
HC - RFS503(B)G7 1/21	5kW (1/21)					
HA - LFS1000r/min < > 6kW(200V) A : B5 B : B4 25kW, 30kW(200V) A : A2 B : A5 37kW(200V) A : B1 B : B1 37kW(400V) A : B1 B : B1 A : A0 B : A3 < > 6kW(400V) : MR - J2S - 700 4 - U071 8kW(400V) : MR - J2S - 11K 4 - U061 12kW(400V) : MR - J2S - 11K 4 - U062 15kW(400V) : MR - J2S - 15K 4 - U063 20kW(400V) : MR - J2S - 22K 4 - U064 25kW(400V) : MR - J2S - 30K 4 - U065	HA - LFS601	6kW	200V			
	HA - LFS801	8kW				
	HA - LFS12K1	12kW				
	HA - LFS15K1	15kW				
	HA - LFS20K1	20kW				
	HA - LFS25K1	25kW				
	HA - LFS30K1	30kW				
	HA - LFS37K1	37kW				
	HA - LFS6014 (1)	6kW			400V	
	HA - LFS8014 (1)	8kW				
	HA - LFS12K14 (1)	12kW				
	HA - LFS15K14	15kW				
	HA - LFS20K14 (1)	20kW				
	HA - LFS25K14 (1)	25kW				
	HA - LFS30K14	30kW				
	HA - LFS37K14	37kW				
	HA - LFS601B	6kW	200V			
	HA - LFS801B	8kW				
	HA - LFS12K1B	12kW				
	HA - LFS6014B (1)	6kW	400V			
HA - LFS8014B (1)	8kW					
HA - LFS12K14B (1)	12kW					
HA - LFS1500r/min < > 7kW(200V) A : B6 B : A5 11kW, 15kW, 22kW, 30kW(200V) A : A0 B : A3 37kW(200V) A : A3 B : B0	HA - LFS701M (1)	7kW	200V			
	HA - LFS11K1M	11kW				
	HA - LFS15K1M	15kW				
	HA - LFS22K1M	22kW				
	HA - LFS30K1M	30kW				
	HA - LFS37K1M	37kW				

HA - LFS1500r/min < > 11kW(400V) A : A0 B : A4 22kW, 30kW(400V) A : A2 B : A5 45kW(400V) A : A1 B : A4 A : A0 B : A3 < > 7kW(400V) : MR-J2S-700 4-U073	HA - LFS701M4 (1)	7kW	400V		
	HA - LFS11K1M4	11kW			
	HA - LFS15K1M4	15kW			
	HA - LFS22K1M4	22kW			
	HA - LFS30K1M4	30kW			
	HA - LFS37K1M4	37kW			
	HA - LFS45K1M4	45kW	200V		
	HA - LFS50K1M4	50kW			
	HA - LFS701MB (1)	7kW			
	HA - LFS11K1MB	11kW	400V		
	HA - LFS15K1MB	15kW			
	HA - LFS701M4B (1)	7kW			
HA - LFS11K1M4B	11kW				
HA - LFS15K1M4B	15kW				
HA - LFS2000r/min < > A ,B : B0	HA - LFS502	5kW	200V		
	HA - LFS702	7kW			
HA - LFS2000r/min < > 15kW(400V) A : A3 B : A6 A : A0 B : A3	HA - LFS11K2	11kW	200V		
	HA - LFS15K2	15kW			
	HA - LFS22K2	22kW			
	HA - LFS30K2	30kW			
	HA - LFS37K2	37kW			
	HA - LFS11K24	11kW	400V		
	HA - LFS15K24	15kW			
	HA - LFS22K24	22kW			
	HA - LFS30K24	30kW			
	HA - LFS37K24	37kW			
	HA - LFS45K24	45kW	200V		
	HA - LFS55K24	55kW			
	HA - LFS11K2B	11kW			
	HA - LFS15K2B	15kW	400V		
	HA - LFS22K2B	22kW			
	HA - LFS11K24B	11kW			
	HA - LFS15K24B	15kW			
	HA - LFS22K24B	22kW			
HC - UFS2000r/min < > 3.5kW, 5.0kW A : B0 B : B0	HC - UFS72	750W			
	HC - UFS152	1.5kW			
	HC - UFS202	2kW			
	HC - UFS352	3.5kW			
	HC - UFS502	5kW			
	HC - UFS72B	750W			
	HC - UFS152B	1.5kW			
	HC - UFS202B	2kW			
	HC - UFS352B	3.5kW			
	HC - UFS502B	5kW			
	HC - UFS3000r/min	HC - UFS13			
HC - UFS23		200W			
HC - UFS43		400W			
HC - UFS73		750W			
HC - UFS13B		100W			
HC - UFS23B		200W			
HC - UFS43B		400W			
HC - UFS73B		750W			
HC - UFS13(B) - S1		100W	IP65()	()	
HC - UFS23(B) - S1		200W			
HC - UFS43(B) - S1		400W			
HC - UFS73(B) - S1		750W			
	MR - JACN15K	MR - J2S - 11K (4),MR - J2S - 15K (4)			

	MR - JACN22K	MR - J2S - 22K (4)	
	MR - ACNP55K	MR - HP30KA, MR - HP55KA4	
	MR - ACN30K	MR - J2S - 30K 4	
	MR - ACN55K	MR - J2S - 30K ,37K ,37K 4, 45K 4, 55K 4	
	MR - BAT	.	
	MR - HDP01	MR - J2S - CP MR - J2S - CL	
	MR - DP60	7 LED 6 , MR - J2S - CP MR - J2S - CL	
	MR - RB032	30W, 40	200V
	MR - RB12	100W, 40	
	MR - RB30	300W, 13	
	MR - RB31	300W, 6.7	
	MR - RB32	300W, 40	
	MR - RB50	500W, 13	
	MR - RB51	500W, 6.7	
	MR - RB65	500(800)W, 8	
	MR - RB66	850(1300)W, 5	
	MR - RB67	850(1300)W, 4	
	MR - RB139	1300W, 1.3	
	MR - RB137	3900W, 1.3 (3 1 . 1 3 .)	
	MR - RB1L - 4	100W, 270	400V
	MR - RB3M - 4	300W, 120	
	MR - RB3H - 4	300W, 80	
	MR - RB3G - 4	300W, 47	
	MR - RB34 - 4	300W, 26	
	MR - RB5H - 4	500W, 80	
	MR - RB5G - 4	500W, 47	
	MR - RB54 - 4	500W, 26	
	MR - RB6B - 4	500(800)W, 20	
	MR - RB60 - 4	850(1300)W, 12.5	
	MR - RB6K - 4	850(1300)W, 10	
	MR - RB136 - 4	1300W, 5	
MR - RB138 - 4	3900W, 5 (3 1 . 1 3 .)		
	DBU - 11K	MR - J2S - 11K	
	DBU - 15K	MR - J2S - 15K	
	DBU - 22K	MR - J2S - 22K	
	DBU - 37K	MR - J2S - 30K ,37K	
	DBU - 11K - 4	MR - J2S - 11K 4	
	DBU - 22K - 4	MR - J2S - 15K 4, MR - J2S - 22K 4	
	DBU - 55K - 4	MR - J2S - 30K 4, 37K 4, 45K 4, 55K 4	
	MR - DCL30K	MR - J2S - 30K	
	MR - DCL37K	MR - J2S - 37K	
	MR - DCL30K - 4	MR - J2S - 30K 4	
	MR - DCL37K - 4	MR - J2S - 37K 4	
	MR - DCL45K - 4	MR - J2S - 45K 4	
	MR - DCL55K - 4	MR - J2S - 55K 4	
MR Configurator (-)	MRZJW3 - SETUP161	- (1)	
	MR - J2LL	TE2 L1, L2 .1 10	

) 1. -SETUP111 MR - J2S - B , -SETUP121 5,7kW -SETUP141 MR - J2S - CP
 MR - J2S - 11KB - 37KB -SETUP151 E1
 MR - J2S - 11KA - 37KA MR - J2S - 11KA4 - 55KA4 -SETUP151 E2
 MR - J2S - 60A4 - 700A4 MR - J2S - 60B4 - 55KB4 -SETUP161
 MR - J2S - CP - S084 MR - J2S - CL -SETUP161

(MR-J2)

A
B
CP
CL

<MR-J2S- A>



		MR-J2S- A	MR-J2- A
/		MR-J2- A /MR-J2- A	-
		AC100V : 0.05~0.4kW AC200V : 0.05~37kW AC400V : 0.5~55kW	AC100V : 0.05~0.4kW AC200V : 0.05~3.5kW AC400V : -
		MR-J2- A () . RS-422 가	-
LED /		5 1 2 3 4 5 / 4	4 1 2 3 4 / 4
		RS-232C RS-422	RS-232C
		500kpps()	400kpps()

<MR-J2S- B>

		MR-J2S- B	MR-J2- B
/		MR-J2- B /MR-J2- B	-
		AC100V : 0.05~0.4kW AC200V : 0.05~37kW AC400V : 0.5~55kW	AC100V : - AC200V : 0.05~3.5kW AC400V : -
		MR-J2- B () . (ABZ) 가	-

<MR-J2S- CP>

		MR-J2S- CP	MR-J2- C
/		MR-J2- C /MR-J2- C	-
		AC100V : 0.05~0.4kW AC200V : 0.05~7kW	AC100V : - AC200V : 0.05~3.5kW
		MR-J2- C ()	-
LED /		5 1 2 3 4 5 / 4	4 1 2 3 4 / 4
		MR-J2- C	-
		CC-Link	-

		HC- S, HA-LFS	HC-
/		ABS 17bit(131072 p/rev)	ABS 13bit(8192 p/rev), 14bit(16384 p/rev)
		 <HC-KFS, MFS, UFS 3000r/min> () 5557-04R-210(,) 5557-06R-210(,) 5556PBT(凹)	 <(HC-KF, MF, UF 3000r/min)> (,)
		AC200V : 0.05~37kW AC400V : 0.5~55kW	AC200V : 0.05~3.5kW
		HC-KFS, MFS, SFS, RFS : G5, G7 가	-
		HC-KFS, MFS : IP55 (IP65) ()	HC-KF, MF : IP44 (IP65) ()

) IP65

50W

MR-J2S

(HC- S

HA-LFS)

MR-J2

MR-J2

A series of horizontal dashed lines for writing.

A series of horizontal dashed lines for writing.



● **상해 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION(SHANGHAI) LTD.
80 Xin Chang Road, 4th Floor,
Shanghai Intelligence Fortune Leisure Plaza
Huang Pu district, Shanghai 200003, China
Tel : 86-21-6121-2460 Fax : 86-21-6121-2424

● **북경 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION(SHANGHAI) LTD.
BEIJING OFFICE
Unit 917/918, 9/F Office Tower 1,
Henderson Center, 18 Jianguomennei Dajie,
Dongcheng District, Beijing 100005, China
Tel : 86-10-6518-8830 Fax : 86-10-6518-8030

● **천진 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION(SHANGHAI) LTD.
TIANJIN OFFICE
B-2 801/802 Youyi Building,
No.50 Youyi Road, Hexi District,
Tianjin 300061, China
Tel : 86-22-2813-1015 Fax : 86-22-2813-1017

● **홍콩 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION(HONG KONG) LTD. (FA DIVISION)
10th Floor, Manulife Tower, 169 Electric Road,
North Point, Hong Kong
Tel : 852-2887-8870 Fax : 852-2887-7984

● **대만 FA센터**

• SETSUYO ENTERPRISE CO., LTD.
6F No.105 Wu Kung 3rd RD, Wu-Ku Hsiang,
Taipei Hsien, Taiwan
Tel : 886-2-2299-2499 Fax : 886-2-2299-2509

● **한국 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.
1480-6 Gayang-dong, Gangseo-gu, Seoul 157-200, Korea
Tel : 82-2-3660-9607 Fax : 82-2-3663-0475

● **태국 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION THAILAND CO., LTD.
Bang-Chan Industrial Estate No.111
Moo4, Serithai Road, T.kannayao A.kannayao
Bangkok 10230, Thailand

● **아세안 FA센터**

• MITSUBISHI ELECTRIC ASIA PTE, LTD.
307 Alexandra Road #05-01/02
Mitsubishi Electric Building, Singapore 159943
Tel : 65-6470-2480 Fax : 65-6476-7439

● **북미 FA센터**

• MITSUBISHI ELECTRIC AUTOMATION, INC.
500 Corporate Woods Parkway, Vernon Hills, IL 60061, USA
Tel : 1-847-478-2330 Fax : 1-847-478-2396

● **유럽 FA센터**

• MITSUBISHI ELECTRIC EUROPE B.V. GERMAN BRANCH
Gothaer Strasse 8 D-40880 Ratingen, GERMANY
Tel : 49-2102-486-2630 Fax : 49-2102-486-7170

● **영국 FA센터**

• MITSUBISHI ELECTRIC EUROPE B.V. UK BRANCH
(Customer Technology Centre)
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, U.K.
Tel : 44-1707-278843 Fax : 44-1707-278992



본 사: 157-200 서울특별시 강서구 가양동 1480-6
TEL. 02)3660-9515~19 FAX. 02)3664-8372/8335

부산영업소: 617-726 부산광역시 사상구 과법동 578
산업용품유통상가 업무동 206호
TEL. 051)319-3747 FAX. 051)319-3768

대구영업소: 702-845 대구광역시 북구 산격2동 1666
종합유통단지 전기조명관 업무동 603호
TEL. 053)604-6047 FAX. 053)604-6049

F.A 센터: 서울특별시 강서구 가양동 1480-6 2F
TEL. 02)3660-9607 FAX. 02)3663-0475

<http://www.mitsubishi-automation.co.kr>

